



Item # \_\_\_\_\_

Job \_\_\_\_\_



# Metro C5 8 Series Controlled Temperature Holding Cabinet

- **Control:** The intuitive C5 8 Series controller provides continuous closed loop monitoring of temperature providing accurate control over the internal environment of the cabinet, resulting in safe and hot food. Actual temperature is measured, displayed, and controlled.
- **Performance:** Rapid heat-up and recovery times are achieved with a digitally controlled ducted heating system. The intelligent controller assures food is held at the desired temperature. Low temperature alarm assures cabinet is performing within desired temperature range. Full Height, 3/4 Height, and 1/2 Height (stainless steel) models are Energy Star.
- **Sizes:** C5 is designed to fit your application with four cabinet sizes; Full Height (74.75"), 3/4 Height (62.75"), 1/2 Height (44.75"), and Under Counter (32.25").
- **Doors:** C5 cabinets are all available with a choice of insulated solid or clear double pane, Low-E, tempered glass doors. Clear doors provide visibility of the contents of the cabinet without the heat loss associated with opening the door. Full Height cabinets can be configured with standard full length or Dutch style doors. All doors lift off and are field reversible.
- **Pass-Thru:** Full Height, 3/4 Height, and 1/2 Height sizes are available as pass-thru models.
- **Capacity:** Universal slides hold 18"x26" sheet pans or 12"x20" steam table pans on adjustable 1 1/2" increments. Lip load slides hold 18"x26" sheet pans on 1 1/2" increments. Optional Wire Shelf interfaces with universal slide system to accommodate small items and pans.
- **Reliability:** Reliability and durability are designed into C5 from the ground up. High-quality components and robust construction provide a long life of service and worry-free use.
- **Top-Mounted Controls:** Ergonomic user-friendly controls are mounted at the top of the cabinet for easier access, better readability, to prevent damage, and to simplify cleaning.
- **Passive Humidity:** An integral water pan system can be used to add humidity to the cabinet environment, improving food quality.
- **Construction:** Available in both stainless steel and aluminum for a variety of applications.
- **NAFEM Data Protocol:** The C5 8 Series controller is NDP capable.



Full Height  
Dutch Solid  
Doors



Full Height  
Dutch Clear Doors



Full Height  
Full Clear Door



Full Height  
Full Solid Door



3/4 Height  
Full Clear Door



1/2 Height  
Full Solid Door



Under Counter  
Full Clear Door

### Options/Accessories:

- Small Item Shelf (C5-SHELF)
- Stainless Steel Legs (C5-SSLEGS)
- Universal Slide Pair (C5-USLIDECPR)
- Right Angle Plug (C5-RTANGPLG)
- Twist Lock Plug (C5-RTWSTPLG)
- Flush Door Latch (C5-LATCHFLUSH)
- Twist Lock Door Latch (C5-LATCHTWST)
- Control Panel Cover (C5-COVER)

\*Patents Pending



**InterMetro Industries Corporation**  
North Washington Street  
Wilkes-Barre, PA 18705  
www.metro.com



Metro C5 8 Series Controlled Temperature Holding Cabinet

13.98



# Metro C5 8 Series Controlled Temperature Holding Cabinet


## Specifications

- Cabinet Material:** Type 304 stainless steel; 20-gauge polished exterior; 22-gauge interior, or .063" aluminum, brushed exterior, natural interior.
- Insulation:** Full perimeter, 1" thick, high-density fiberglass. R Value=4.2
- Casters:** Four casters with 5" donut neoprene wheel, double ball bearing swivel, ball bearing axle, nickel plated, two with brake. 3" rubber casters on Under Counter models.
- Solid Doors:** Fully insulated, double-panel, Type 304, 20-gauge polished exterior, 22-gauge interior stainless steel or .063" aluminum, brushed exterior, natural interior.
- Hinges:** Self-closing, lift-off, double hinged, with long-life nylon bearings.
- Gaskets:** High temperature, cabinet mounted, Santoprene gaskets.
- Latches:** Chrome plated, high-strength magnetic pull latch with lever-action release.
- Handles:** Four built-in polymer handles.
- Universal Slides:** Universal wire slides; 1/4" diameter nickel-chrome wire adjustable on 1 1/2" increments. 16-gauge, Type 304, stainless steel vertical standards.
- Lip Load Slides:** 1 1/2"x1 1/2"x.063" extruded aluminum channel slides on .063" Aluminum vertical standards.
- Slide Capacities:**

Cabinet Size	Universal Slides				Lip Load Slide Pan Capacity 18"x26"
	Slide Pairs Provided	Max.*	Pan Capacity**		
			18"x26"	12"x20"x2 1/2"	
Full Height	18	37	18	36	36
Full Height/Dutch	18	35	17	34	35
3/4 Height	14	29	14	28	29
1/2 Height	8	17	8	16	17
Under Counter	5	10	5	10	10

\*Maximum number of slide pairs @ 1 1/2" spacing. Additional slide pairs ordered separately.  
\*\*Capacity based on standard number of slide pairs provided on 3" spacing.

- Display and Controls:** Intelligent cabinet temperature control with digital display.
- Heat Generation System:** Thermostatically controlled closed loop feedback with 1950 Watt heating element, ball bearing blower motor, and ducted air system. Low temperature alarm enable/disable.
- Cord:** 7 1/2' cord with NEMA 5-20P plug. Cord mounted on top (Full, 3/4, Pass Thru) or back (1/2, Under Counter) can be field reversed.
- Thermal Performance:** 70° F to 200° F operating temperature range.
- Power Requirements:** 2000 Watts, 120 Volts, 60 Hz., single phase, 20 Amp. Service (16 Amps Draw).
- Dimensions:**

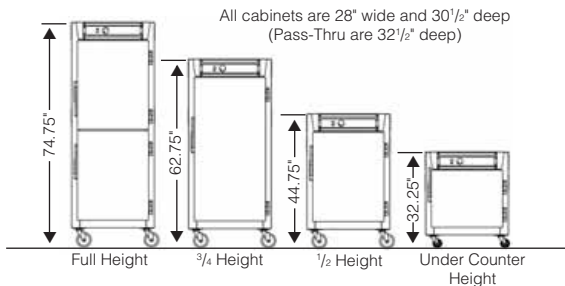

## Part Numbers

FULL HEIGHT CABINETS			
Stainless Part #	Aluminum Part #	Doors	Slides
C589-SFS-U	C589-NFS-U	Full Solid	Universal
C589-SFS-L	C589-NFS-L	Full Solid	Lip Load
C589-SDS-U	C589-NDS-U	Dutch Solid	Universal
C589-SDS-L	C589-NDS-L	Dutch Solid	Lip Load
C589-SFC-U	C589-NFC-U	Full Clear	Universal
C589-SFC-L	C589-NFC-L	Full Clear	Lip Load
C589-SDC-U	C589-NDC-U	Dutch Clear	Universal
C589-SDC-L	C589-NDC-L	Dutch Clear	Lip Load
FULL HEIGHT, PASS THRU CABINETS			
Stainless Part #	Aluminum Part #	Doors	Slides
C589-SFS-UPFS	C589-NFS-UPFS	Full Solid/Full Solid	Universal
C589-SFS-UPFC	C589-NFS-UPFC	Full Solid/Full Clear	Universal
C589-SFS-LPFS	C589-NFS-LPFS	Full Solid/Full Solid	Lip Load
C589-SFS-LPFC	C589-NFS-LPFC	Full Solid/Full Clear	Lip Load
C589-SDS-UPDS	C589-NDS-UPDS	Dutch Solid/Dutch Solid	Universal
C589-SDS-UPDC	C589-NDS-UPDC	Dutch Solid/Dutch Clear	Universal
C589-SDS-LPDS	C589-NDS-LPDS	Dutch Solid/Dutch Solid	Lip Load
C589-SDS-LPDC	C589-NDS-LPDC	Dutch Solid/Dutch Clear	Lip Load
C589-SFC-UPFC	C589-NFC-UPFC	Full Clear/Full Clear	Universal
C589-SFC-UPFS	C589-NFC-UPFS	Full Clear/Full Solid	Universal
C589-SFC-LPFC	C589-NFC-LPFC	Full Clear/Full Clear	Lip Load
C589-SFC-LPFS	C589-NFC-LPFS	Full Clear/Full Solid	Lip Load
C589-SDC-UPDC	C589-NDC-UPDC	Dutch Clear/Dutch Clear	Universal
C589-SDC-UPDS	C589-NDC-UPDS	Dutch Clear/Dutch Solid	Universal
C589-SDC-LPDC	C589-NDC-LPDC	Dutch Clear/Dutch Clear	Lip Load
C589-SDC-LPDS	C589-NDC-LPDS	Dutch Clear/Dutch Solid	Lip Load
3/4 HEIGHT CABINETS			
Stainless Part #	Aluminum Part #	Doors	Slides
C587-SFS-U	C587-NFS-U	Full Solid	Universal
C587-SFS-L	C587-NFS-L	Full Solid	Lip Load
C587-SFC-U	C587-NFC-U	Full Clear	Universal
C587-SFC-L	C587-NFC-L	Full Clear	Lip Load
3/4 HEIGHT, PASS-THRU CABINETS			
Stainless Part #	Aluminum Part #	Doors	Slides
C587-SFS-UPFS	C587-NFS-UPFS	Full Solid/Full Solid	Universal
C587-SFS-UPFC	C587-NFS-UPFC	Full Solid/Full Clear	Universal
C587-SFS-LPFS	C587-NFS-LPFS	Full Solid/Full Solid	Lip Load
C587-SFS-LPFC	C587-NFS-LPFC	Full Solid/Full Clear	Lip Load
C587-SFC-UPFC	C587-NFC-UPFC	Full Clear/Full Clear	Universal
C587-SFC-UPFS	C587-NFC-UPFS	Full Clear/Full Solid	Universal
C587-SFC-LPFC	C587-NFC-LPFC	Full Clear/Full Clear	Lip Load
C587-SFC-LPFS	C587-NFC-LPFS	Full Clear/Full Solid	Lip Load
1/2 HEIGHT CABINETS			
Stainless Part #	Aluminum Part #	Doors	Slides
C585-SFS-U	C585-NFS-U	Full Solid	Universal
C585-SFS-L	C585-NFS-L	Full Solid	Lip Load
C585-SFC-U	C585-NFC-U	Full Clear	Universal
C585-SFC-L	C585-NFC-L	Full Clear	Lip Load
1/2 HEIGHT, PASS-THRU CABINETS			
Stainless Part #	Aluminum Part #	Doors	Slides
C585-SFS-UPFS	C585-NFS-UPFS	Full Solid/Full Solid	Universal
C585-SFS-UPFC	C585-NFS-UPFC	Full Solid/Full Clear	Universal
C585-SFS-LPFS	C585-NFS-LPFS	Full Solid/Full Solid	Lip Load
C585-SFS-LPFC	C585-NFS-LPFC	Full Solid/Full Clear	Lip Load
C585-SFC-UPFC	C585-NFC-UPFC	Full Clear/Full Clear	Universal
C585-SFC-UPFS	C585-NFC-UPFS	Full Clear/Full Solid	Universal
C585-SFC-LPFC	C585-NFC-LPFC	Full Clear/Full Clear	Lip Load
C585-SFC-LPFS	C585-NFC-LPFS	Full Clear/Full Solid	Lip Load
UNDER COUNTER CABINETS			
Stainless Part #	Aluminum Part #	Doors	Slides
C583-SFS-U	C583-NFS-U	Full Solid	Universal
C583-SFS-L	C583-NFS-L	Full Solid	Lip Load
C583-SFC-U	C583-NFC-U	Full Clear	Universal
C583-SFC-L	C583-NFC-L	Full Clear	Lip Load

Metro Heated cabinets are for food holding applications only.

All Metro Catalog Sheets are available on our Web Site: [www.metro.com](http://www.metro.com)



**InterMetro Industries Corporation**  
 North Washington Street, Wilkes-Barre, PA 18705  
 Phone: 570-825-2741 • Fax: 570-825-2852  
 For Product Information Call: 1-800-433-2232

L03-265  
 Printed in U.S.A. 5/06  
 Information and specifications are subject to change without notice. Please confirm at time of order.  
 Copyright © 2006 InterMetro Industries Corp.

