

STAINLESS STEEL

ENCLOSED BASE CABINETS with DRAWERS

Features Fully Enclosed NSF Drawers

<i>Item #:</i>	Qty #:
Model #:	
Project #:	





HINGED DOOR CABINET

MODEL #	LENGTH	# of Drawers	# of Doors	Wt.
HDRC-305	60"	2	2	350 Lbs.
HDRC-306	72"	2	4	380 Lbs.
HDRC-307	84"	3	4	450 Lbs.
HDRC-308	96"	3	4	515 Lbs.
HDRC-3010	120"	4	4	650 Lbs.



SLIDING DOOR CABINET

MODEL #	LENGTH	# of Drawers	# of Doors	Wt.
SDRC-305	60"	2	2	350 Lbs.
SDRC-306	72"	2	4	380 Lbs.
SDRC-307	84"	3	4	450 Lbs.
SDRC-308	96"	3	4	515 Lbs.
SDRC-3010	120"	4	4	650 Lbs.

Sliding Doors

FEATURES:

5" SPLASH is furnished with a 1 5/8" sanitary rolled rim on the front side and 1 5/8" square bend edges on the 2 sides and a 5" splash with a 1" return on the rear side.

Rear flush panel along the rear of the base unit.

TA-

CONSTRUCTION:All TIG welded. Exposed areas finished to match adjacent surf

All TIG welded. Exposed areas finished to match adjacent surfaces.

Entire Top is mechanically polished to a satin finish and is sound deadened.

UNIT-BODY DESIGN sides, back and fixed mid shelf are welded to form a single rigid structure.

MATERIAL:

TOP is 14 gauge stainless steel type "304" series with galvanized understructure. BODY is 18 gauge stainless steel type "430" series.

LEGS and 1" adjustable bullet feet with gussets are Stainless Steel.

ACCESSORIES

Model #	Description	Qty.
TA-105	Mod. to 24" Width	
TA-110	Mod. to 36" Width	
TA-14	Drawer Lock	
TA-46	Door Locks	

Mid Shelves and Adjustable Shelves (TA-116) Are Available



Customer Service Available To Assist You 1-800-645-3166 8:30 am - 8:00 pm E.S.T.

Email Orders To: customer@advancetabco.com. For Smart Fabrication™ Quotes, Email To: smartfab@advancetabco.com or Fax To: 631-586-2933

NEW YORK Fax: (631) 242-6900 **GEORGIA** Fax: (770) 775-5625


TEXAS Fax: (972) 932-4795 **NEVADA** Fax: (775) 972-1578

DETAILS and SPECIFICATIONS

TOL ± .500"

Units 7' and larger are furnished with 6 legs.

ALL DIMENSIONS ARE TYPICAL

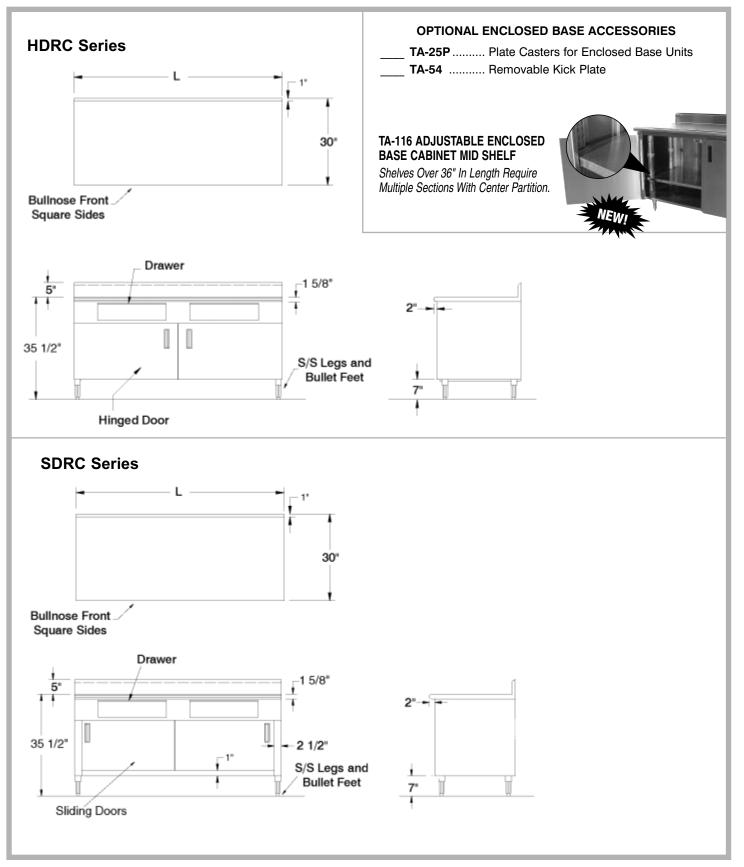



ADVANCE TABCO is constantly engaged in a program of improving our products. Therefore, we reserve the right to change specifications without prior notice.