

PRODUCT:

QUANTITY:

ITEM:

Designed Smart

This unit is constructed of stainless steel with 4" heavy-duty legs as standard, on Counter Mount and Pass-through models. Top, sides and back (except pass-through model) are fully insulated with high quality insulation. Special designed control allows unit to maintain standby level with 25% of heating capacity.

Unit has four shelf height "micro switch" that is activated by placing a plate on the shelf, which provides ultimate finishing capabilities. All controls are solid-state with electrical fan-cooled compartment. Infrared heaters are easy to snap-in and out. All hardware is stainless steel. All units are single phase.



Model: CMC-24

APW Wyott Design Features

- Top, sides and back (except pass-through model) are fully insulated with 1" of high quality insulation.
- When the master switch is "on", the unit stays "on" at 25% of heating capacity.
- Four shelf height "micro switch"
- Food placed on rack activates heat to 100% heat "on"
- The 24" and 36" models have one unit "on-off" switch and one red unit "on" light
- The 48" model has one unit "on-off" switch and one red unit "on" light. There are also right-half heater "on" switches and right and left "on" lights. Use half, or the entire unit as needed.
- Solid-state controls
- Fan-cooled electrical compartment
- Instant "on", instant "off" even heating, top quartz elements

Reliability backed by APW Wyott's Warranty

All APW Wyott hot plates are backed by a 1-year limited warranty and a 1-year on-site labor warrant. *

•Certified by the following agencies:



*Warranty does not include rock grates, cooking grates, burners shields or fireboxes.

See reverse side for product specifications.


Models CMC CMW CMP
 Counter Mount (C) Wall Mount (W) Pass-Through (P)

PRODUCT:

QUANTITY:

ITEM:

PRODUCT SPECIFICATIONS

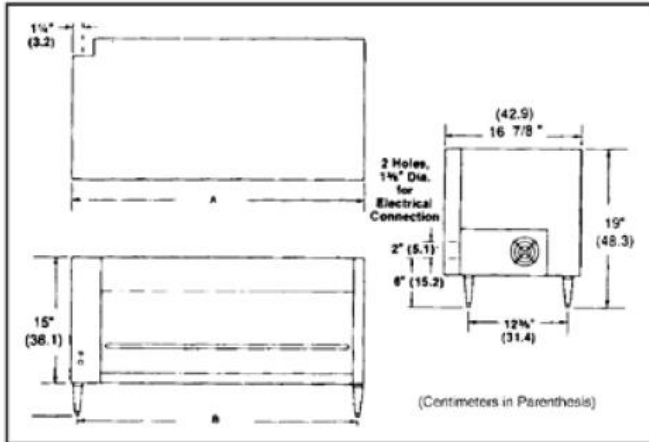

Construction:

Stainless steel construction. Top, sides and back (except pass-through model) are fully insulated with 1" of high quality insulation.

Electrical Specifications:

Units are wired for hard wiring in the field.

CMC-24 208V or 240V
 CMC-36 208V or 240V
 CMC-48 208V or 240V

Counter Mount (C)
 Wall Mount (W)
 Pass-Through (P)

Shipping:

FOB: Cheyenne, WY

| Model | Electric | Dimensions | Lbs |
|--------|--|----------------------------|----------|
| CMC-24 | 208V, 2.4KW, 11.5 Amps 240V, 2.4KW, 10.0 Amps | 19"H x 27"W x 17"D | 76 lbs. |
| CMC-36 | 208V, 3.6KW, 17.3 Amps 240V, 3.6KW, 15 Amps | 19"H x 36 1/2"W x 17"D | 92 lbs. |
| CMC-48 | 208V, 4.2KW, 20.2 Amps 240V, 4.2KW, 17.5 Amps | 19"H x 50"W x 17"D | 130 lbs. |
| CMW-24 | 208V, 2.4KW, 11.5 Amps 240V, 2.4KW, 10.0 Amps | 15"H x 27"W x 17"D | 78 lbs. |
| CMW-36 | 208V, 3.6KW, 17.3 Amps 240V, 3.6KW, 15 Amps | 15"H x 36 1/2"W x 17"D | 92 lbs. |
| CMW-48 | 208V, 4.2KW, 20.2 Amps 240V, 4.2KW, 17.5 Amps | 15"H x 50"W x 17"D | 130 lbs. |
| CMC-24 | 208V, 2.4KW, 11.5 Amps 240V, 2.4KW, 10.0 Amps | 19"H x 27"W x 15 1/8"D | 78 lbs. |
| CMC-36 | 208V, 3.6KW, 17.3 Amps 240V, 3.6KW, 15 Amps | 19"H x 36 1/2"W x 15 1/8"D | 92 lbs. |
| CMC-48 | 208V, 4.2KW, 20.2 Amps 240V, 4.2KW, 17.5 Amps | 19"H x 50"W x 15 1/8"D | 130 lbs. |