



Synergy Steam

DS-KLS

Direct Steam Stationary Kettle



OPTIONS AND ACCESSORIES

(AT ADDITIONAL CHARGE)

- Etched markings
 - ☐ Gallons
 - ☐ Litres
- Faucets
 - ☐ Single pantry faucet
 - ☐ Double pantry faucet
- Strainer
 - ☐ 1/8" perforated disc strainer
 - ☐ 1/4" perforated disk strainer
 - ☐ Solid disc strainer
- ☐ Basket inserts
- ☐ Higher working pressure
- ☐ 3" tangent drawoff
- ☐ Cold water cooling
- ☐ Steam trap assemblies
- ☐ Kettle brush kit
- ☐ Steam regulators
- ☐ Contour measuring strip

Project _____

Item No. _____

Quantity _____

- ☐ Model 20DS-KLS - 20 gallon (76 litres) direct steam stationary kettle
- ☐ Model 40DS-KLS - 40 gallon (151 litres) direct steam stationary kettle
- ☐ Model 60DS-KLS - 60 gallon (227 litres) direct steam stationary kettle
- ☐ Model 80DS-KLS - 80 gallon (303 litres) direct steam stationary kettle

CONSTRUCTION

- 316 stainless steel, one-piece welded construction
- 2/3 jacketed kettle
- All exposed surfaces shall be stainless steel
- Heavy, durable bar rim with a continuous seal weld on the underside to ensure maximum durability and sanitation.
- ASME shop inspected, stamped and registered with the National Board for operation up to a maximum working pressure of 25 PSI

STANDARD FEATURES

- Faucet bracket
- One-piece, hinged design dome cover on 20 and 40 gallon units.
- One-piece domed cover with counter balanced spring-assist on 60, 80 and 100 gallon units
- 2" sanitary tangent drawoff
- Removable 1/4" perforates stainless steel strainer
- One year parts and labor warranty*

* For all international markets, contact your local distributor.



DS-KLS STATIONARY KETTLE



BLODGETT

www.blodgett.com




44 Lakeside Avenue, Burlington, VT 05401 • Phone: (802) 658-6600 • Fax: (802) 864-0183



DS-KLS STATIONARY KETTLE

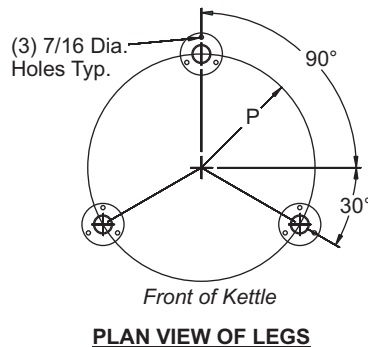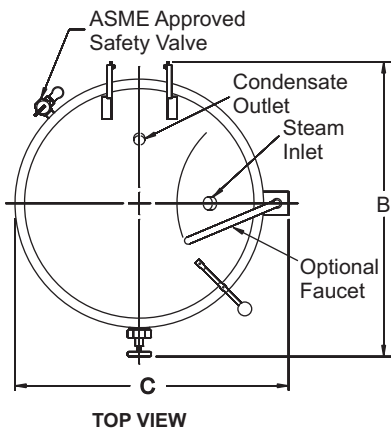

NOTE : Cover Not Shown In This View

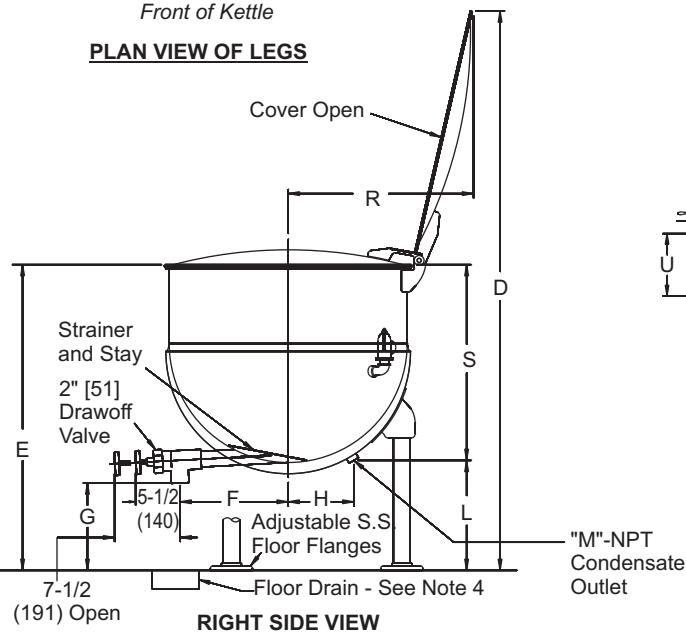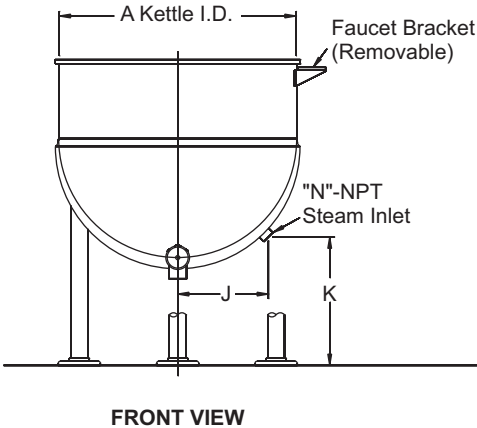

SHORT FORM SPECIFICATIONS

Provide Blodgett model 20DS-KLS (20 gallon), 40DS-KLS (40 gallon), 60DS-KLS (60 gallon) or 80DS-KLS (80 gallon) direct steam stationary kettle. Unit shall be solid one-piece welded construction with heavy duty reinforced bar rim. 2" sanitary tangent drawoff standard. 20- and 40-gallon units filled with one-piece hinged dome cover. NSF listed, ASME code constructed for 25 PSI. Steam trap assembly and direct steam source required. Provide options and accessories as indicated.

MAXIMUM PRESSURE (all models):

25 PSI (173 kPa) (optional higher working pressure is available)

SHIPPING INFORMATION:

Approx. Weight:

20DS-KLS	170 lbs. (77 kg)
40DS-KLS	220 lbs. (100 kg)
60DS-KLS	235 lbs. (107 kg)
80DS-KLS	252 lbs. (115 kg)

NOTE: The company reserves the right to make substitutions of components without prior notice.

APPROVAL/STAMP

NOTES:

1. Kettle must be securely anchored to the floor. Floor flanges are threaded and height adjustable.
2. Sanitary (1) piece dome cover shown - furnished on 20 & 40 gallon sizes.
3. Model #51 counter balanced cover furnished on kettles 60 gallon and over.
4. Position center of tangent drawoff spout 4"-5" over floor drain for proper drainage.
5. Dimensions are in inches [mm].

	20DS-KLS	40DS-KLS	60DS-KLS	80DS-KLS
A	20 (508)	26 (660)	30 (762)	32 (813)
B	27.5 (699)	33 (838)	37 (940)	38 (965)
C	24 (610)	30 (762)	34 (864)	36 (914)
D	59 (1499)	65 (1651)	67 (1702)	73 (1854)
E	36 (914)	36 (914)	39 (991)	43 (1092)
F	12 (305)	14.5 (368)	15 (381)	15 (381)
G	15.75 (400)	11.75 (299)	11.75 (299)	11.75 (299)
H	5.5 (140)	7(178)	8 (203)	8 (203)
J	8 (203))	10.25 (260)	11.5 (292)	12.25 (311)
K	17.88 (479)	15.75 (400)	16.25 (413)	16.5 (419)
L	17 (432)	14 (356)	13.5 (343)	14 (356)
M	0.5 (13)	0.5 (13)	0.5 (13)	0.75 (19)
N	0.5 (13)	0.75 (19)	0.75 (19)	1 (26)
P	9.25 (235)	11.75 (299)	13.5 (343)	14.25 (362)
R	18 (457)	25 (635)	N/A	N/A
S	18.5 (470)	22 (559)	25 (635)	29 (734)
T	14 (356)	16 (406)	17 (432)	17 (432)
U	14.75 (375)	10.75 (273)	10.75 (273)	10.75 (273)

BLODGETT

www.blodgett.com

44 Lakeside Avenue, Burlington, VT 05401 • Phone: (802) 658-6600 • Fax: (802) 864-0183