

## Thermal Server Coffee Brewer

### Features

#### Thermal Server Coffee Brewer

- Brews 3.8 gallons (14.4 litres) of perfect coffee per hour.
- Convenient thermal servers keep coffee hot and fresh for hours.
- Thermal servers are easily transported to remote meeting rooms, breakfast bars, etc.
- Pour-over model available (CW15-TS).
- Pour-over feature included on automatic models.
- Internal components are constructed from stainless steel.
- Hot water faucet available.
- SplashGard® funnel deflects hot liquids away from the hand.
- Holds up to 4" cup.



#### Model CWTF TS\* with Thermal Server

(Thermal Server not included)

Dimensions: 27.6" H x 9" W x 18.5" D  
(70.1cm H x 22.9cm W x 47cm D)

For current specification sheets and other information, go to [www.bunn.com](http://www.bunn.com).

\* International models may vary in appearance.

### Related Products

#### Easy Clear® EQ-17-TL

Product No. : 30200.1000

Dimensions:

12<sup>7</sup>/<sub>16</sub>" H x 2<sup>1</sup>/<sub>2</sub>" W x 3" D  
31.6 cm H x 6.35 cm W x 7.62 cm D



#### Easy Clear® ED-17-TL

Product No. : 30201.1001

Dimensions:

8<sup>1</sup>/<sub>4</sub>" H x 2<sup>5</sup>/<sub>16</sub>" Dia.  
20.95 cm H x 5.87 cm Dia.



#### Paper Filter Pack

Product No. : 20115.0000

Packed per case: 1,000

Dimensions:

4<sup>1</sup>/<sub>4</sub>" Base x 2<sup>3</sup>/<sub>4</sub>" Sidewall  
10.8 cm Base x 6.98 cm Sidewall



#### Thermal Server Booster\*

Product No. : 18010.6000

Capacity: 1 Thermal Server

Shipping Weight: 2 lbs.

Dimensions: 6" H x 9<sup>1</sup>/<sub>4</sub>" W x 8<sup>1</sup>/<sub>4</sub>" D

15.2 cm H x 23.5 cm W x 21 cm D



#### Thermal Server-Black

Product No. : 23300.0007

Capacity: 84 oz. (2.5 L)



\*To be used in conjunction with Thermal Server  
without base. Product No. : 23300.0010 & 23300.0006

#### Model

#### Agency Listing

CW TS



CWT TS



CWTF TS



## Dimensions & Specifications



| Model                  | Product #  | Volts | Amps | Tank Heater<br>Watts | Total<br>Watts | Brewing<br>Capacity | Cu.<br>Ft. | Shipping<br>Weight | Cord<br>Attached |
|------------------------|------------|-------|------|----------------------|----------------|---------------------|------------|--------------------|------------------|
| CW15-TS (Pourover)     | 23000.0000 | 120   | 11.4 | 1320                 | 1370           | 3.8 gal./hr.        | 7.3        | 27 lbs.            | Yes†             |
| CWT15-TS (Automatic)   | 23000.0003 | 120   | 11.4 | 1320                 | 1370           | 3.8 gal./hr.        | 7.3        | 29 lbs.            | Yes†             |
| CWTF15-TS (Automatic)* | 23000.0006 | 120   | 11.4 | 1320                 | 1370           | 3.8 gal./hr.        | 7.3        | 32 lbs.            | Yes†             |

\*Includes faucet. †Power cord (NEMA 5-15P) 15 Amp-120V machine only.

**Brewing capacity:** based upon incoming water temp of 60°F (140°F rise) per ½ gallon brew time of 4 minutes.

Electrical: 2-wires plus ground service rated 120V, single phase, 60Hz.

Plumbing: 20-90 psi (138-621 kPa). Supplied with ¼" (6.4 mm) male flare fitting.

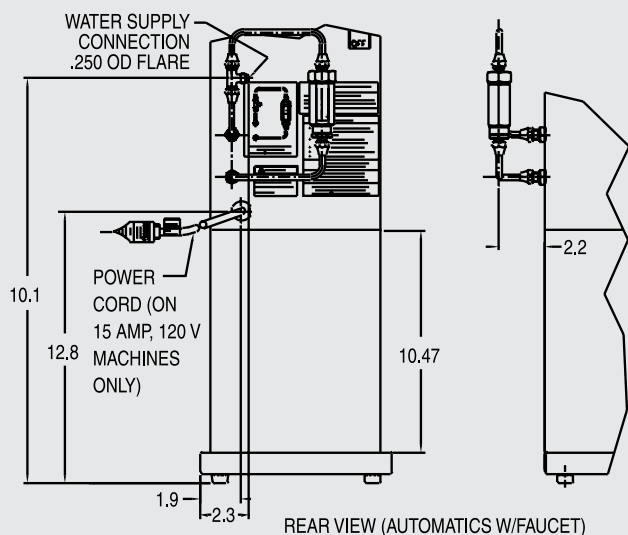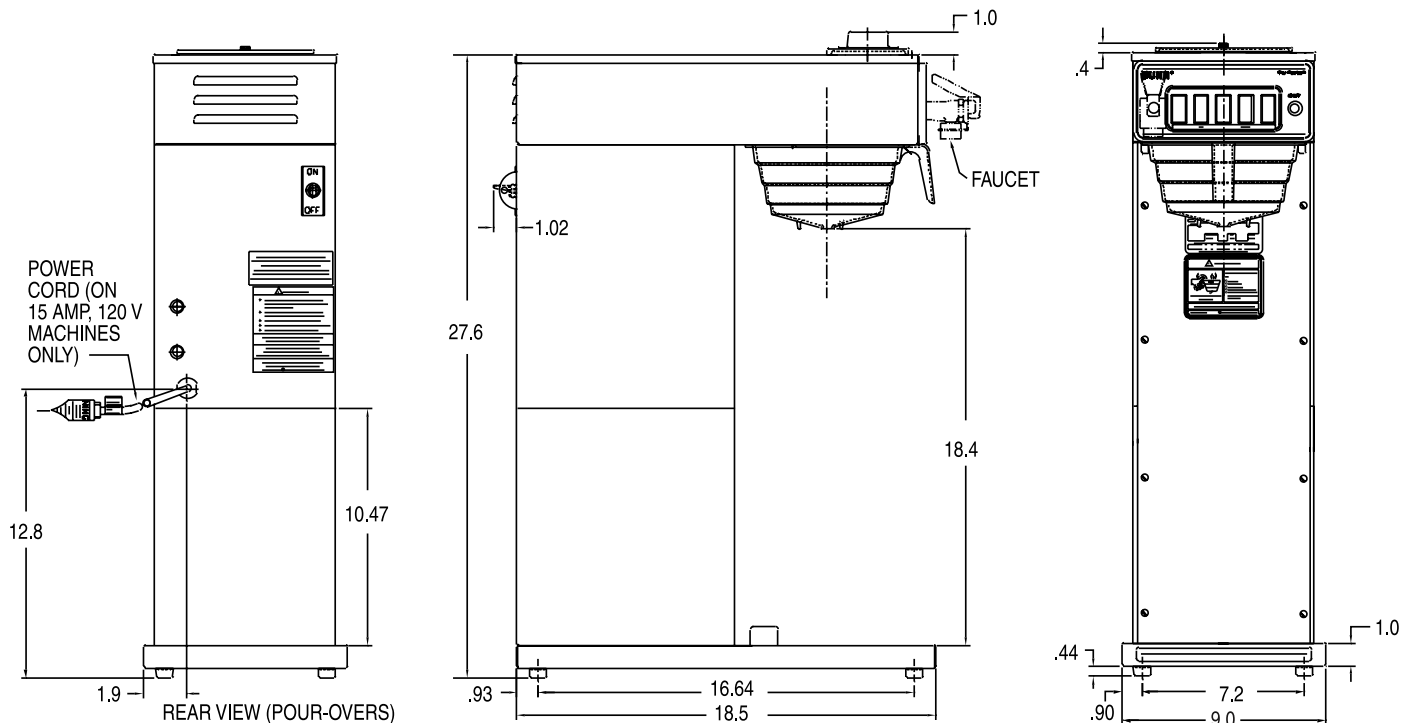

BUNN Corporation - 1400 Stevenson Drive Springfield, Illinois 62703 • 800-637-8606 • 217-529-6601 • Fax 217-529-6644 • [www.bunn.com](http://www.bunn.com)

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in inches. Bunn Corporation owns all copyrights relating to materials in this publication. Please contact Bunn Corporation to request permission to reproduce any portion of this publication.