Single TF DBC SST 120/208V w/Fnl Locks

35.7" x 19.2" x 12.1" (90.7cm x 48.8cm x 30.7cm)





- Brews 16.3 to 18.9gal (61.7 to 71.5L) of perfect coffee per hour
- Coffee extraction controlled with pre-infusion and pulse brew, digital temperature control, and large sprayhead; coffee strength controlled with variable by-pass.
- Create coffee recipe cards with custom recipes, ad cards with messages that display on the brewer LCD, and dedicated funnels for special coffees with the BrewWISE Recipe Writer using your PC (Windows® compatible).
- Easy pulse interface allows automatic programming of pulse routine
- Preventive maintenance kit: 39641.0000
- Stores individual coffee recipes so operator can easily brew many varieties
- ThermoFresh® servers are vacuum insulated to keep coffee hot for hours.
- Brews 1/2, 1 or 1 1/2gal (1.9, 3.8 or 5.7L) batches
- SplashGard® funnel deflects hot liquids away from the hand
- Energy saver mode reduces tank temperature during idle periods
- Operate any combination of BrewWISE equipment error-free with wireless brewer-grinder interface through Smart Funnel with SplashGard®
- Funnel locks help improve safety

Agency:

Faucet: Lower





Specifications

Product #: 34800.0003

Water Access: Plumbed

Interface: Wireless Finish: Stainless

Funnel: Smart Funnel

Additional Features

BUNNLINK Compatible

BrewWISE

Electrical & Capacity

Volts	Amps	Watts	Cord Attached Plug Type		8oz cups/hr 236ml cups/hr	Input H ² O Temp.	Phase	# Wires plus Ground	Hertz	
120/208	19.2	4000	No	-	187	60°F (15.5°C)	1	3	60	

Plumbing Requirements

PSI	kPa	Fitting Supplied	Water Flow Required (GPM)
20-90	138-621	3/8" Male Flare Fitting	-

CAD Drawings


2D	Revit	KLC
•		


Created on:

09/13/2017



BUNN® reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. For most current specifications and other info visit bunn.com.

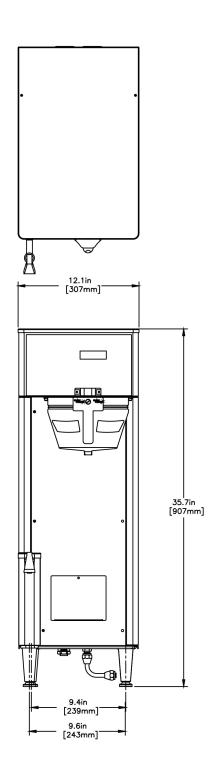

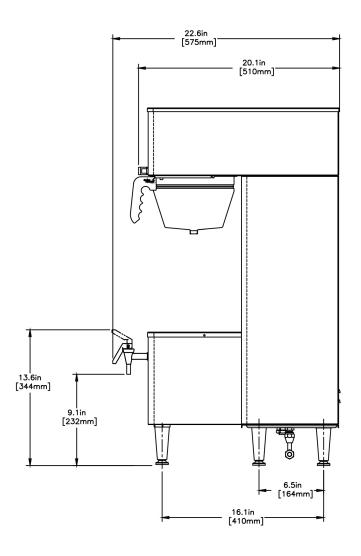

Unit				Shipping					
	Width	Height	Depth	Width	Height	Depth	Weight	Volume	
English	12.1 in.	35.7 in.	19.2 in.	-	-	-	58.850 lbs	8.131 ft ³	
Metric	30.7 cm	90.7 cm	48.8 cm	-	-	-	26.694 kgs	0.230 m³	




Related Products & Accessories: Single TF DBC SST 120/208V w/Fnl Locks(34800.0003)















Serving & Holding Options: Single TF DBC SST 120/208V w/Fnl Locks(34800.0003)



TF SERVER, DSG2 1G/3.8L

Product #:42700.0000



TERMO

Product #:42700.0000



TF SERVER, DSG2 1G/3.8L BLK

Product #:42700.0001



TF SERVER, DSG2 1G

Product #:42700.0003



TF SERVER, DSG2 1G BLK CD

Product #:42700.0004



TF SERVER, DSG2 1.5G SST

Product #:42750.0000



TF SERVER, DSG2 1.5G BLK

Product #:42750.0001



TERMO

Product #:42750.0001



TF SERVER, DSG2 1.5G

Product #:42750.0003



TF SERVER, DSG2 1.5G BLK CD

Product #:42750.0010



TF SERVER, 1G/3.8L MECH

Product #:44000.0000



TERMO

Product #:44000.0000



TF SERVER, 1G/3.8L MECH BLK

Product #:44000.0001



TERMO

Product #:44000.0001



TF SERVER, 1.5G/5.7L

Product #:44050.0000



TERMO

Product #:44050.0000



MECH BLK

Product #:44050.0001



TERMO

Product #:44050.0001