

Tiger Super Automatic Espresso Machine with Steam Wand

ITEM# _____

PROJECT _____

DATE _____



Model Tiger XL S Series

Dimensions: 25.5"H x 15.8"W x 18.1"D
(64.8 cm H x 40.1 cm W x 46 cm D)

Features

BUNN Espresso® Tiger XL S Series

- Up to 180 shots per hour from less than 16" of counter space.
 - Intelligent modular brewing chamber adjusts espresso for consistent flavor profile.
 - Simulates Barista tamping and polishing motion to provide uniform extraction.
 - Two hoppers for regular, decaf or other specialty beans.
 - Each hopper holds 1.75 lbs of fresh beans.
 - Adjusts for 4.5 to 7.38 inch cup clearance.
 - Pod brewing feature standard on all models.
 - Easy to use control pad and display screen guides user through steps for making drinks.
 - Simple daily cleaning process with automatic reminder and lockout.
 - Intellisteam™ wand shuts steam off when the milk reaches the preset temperature. No need to monitor temperature with a thermometer.
- **Capacity per Hour** (based on 6 oz cups, double shot of espresso)
- Espresso: 180
 - POD Products: 60
 - Hot Water: 7.9 gallons
 - Steam: 1-2 bar continuous operation

For current specification sheets and other information, go to www.bunn.com.

Related Products

Espresso Water Quality System

EQHP-ESP

Product No. :39000.0008



Replacement Cartridge

EQHP-ESPCRTG

Product No.: 39000.1008

Urnex® Cafiza™ Cleaning Tablets

Product No.: 36000.1189 (100 count)

Product No.: 36000.1188 (12/case)



Urnex® Rinza™

Milk Frother Cleaner

Product No.: 39265.0000 (each)

Product No.: 39265.0001 (6/case)



Cup Heater

Product No.: 35800.0400



Model

Tiger XL S-2

Agency Listing




Dimensions & Specifications

Model	Product #	Volts	Amps	Tank Heater Watts	Total Watts	Capacity	Cubic Measure	Shipping Weight	Cord Attached
Tiger XL S-2	35800.0006	120	16	1700	1850	180 shots/hr	12.5 ft ³	103 lbs	Yes
Tiger XL S-2	35800.0007	208	11.5	2000	2400	180 shots/hr	12.5 ft ³	103 lbs	Yes/ No Plug

Model includes: Machine, water filtration system, installation and 2-year preventative maintenance.

Electrical: Model requires 2-wire grounded service rated 120/208V, single phase, 50/60 Hz.

Plumbing: 20-100 psi (138 - 690 kPa). Machine supplied with 1/4" male flare fitting. All machines are supplied with a waste water hose and must be connected to a drain.

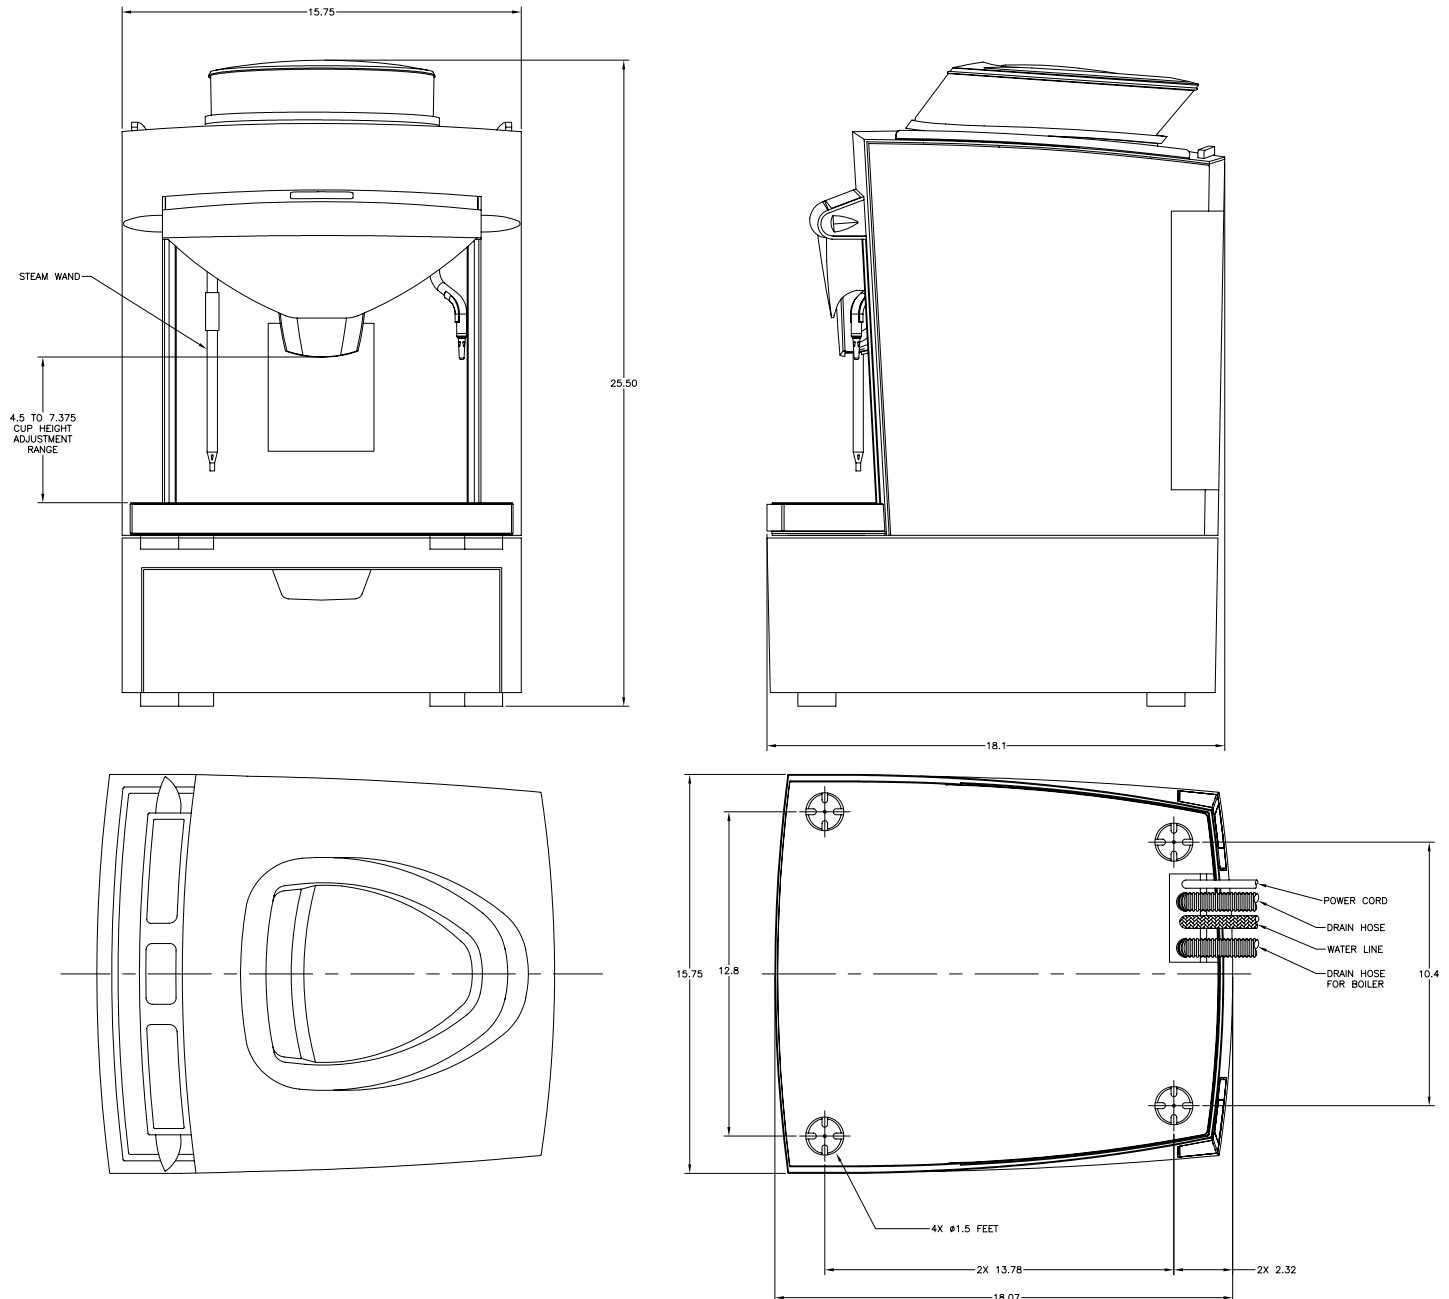

Bunn-O-Matic® Corporation - 1400 Stevenson Drive Springfield, Illinois 62703 • 800-637-8606 • 217-529-6601 • Fax 217-529-6644 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in inches.

9/07 © Bunn-O-Matic Corporation