

## Low Profile Liquid Coffee Ambient Dispenser with 2 heads

### Features

#### Low Profile Ambient Dispenser

- Attractive appearance with shorter profile.
- Dispense over 120 (5 oz.) cups per hour.
- Accommodates two .5 gallon bag-in-box (BIB).
- Serves two coffee products and hot water.
- Refill LED lights alert the operator when more concentrate is needed.
- Rinse LED lights alert the operator cleaning is needed.
- Set up for continuous dispense (by the cup) for self-serve applications or portion-control to fill cups or carafes.
- Sanitation listed by ETL to NSF Standard 18 and safety listed by ETL to UL Standard (UL 197) and CSA Standard.



#### Model LCA-2 LP

Dimensions: 23.2" H x 15.78" W x 20.9" D  
(58.9cm H x 40.1cm W x 53cm D)

For current specification sheets and other information, go to [www.bunn.com](http://www.bunn.com).

### Related Products

#### Easy Clear® EQ-11-TL

Product No. : 30344.1001

Dimensions:


15<sup>7</sup>/<sub>8</sub>" H x 3<sup>5</sup>/<sub>8</sub>" W x 4<sup>17</sup>/<sub>32</sub>" D

Use with 1.8 oz/sec. flow rate.



#### 1/8" Replacement tube kits

Product No. : 37942.1000



#### Drip Tray Drain Kit


Product No.: 37309.0000

#### 50ml Graduated Cylinder Kit

Product No. : 34843.1000

For use in calibration of pumps.



Model	Agency Listing
LCA-2, LP	


## Dimensions & Specifications

Model	Product Number	Dispense Rate 1.7 oz.	Connector Type	Volts	Amps	Heater Watts	Total Watts	Capacity*	Cubic Measure	Shipping Weight	Cord Attached
<b>Product Ratios</b>											
LCA-2, LP	38800.0000	25:1 - 100:1	Scholle 1910LX	120	12	1425	1440	120 cups/hr.	10.9 ft <sup>3</sup>	65 lbs.	Yes
LCA-2, LP	38800.0001	25:1 - 100:1	QCDII	120	12	1425	1440	120 cups/hr.	10.9 ft <sup>3</sup>	65 lbs.	Yes
LCA-2, LP	38800.0002	25:1 - 100:1	Scholle Q/C	120	12	1425	1440	120 cups/hr.	10.9 ft <sup>3</sup>	65 lbs.	Yes
LCA-2, LP	38800.0003	25:1 - 100:1	Rapak	120	12	1425	1440	120 cups/hr.	10.9 ft <sup>3</sup>	65 lbs.	Yes

\*Capacity measured with a 5 oz. cup.

Electrical: 120V model requires 2-wires plus ground service rated 120V, single phase, 60 hz.

Plumbing: 20-90 psi (138-621 kPa) from a 1/4" (6.35 mm) or larger supply line. Unit requires a 1 gpm line flow capacity. A shut-off valve should be installed in the line before the unit. Install a regulator in line when pressure is greater than 90 psi to reduce pressure to 50 psi. Supplied with 1/4" (6.35 mm) male flare fitting.

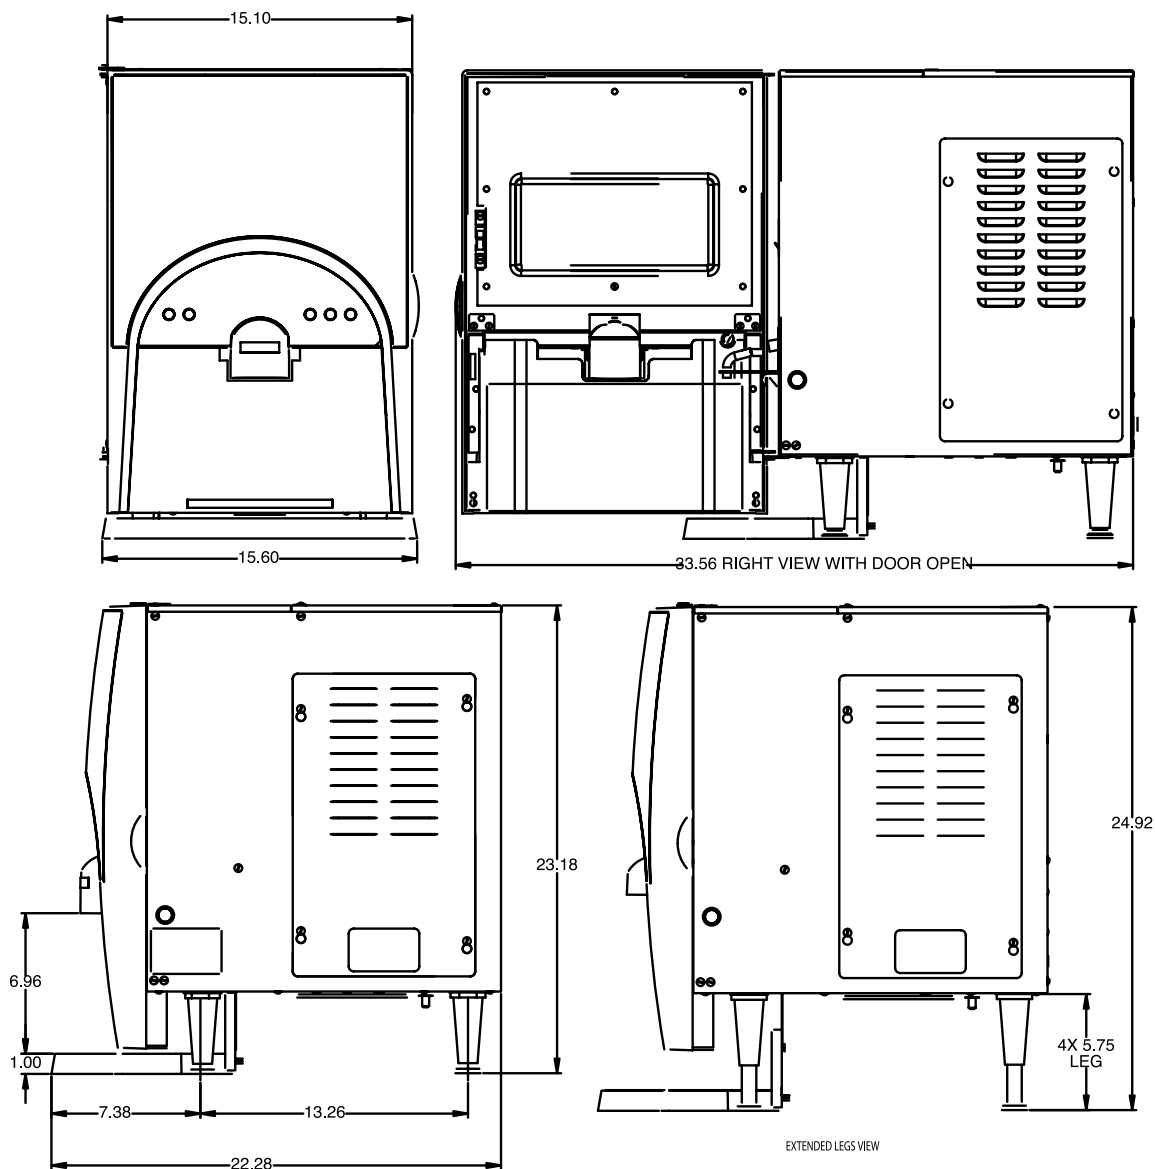

BUNN Corporation - 1400 Stevenson Drive Springfield, Illinois 62703 • 800-637-8606 • 217-529-6601 • Fax 217-529-6644 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in inches. Bunn Corporation owns all copyrights relating to materials in this publication. Please contact Bunn Corporation to request permission to reproduce any portion of this publication.