SCALE-PRO

10.3" x 2.8" x 2.8" (26.2cm x 7.1cm x 7.1cm)



- System maximum operating pressure is 125 psi (862 kPa) and operating temperature 100°F (38°C)
- 3/4" NPT stainless steel connections easily adapt to most plumbing systems. (Kit 39000.0101 available with bushings to reduce to 3/8" and 1/4" NPT)
- FDA-CFR and NSF compliant materials
- Engineered force feeding orifice accurately controls feed rate without overdosing
- Reduces lime scale formation from hard water in applications where water is either heated or evaporated
- Recommended for use in combination with an EQHP10, 25, 54 (non-L) system
- · Suggested cartridge change-out is every 6 months
- Working flow rate of 6gpm (22Lpm) accommodates most high temperature foodservice equipment
- Proprietary scale inhibitor does not break down at temperatures above 200°F (93.3°C)
- System extends the life and increases the efficiency of coffee brewers, espresso machines and steamers

Agency:

Specifications

Product #: 39000.0010

Cartridge Type: Quick Change

Additional Features


Capacity


Service Flow Rate	Capacity	Micron Rating
6.0 gal/min (22.7 L/min)		-

Plumbing Requirements

Max Operating	Max Operating	Inlet	Outlet	
Pressure	Temperature	Connection	Connection	
125 psi (862 kPa)	100°F(38°C)	3/4 IN NPT	3/4 IN NPT	



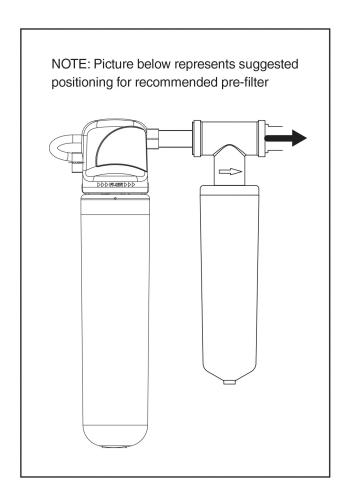

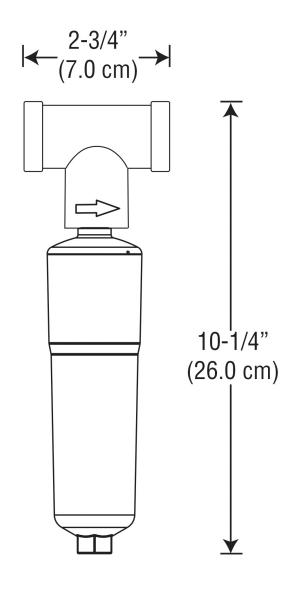

Scale-Pro

Unit			Shipping					
	Width	Height	Depth	Width	Height	Depth	Weight	Volume
English	2.8 in.	10.3 in.	2.8 in.	-	-	-	2.150 lbs	-
Metric	7.1 cm	26.2 cm	7.1 cm	-	-	-	0.975 kgs	-



Related Products & Accessories: SCALE-PRO(39000.0010)









