




APPLICATION: Designed for large volume usage of steaming hot water. Up to 100 cups of 190° hot water per hour are provided by the system's 1/2 gallon tank. Saves time, work and water — you only heat the water you use.

MODEL H-778 Hot Water Dispenser

FEATURES

- 1-year full warranty on parts and labor
- System provides up to 100 cups of 190°F water per hour
- Chrome-plated faucet completely insulated from 190° water.
- Die-molded, high efficiency, expanded polystyrene thermal barrier surrounds tank for low heat loss.
- Adjustable thermostat, convenient drain, thermally fused to prevent tank damage from dry start-up or loss of water.
- Tank is always open to atmospheric pressure and requires no relief valves.
- Spout is elevated to fill large containers.
- Stainless steel case.
- Mounts in standard sink opening or 1-1/4" drilled hole.

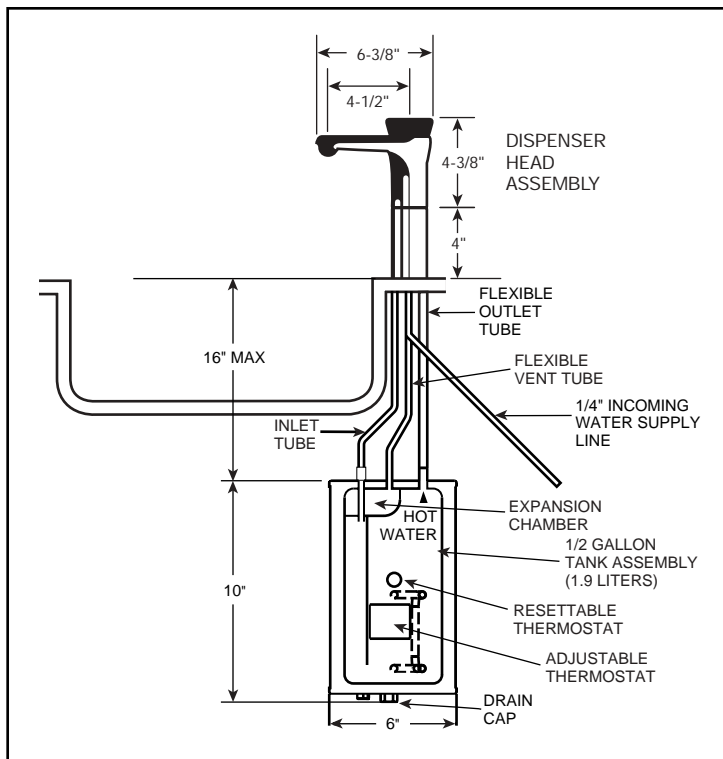

SPECIFICATIONS

Capacity	1/2 gallon, up to 100 cups of 190°F water per hour
Electrical	1300 watts, 11.3 amps, 115 volts A.C. U.L. listed — 3-wire cord and 3-prong plug provided.
Thermostat	Snap-action, adjustable from 140°F to 200°F (factory pre-set at 190°F).
Insulation	Meets U.L. 94HF-1 flammability specification
Valve	Instant, self-closing.
Shipping wt.	9 lbs.

SAMPLE SPECIFICATIONS

Hot Water Dispenser(s) shall be In-Sink-Erator Model H-778 1/2-gallon capacity insulated tank with drain plug, 1300 watt heater, instant self-closing valve, adjustable thermostat, 1-year full warranty on parts and labor.*

* Complete In-Sink-Erator and all parts covered is included in the Care and Use Booklet, packed with each unit.

