



PROJECT	
ITEM #	
QUANTITY	DATE
APPROVAL	

4560N

Front-Breathing Flat Top and Undercounter Freezer Bases

Short Form Specifications

Exterior top is one-piece, 22-gauge stainless steel with integral 2.12" (5.1cm) square nosing at the front.

Exterior back and bottom is two-piece 24-gauge galvanized steel. Exterior ends are stainless steel.

Interior sides are thermoformed ABS plastic with shelf supports. Base is fully insulated with high-density foamed in place polyurethane.

Refrigeration system uses HFC-404A refrigerant. Compressor is 1/3+ H.P., with condenser coil and condensate evaporator mounted on rear of the cabinet. Evaporator coils and temperature control are located on the interior rear wall of the cabinet. Refrigerant flow is controlled by a expansion valve. Cabinet maintains an interior cabinet temperature of -5°F to 0°F (-21°C to -18°C).

Electrical connections are 115 volt, 60 Hertz, single phase. Unit has an 8' (2.4m) long electrical cord and NEMA 5-15P plug.

Casters: Equipment is mounted on 2" (5.08cm) diameter casters, with front three locking. Equipment clearance above the floor is 2.5" (6.35cm).




Model UC4560N

Optional Accessories and Modifications


- 18" wide single tier overshelf
- Stainless steel finish on back
- Plastic laminate on front
- Additional wire shelves
- Door lock
- *220V/50 Hertz electrical system
- *Inclusion of this option will alter electrical specifications of the unit.




Front-Breathing Flat Top and Undercounter Freezer Bases

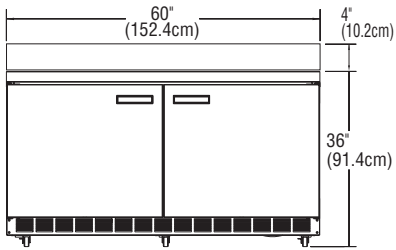


**ELEVATION VIEW
ST4560N**

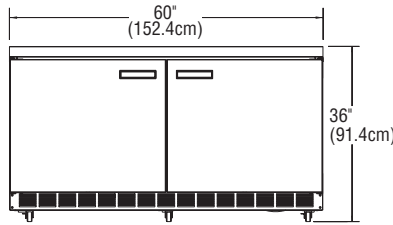


**ELEVATION VIEW
4560N**

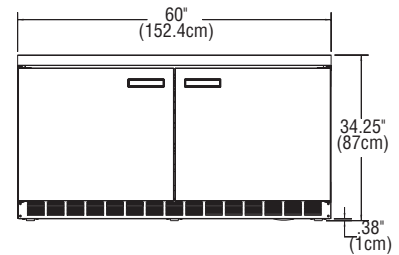


**ELEVATION VIEW
UC4560N**




**END VIEW
ST4560N**



**END VIEW
4560N**



**END VIEW
UC4560N**

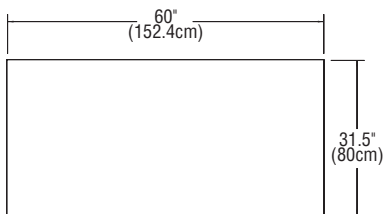

**PLAN VIEW
ALL MODELS**

DOOR CLEARANCE
IS 30" (76.2CM) PAST
THE NOSING WHEN
DOOR IS FULLY
EXTENDED

INSTALLATION NOTE:
Refrigeration system is designed so that air will flow
under the unit, through the compressor area and out the
front of the unit. Any restriction to this air flow path will
void the warranties.

NOTE: UC Models are shipped with an alternate caster kit, reducing
the overall height to 34.25" (87cm)

Mechanical Data—Standard Unit

MODEL NUMBER	#OF SHELVES	SHELF AREA. SQ. FT.	STORAGE CAP. CU. FT.	H.P.	VOLTS/HERTZ/ PHASE	AMPS	NEMA PLUG	SHIP WEIGHT
4560N	2	7.36	15.7	1/3+	115/60/1	12.0	5-15P	340 lbs/ 154 kg
ST4560N	2	7.36	15.7	1/3+	115/60/1	12.0	5-15P	340 lbs/ 154 kg
UC4560N	2	7.36	15.7	1/3+	115/60/1	12.0	5-15P	340 lbs/ 154 kg