



CTP-NB


Countertop Refrigerated Prep Rail

Project _____
 Item _____
 Quantity _____
 CSI Section 11400
 Approved _____
 Date _____

CTP-NB: Countertop Refrigerated Prep Rail

Models

- CTP 8146-NB 46" countertop refrigerated prep rail, (4) 1/3 pan capacity
- CTP 8160-NB 60" countertop refrigerated prep rail, (6) 1/3 pan capacity

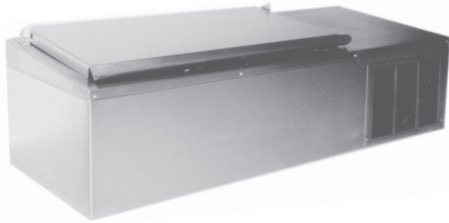

CTP8146-NB

Standard Features

- Stainless steel top and interior
- Environmentally friendly HFC-134A refrigerant
- High density foamed in place environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane keeps energy costs low
- Mechanically cooled rail with integral V-stamped pan rest
- NSF7 certified
- One year parts and 90 day labor standard warranty

Options & Accessories

- 230 volt, 50 Hertz electrical system
- * *Inclusion of this option will alter electrical specifications of the unit*

Specifications


Exterior Top and Sides are 18-gauge stainless steel. Back of unit is 18-gauge galvanized steel. Unit has a mechanically cooled refrigerated raised rail with die-stamped opening(s) to accommodate 12" x 20" (30.5cm x 50.8cm) hotel pans, by others. Adapter bars supplied with unit. Pans are recessed 2" (5.1cm) from the top and rest on integral V-stamped supports. Raised rail openings have 18-gauge stainless steel hinged removable covers.

Unit Interior has a 22-gauge stainless steel liner with foamed-in-place environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane insulation.

Base of unit has removable louvers at front and rear for proper air flow and access to the condensing unit. Protective rubber bumpers affixed to the back of the unit allow proper air flow

Refrigeration System uses HFC-134a refrigerant. Refrigerated rail is designed to maintain 41°F (5°C) at 86°F ambient for up to (4) hours. Food and product should be placed in unit at 37°F (3°C). On/off switch is located at the right end of the unit.

Electrical Connection is 115 volt, 60 Hertz, single phase. Unit is wired with a 3-wire, grounded and has a 8' (2.4 m) long electrical cord and NEMA 5-15P plug.



980 S. Isabella Rd.
 Mt. Pleasant, Michigan 48858

Phone: 800-733-8948 or 989-773-7981
 Fax: 800-669-0619


www.delfield.com





CTP-NB

Countertop Refrigerated Prep Rail

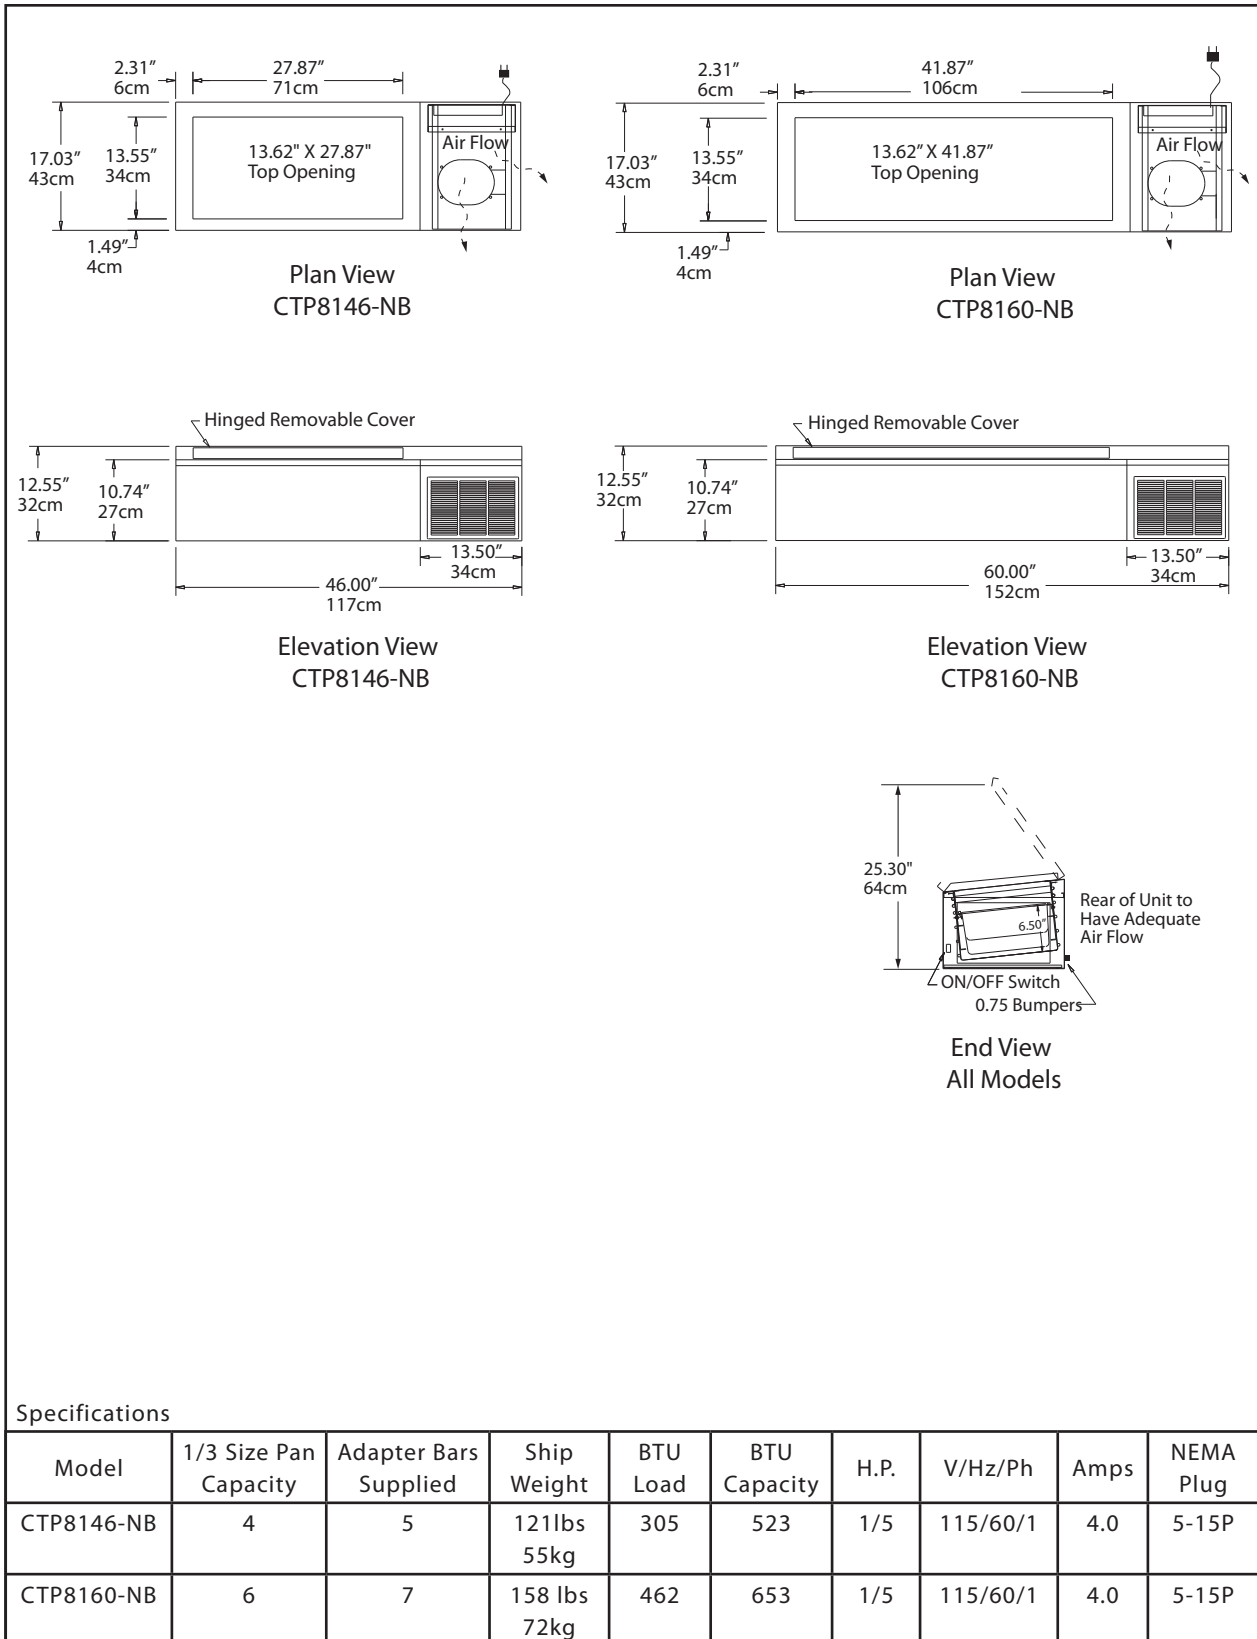

Delfield reserves the right to make changes to the design or specifications without prior notice.

980 S. Isabella Rd.
Mt. Pleasant, Michigan 48858

Phone: 800-733-8948 or 989-773-7981
Fax: 800-669-0619
www.delfield.com

Printed in the U.S.A.
DSCTPNB
05/12

