



# F2900VD

Versa Drawer™ Equipment Stand

Project \_\_\_\_\_  
 Item \_\_\_\_\_  
 Quantity \_\_\_\_\_  
 CSI Section 11400  
 Approved \_\_\_\_\_  
 Date \_\_\_\_\_

## Models

- F2984VDL 84" Versa Drawer with (2) 32" drawers and compressor on the left
- F2984VDR 84" Versa Drawer with (2) 32" drawers and compressor on the right



F2984VDL

## Standard Features

- 4 temperature operation-each drawer is completely independent and can operate as a refrigerator, freezer, chiller or thaw cabinet at any time
- Easy to use microprocessor control with push button function selection
- HACCP electronic record keeping, alarm notifications, and service diagnostics
- Heavy-gauge stainless steel top
- Standard on 6" casters
- Mechanical access on compressor end of unit
- 32" heavy duty full extension drawers with (2) 12"x20" pan capacity per drawer
- NSF 7 certified
- High density polyurethane foam throughout
- Dart style quick change gaskets
- 8' long electrical cord
- Environmentally friendly HFC-404A refrigerant
- One year parts, one year labor and 5 year compressor warranty

## Options & Accessories

- 6" legs

## Specifications

**Exterior Top:** Constructed of one-piece heavy-gauge stainless steel with integral 2.12" (5.4cm) high square nosing at front and full perimeter marine edge.

**Exterior Sides, Back and Bottom:** heavy-gauge stainless steel sides with removable stainless steel mechanical access panel on compressor end. Back and bottom are constructed of galvanized steel.

**Interior:** Interior of each drawer section is a polyethylene rotocast liner with ABS drawer front liners


**Drawers:** Heavy-gauge stainless steel exterior front, with a thermoformed ABS plastic interior liner. Frame and tracks are constructed of 11 and 12-gauge stainless steel. Roller track assemblies have self-lubricating Delrin™ rollers.

**Refrigeration System:** Environmentally friendly HFC-404A refrigerant. Each independent drawer has its own evaporator coil with expansion valve. Digital control acts as thermometer, thermostat and diagnostic center for each drawer. Hot gas defrost system is also utilized during thaw operation.


**Electrical Connections:** 115 volt, 60 Hertz, single phase. Unit is wired with 3-wire, grounded, maximum 8' (2.4m) cord and plug.




F2900VD: VERSA DRAWER™ EQUIPMENT STAND

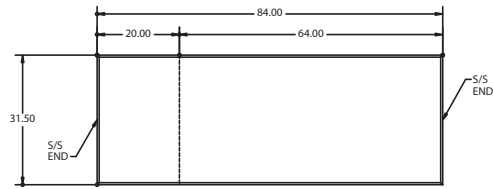


Plan View




Side View

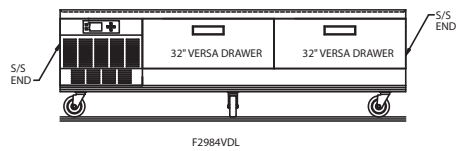


Elevation View

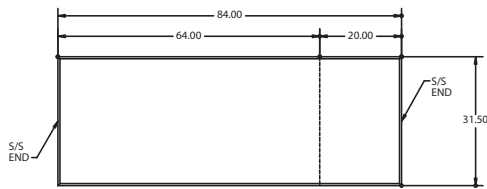

Plan View

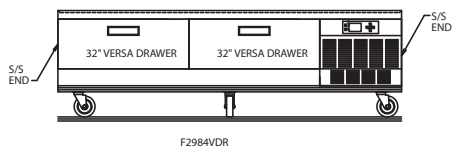

Elevation View



Side View

**Specifications**

Model Number	Overall			32" Drawers	12"x20" Pans	H.P.	Voltage	Amps	Nema Plug	Ship Weight	Energy Consumption kwh
	L	D	H								
F2984VDL	84"	31.5"	26"	2	4	1/3	115	6.0	5-15	520	1.50*/4.01**
F2984VDR	84"	31.5"	26"	2	4	1/3	115	6.0	5-15	520	1.50*/4.01**

\*All drawers refrigerators.

\*\* All drawers freezers.