



PROJECT _____
 ITEM NUMBER _____
 QUANTITY _____ DATE _____
 APPROVAL _____

N8700N

Narrow Drop-In Individually Controlled Electric Food Wells

Short Form Specifications


Top shall be one-piece 18-gauge stainless steel, with 0.63" overhang around perimeter and die stamped 19.87" x 11.87" (50.5 cm x 30.2 cm) openings with depressed edges. Formed well below each opening shall be 6.25" (15.9 cm) deep. Each well shall have an individual infinite control and 1000 watt heating element attached to bottom of well. Exterior housing shall be 20-gauge galvanized steel. Unit shall be insulated on sides and between wells with 1.00" (2.5 cm) fiberglass; bottom shall have 1.00" (2.54 cm) blanket insulation.

Unit shall have all individual controls wired to a control panel for mounting in counter or at a remote location; 4' (1.2 m) length of wiring and conduit are provided. Unit shall have a three-wire electrical junction box to allow hard-wiring at installation.


Optional Accessories & Modifications

- Adapter plates and bars
- Single or double service flip-up sneezeguards
- Telescoping covers
- Drains and manifold


*Inclusion of this option will alter the electrical specifications of the unit.

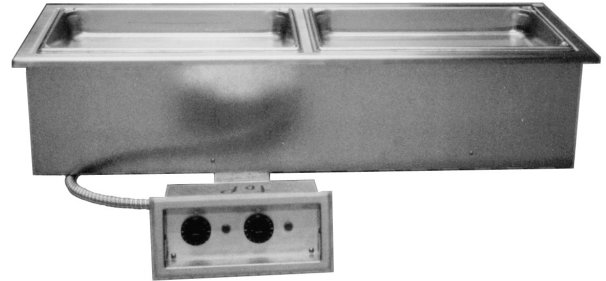


Model N8746N
(Pans by others)

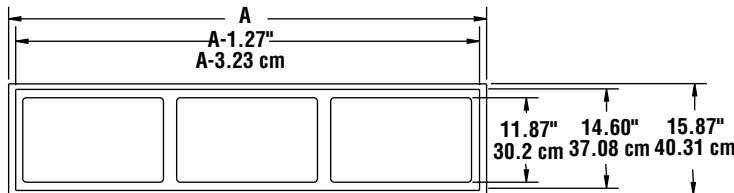


TYPICAL PLAN VIEW



TYPICAL ELEVATION VIEW



TYPICAL END VIEW

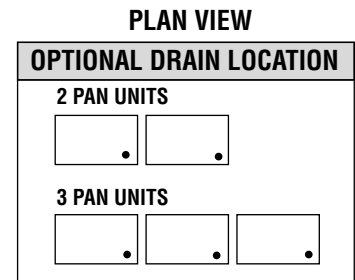

Mechanical Data: Standard Unit

MODEL NUMBER	A	COUNTER CUTOUT DIMENSIONS (DXL)	CONTROL PANEL CUTOUT DIMENSIONS	# OF FOOD WELLS	VOLTAGE HERTZ/PHASE	AMPS	SHIPPING WEIGHT
N8746N	45.61" 116 cm	15" X 44.61" 38.1 cm X 113.3 cm	4.62" X 10.31" 11.7 cm x 26.19 cm	2	120/60/1	17	100 lbs 46 kg
N8768N	67.48" 172 cm	15" X 66.48" 38.1 cm X 169 cm	4.62" x 14.50" 11.7 cm x 36.83 cm	3	208-230/60/1	16	130 lbs 59 kg