



|          |      |
|----------|------|
| PROJECT  |      |
| ITEM #   |      |
| QUANTITY | DATE |
| APPROVAL |      |

## ST4460N/STD4460N/UC4460N/UCD4460N

### Front-Breathing Flat Top and Undercounter Refrigerated Bases

#### Short Form Specifications

**Exterior top** is one-piece, 22-gauge stainless steel with integral 2.12" (5.1cm) square nosing at the front.

**Exterior back and bottom** is two-piece 24-gauge galvanized steel. Exterior ends are stainless steel.

**Interior sides** are thermoformed ABS plastic with integral shelf supports. Base is fully insulated with high-density foamed in place polyurethane.

**Refrigeration system** uses HFC-404A refrigerant. Compressor is 1/2 H.P., with condenser coil and condensate evaporator mounted on rear of the cabinet. Evaporator coils and temperature control are located on the interior rear wall of the cabinet. Refrigerant flow is controlled by a capillary tube. Cabinet maintains an interior cabinet temperature of 36°F to 40°F (2°C to 4°C).

**Electrical connections** are 115 volt, 60 Hertz, single phase. Unit has an 8' (2.4m) long electrical cord and NEMA 5-15P plug.

**Casters:** Equipment is mounted on 2" (5.08cm) diameter casters, with front three locking. Equipment clearance above the floor is 2.5" (6.35cm).

#### The following applies to two door models only

**Doors** have a 22-gauge stainless steel exterior, with thermoformed ABS plastic interior liner. Cabinet is supplied with one adjustable epoxy-coated wire shelf per door opening.

#### The following applies to four drawer models only

**Drawer** fronts have a 22-gauge stainless steel exterior, with thermoformed ABS plastic interior liner. Drawer frames are 14-gauge stainless steel. Drawer slides are 14-gauge stainless steel, with stainless steel bearings. Top drawer will hold one 12" x 20" (30.5cm x 50.8cm) pan 4"-6" (10.1cm-15.2cm) deep. Bottom drawer holds one 4" (10.1cm) deep full size pan. Pans are supplied by others.

#### Optional Accessories and Modifications

- 18" wide single tier overshelf
  - Stainless steel finish on back
  - Plastic laminate on front
  - Additional wire shelves
  - Door lock
  - 36" height available for UC
  - \*220V/50 Hertz electrical system
- \*Inclusion of this option will alter electrical specifications of the unit.




Model UC4460N






# ST4460N/STD4460N/UC4460N/UCD4460N


## Front-Breathing Flat Top and Undercounter Refrigerated Bases

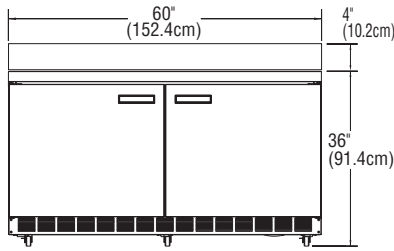


**ELEVATION VIEW  
ST4460N**

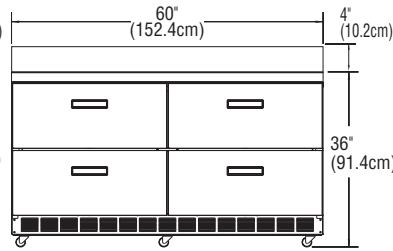


**ELEVATION VIEW  
STD4460N**




**END VIEW  
ST4460N**

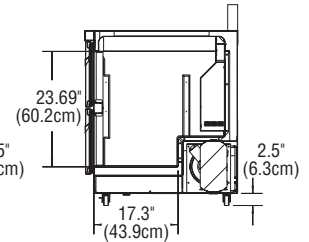


**END VIEW  
STD4460N**

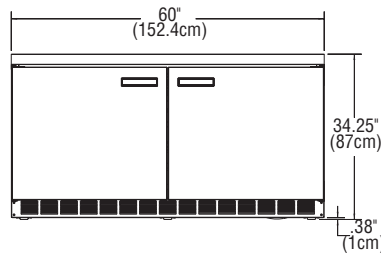


**ELEVATION VIEW  
UC4460N**

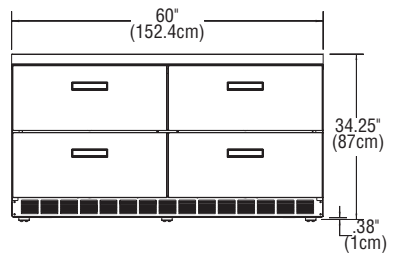


**ELEVATION VIEW  
UCD4460N**




**END VIEW  
UC4460N**



**END VIEW  
UCD4460N**

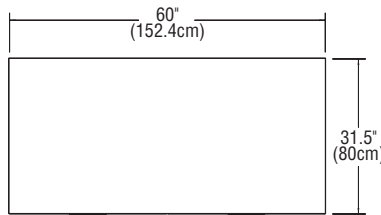

**PLAN VIEW  
ALL MODELS**



**DOOR CLEARANCE  
DETAIL**

**INSTALLATION NOTE:**  
Refrigeration system is designed so that air will flow under the unit, through the compressor area and out the front of the unit. Any restriction to this air flow path will void the warranties.

**NOTE:** UC Models are shipped with an alternate caster kit, reducing the overall height to 34.25" (87cm)

### Mechanical Data—Standard Unit

| MODEL NUMBER    | #OF SHELVES | SHELF AREA. SQ. FT. | STORAGE CAP. CU. FT. | H.P. | VOLTS/HERTZ/ PHASE | AMPS | NEMA PLUG | SHIP WEIGHT     |
|-----------------|-------------|---------------------|----------------------|------|--------------------|------|-----------|-----------------|
| <b>ST4460N</b>  | 2           | 7.36                | 15.7                 | 1/2  | 115/60/1           | 12.0 | 5-15P     | 340 lbs/ 154 kg |
| <b>STD4460N</b> | NA          | NA                  | 2.7                  | 1/2  | 115/60/1           | 12.0 | 5-15P     | 375 lbs/ 170 kg |
| <b>UC4460N</b>  | 2           | 7.36                | 15.7                 | 1/2  | 115/60/1           | 12.0 | 5-15P     | 340 lbs/ 154 kg |
| <b>UCD4460N</b> | NA          | NA                  | 2.7                  | 1/2  | 115/60/1           | 12.0 | 5-15P     | 375 lbs/ 170 kg |