



## GLO-RAY® DESIGNER INFRARED FOODWARMERS

Models GR2A-18, -24, -30, -36, -42, -48, -54, -60, -66, -72, -84 GR2AH-18, -24, -30, -36, -42, -48, -54, -60, -66, -72, -84  
GR2A-18D, -24D, -30D, -36D, -42D, -48D, -54D, -60D, -66D, -72D, -84D GR2AH-18D, -24D, -30D, -36D, -42D, -48D, -54D, -60D, -66D, -72D, -84D

Hatco Glo-Ray® Designer Infrared Foodwarmers safely keep all hot foods at optimum serving temperatures longer. Foods do not dry out or become discolored; even delicate dishes hold that "just-prepared" look. The Glo-Ray pre-focused heat pattern directs heat from a tubular element to bathe the entire holding surface.

### FLEXIBILITY

The continuous aluminum housings, up to 88" (2235 mm) in width, are very strong and eliminate the danger of sagging.

Optional sneeze guards, made of shatterproof, easy-to-clean acrylic, are available, providing a safe environment for the food. Check NSF standards and local codes for requirements.

Many combinations of remote control enclosures are available in several sizes, built in accordance with UL Standards to accommodate power switches, infinite controls, indicator lights, and wiring. **Remote control installation is required on all Designer foodwarmers.**

Designer color foodwarmer and inset panels allow the unit to match the surrounding décor. The powdercoated surfaces provide durability and are easy to clean.

### QUALITY

The following features assure the finest performance for years to come:


- Available in widths from 22" to 88" (559-2235 mm).
- Sturdy continuous aluminum housings eliminate sagging.
- Pre-focused heat maintains safe serving temperatures longer without continuing to cook the food.
- Variety of models, configurations, colors and accessories provide unlimited flexibility.



Model GR2AH-24



Model GR2AH-24D with optional sneeze guards

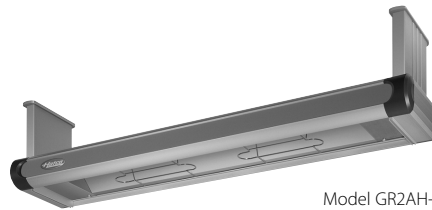

Model GR2AH-36 with Designer legs for hanging installations

### Remote Control Enclosures



Model RMB-14D with infinite controls



Model RMB-7C with infinite controls



**HATCO CORPORATION P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.**  
**(800) 558-0607 • (414) 671-6350 • Fax (800) 543-7521 • Int'l. Fax (414) 671-3976**  
**www.hatcocorp.com • E-mail: equipsales@hatcocorp.com**

Form No. GR2A Spec Sheet


Printed in U.S.A.  
April 2009

METAL SHEATHED ELEMENTS GUARANTEED AGAINST BURNOUT AND BREAKAGE FOR TWO YEAR.



# GLO-RAY® DESIGNER INFRARED FOODWARMERS

Models GR2A-18, -24, -30, -36, -42, -48, -54, -60, -66, -72, -84 GR2AH-18, -24, -30, -36, -42, -48, -54, -60, -66, -72, -84  
GR2A-18D, -24D, -30D, -36D, -42D, -48D, -54D, -60D, -66D, -72D, -84D GR2AH-18D, -24D, -30D, -36D, -42D, -48D, -54D, -60D, -66D, -72D, -84D

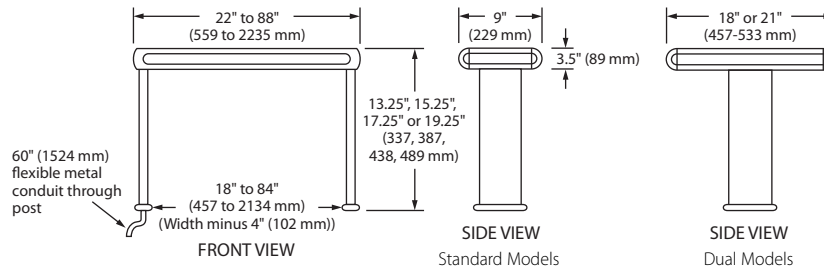

## SPECIFICATIONS

High Watt		Standard Watt			
Model*	Watt	Model	Watt	Width	Shipping Weight*
GR2AH-18	350	GR2A-18	250	22" ( 559 mm)	28 lbs. (12 kg)
GR2AH-24	500	GR2A-24	350	28" ( 711 mm)	32 lbs. (15 kg)
GR2AH-30	660	GR2A-30	450	34" ( 864 mm)	35 lbs. (16 kg)
GR2AH-36	800	GR2A-36	575	40" (1016 mm)	37 lbs. (17 kg)
GR2AH-42	950	GR2A-42	675	46" (1168 mm)	53 lbs. (25 kg)
GR2AH-48	1100	GR2A-48	800	52" (1321 mm)	64 lbs. (29 kg)
GR2AH-54	1250	GR2A-54	925	58" (1473 mm)	74 lbs. (34 kg)
GR2AH-60	1400	GR2A-60	1050	64" (1626 mm)	82 lbs. (37 kg)
GR2AH-66▼	1560	GR2A-66	1160	70" (1778 mm)	91 lbs. (41 kg)
GR2AH-72▼	1725	GR2A-72	1275	76" (1930 mm)	100 lbs. (45 kg)
GR2AH-84▲	2050	GR2A-84▼	1500	88" (2235 mm)	120 lbs. (54 kg)

High Watt Dual		Standard Watt Dual			
Model*	Watt	Model	Watt	Width	Shipping Weight*
GR2AH-18D	700	GR2A-18D	500	22" ( 559 mm)	44 lbs. (20 kg)
GR2AH-24D	1000	GR2A-24D	700	28" ( 711 mm)	48 lbs. (22 kg)
GR2AH-30D	1320	GR2A-30D	900	34" ( 864 mm)	52 lbs. (24 kg)
GR2AH-36D	1600	GR2A-36D	1150	40" (1016 mm)	57 lbs. (26 kg)
GR2AH-42D	1900	GR2A-42D	1350	46" (1168 mm)	66 lbs. (30 kg)
GR2AH-48D	2200	GR2A-48D	1600	52" (1321 mm)	77 lbs. (35 kg)
GR2AH-54D	2500	GR2A-54D	1850	58" (1473 mm)	88 lbs. (40 kg)
GR2AH-60D	2800	GR2A-60D	2100	64" (1626 mm)	97 lbs. (44 kg)
GR2AH-66D■	3120	GR2A-66D	2320	70" (1778 mm)	107 lbs. (49 kg)
GR2AH-72D■	3450	GR2A-72D	2550	76" (1930 mm)	117 lbs. (53 kg)
GR2AH-84D★	4100	GR2A-84D■	3000	88" (2235 mm)	138 lbs. (63 kg)

- \* When no color is specified, color inset panels and corner caps will be black.
- Does not include RMB. ▼ When using an infinite control with 120 volt model, tandem elements are required, cord not available.
- ▲ 120 volt models require additional switches and tandem (end-to-end) elements.
- 120 volt models with infinite controls not available. ★ 120 volt models not available.

## OPTIONS (NOT FOR RETROFIT)

- Unit and Inset Panel *Designer* Colors: Warm Red, Black, Gray Granite, White Granite, Navy Blue, Hunter Green, Antique Copper
- Dark Gray *Designer* Corner Caps (Black is standard)

## DIMENSIONS

GR2A & GR2AH: 22"-88"W x 9"D x 3.5"H without legs  
(559-2235 x 229 x 89 mm).

GR2A-XXD & GR2AH-XXD: 22"-88"W x 18" or 21"D x 3.5"H  
without legs (559-2235 x 457 or 533 x 89 mm).

## VOLTAGE

120, 208 and 240 volts, single phase.  
Export voltages available.

## REMOTE CONTROL ENCLOSURES

Model	Width	Toggle Switches
RMB-3	5.5" (140 mm)	2 Maximum
RMB-7	9" (229 mm)	4 Maximum
RMB-14	14" (356 mm)	6 Maximum
RMB-16	16" (406 mm)	3 Maximum
RMB-20	20" (508 mm)	3 Maximum

**NOTE: ONE CONTROL BOX PER FOODWARMER.**

## MOUNTING REQUIREMENTS

Recommended Mounting Height –  
Single Infrared Foodwarmer Models  
Standard Watt: 10"-12" (254-305 mm)  
High Watt: 12"-14" (305-356 mm)  
Dual Infrared Foodwarmer Models  
Standard Watt: 10"-14" (254-356 mm)  
High Watt: 14"-16" (356-406 mm)

## MINIMUM SPACING –

May not be installed in combustible surroundings.  
Must be installed no closer than 6" (152 mm) from a non-combustible back wall and above a non-combustible surface.

- Sneeze Guards – 7.5" or 14" (191 or 356 mm)
- Designer* Non-Adjustable Stands 10", 12", 16" (254, 305, 406 mm)  
Height in lieu of Standard 14" (356 mm) Stands
- 4" (102 mm) *Designer* Overhead Mounts

## PRODUCT SPECS

### Designer Infrared Foodwarmer

The *Designer* Infrared Foodwarmer shall be a Glo-Ray®, manufactured by the Hatco Corporation, Milwaukee, WI 53234 U.S.A.

With 24/7 service (U.S. and Canada only), the Foodwarmer shall be a Glo-Ray Model ..., rated at ... watts, ... volts, single phase and be ... inches (millimeters) in overall width.

The Glo-Ray shall consist of an aluminum housing and include as standard equipment 14" (356 mm) *Designer* legs.

The infrared heating element shall be tubular metal sheathed. The foodwarmer shall be factory assembled ready for electrical installation. Options shall include *Designer* non-adjustable tubular legs in various sizes, hanger legs, dark gray *Designer* corner caps, sneeze guards, and remote control enclosure.

HATCO CORPORATION P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. • (800) 558-0607 • (414) 671-6350  
Fax (800) 543-7521 • Int'l. Fax (414) 671-3976 • www.hatcocorp.com • E-mail: equipsales@hatcocorp.com