



GLO-RAY® DESIGNER INFRARED FOODWARMERS

Models GR2A-18, -24, -30, -36, -42, -48, -54, -60, -66, -72, -84 GR2AH-18, -24, -30, -36, -42, -48, -54, -60, -66, -72, -84
GR2A-18D, -24D, -30D, -36D, -42D, -48D, -54D, -60D, -66D, -72D, -84D GR2AH-18D, -24D, -30D, -36D, -42D, -48D, -54D, -60D, -66D, -72D, -84D

Hatco Glo-Ray *Designer* Infrared Foodwarmers safely keep all hot foods at optimum serving temperatures longer. Foods do not dry out or become discolored; even delicate dishes hold that "just-prepared" look. The Glo-Ray pre-focused heat pattern directs heat from a tubular element to bathe the entire holding surface.

FLEXIBILITY

The continuous aluminum housings, up to 88" (2235 mm) in width, are very strong and eliminate the danger of sagging.

Optional breath protectors that meet NSF standards can be ordered for display areas and buffet lines. Made of shatterproof, easy-to-clean acrylic, they provide a safe food-serving environment.

The advanced Glo-Ray Dual Mounting feature allows side-by-side mounting of two warmers to provide a deeper holding area. A 3" or 6" (76 or 152 mm) spacer is available, as well as shatter-resistant incandescent lights that illuminate the warming area.

Remote control installation is mandatory on all Designer foodwarmers.

Remote control enclosures are available in several sizes, built in accordance with UL standards to accommodate switches, indicator lights and wiring, ready for installation.

Designer color food warmer and inset panels allow the unit to match the surrounding décor. The powdercoated surfaces provide durability and are easy to clean.

QUALITY

The following features assure the finest performance for years to come:

- Available in widths from 22" to 88" (559-2235 mm).
- Sturdy continuous aluminum housings eliminate sagging.
- Pre-focused heat maintains safe serving temperatures longer without continuing to cook the food.
- Variety of models, configurations, colors and accessories provide unlimited flexibility.
- Optional coated shatter-resistant incandescent lights enhance brilliant product display while safeguarding food from bulb breakage.



Model GR2AH-24



Model GR2AHL-24D with optional breath protectors



Model GR2AL-36 with *Designer* legs for hanging installations

Remote Control Enclosures



Model RMB-14D with infinite controls



Model RMB-3F with toggle switch and indicator light



Model RMB-7D with optional *Designer* color



HATCO CORPORATION P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.
(800) 558-0607 • (414) 671-6350 • Fax (800) 543-7521 • Int'l. Fax (414) 671-3976
www.hatcocorp.com • E-mail: equipsales@hatcocorp.com

METAL SHEATHED ELEMENTS GUARANTEED AGAINST BURNOUT AND BREAKAGE FOR TWO YEARS.


Form No. GR2A Spec Sheet

Printed in U.S.A.
April 2007



GLO-RAY® DESIGNER INFRARED FOODWARMERS

Models GR2A-18, -24, -30, -36, -42, -48, -54, -60, -66, -72, -84 GR2AH-18, -24, -30, -36, -42, -48, -54, -60, -66, -72, -84
GR2A-18D, -24D, -30D, -36D, -42D, -48D, -54D, -60D, -66D, -72D, -84D GR2AH-18D, -24D, -30D, -36D, -42D, -48D, -54D, -60D, -66D, -72D, -84D

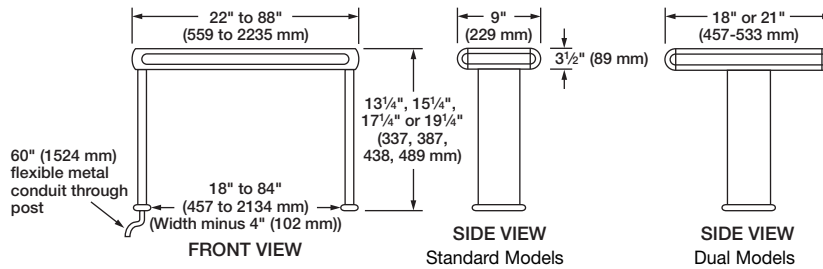

SPECIFICATIONS

High Watt		Standard Watt			
Model	Watt	Model	Watt	Width	Shipping Weight [■]
GR2AH-18	350	GR2A-18	250	22" (559 mm)	28 lbs. (12 kg)
GR2AH-24	500	GR2A-24	350	28" (711 mm)	32 lbs. (15 kg)
GR2AH-30	660	GR2A-30	450	34" (864 mm)	35 lbs. (16 kg)
GR2AH-36	800	GR2A-36	575	40" (1016 mm)	37 lbs. (17 kg)
GR2AH-42	950	GR2A-42	675	46" (1168 mm)	53 lbs. (25 kg)
GR2AH-48	1100	GR2A-48	800	52" (1321 mm)	64 lbs. (29 kg)
GR2AH-54	1250	GR2A-54	925	58" (1473 mm)	74 lbs. (34 kg)
GR2AH-60	1400	GR2A-60	1050	64" (1626 mm)	82 lbs. (37 kg)
GR2AH-66*	1560	GR2A-66	1160	70" (1778 mm)	91 lbs. (41 kg)
GR2AH-72*	1725	GR2A-72	1275	76" (1930 mm)	100 lbs. (45 kg)
GR2AH-84* [▲]	2050	GR2A-84	1500	88" (2235 mm)	120 lbs. (54 kg)

High Watt Dual		Standard Watt Dual			
Model	Watt	Model	Watt	Width	Shipping Weight [■]
GR2AH-18D	700	GR2A-18D	500	22" (559 mm)	44 lbs. (20 kg)
GR2AH-24D	1000	GR2A-24D	700	28" (711 mm)	48 lbs. (22 kg)
GR2AH-30D	1320	GR2A-30D	900	34" (864 mm)	52 lbs. (24 kg)
GR2AH-36D	1600	GR2A-36D	1150	40" (1016 mm)	57 lbs. (26 kg)
GR2AH-42D	1900	GR2A-42D	1350	46" (1168 mm)	66 lbs. (30 kg)
GR2AH-48D	2200	GR2A-48D	1600	52" (1321 mm)	77 lbs. (35 kg)
GR2AH-54D	2500	GR2A-54D	1850	58" (1473 mm)	88 lbs. (40 kg)
GR2AH-60D	2800	GR2A-60D	2100	64" (1626 mm)	97 lbs. (44 kg)
GR2AH-66D*	3120	GR2A-66D	2320	70" (1778 mm)	107 lbs. (49 kg)
GR2AH-72D*	3450	GR2A-72D	2550	76" (1930 mm)	117 lbs. (53 kg)
GR2AH-84D* [▲]	4100	GR2A-84D	3000	88" (2235 mm)	138 lbs. (63 kg)

* 120 volt models with infinite switch require tandem (end-to-end) elements.

[▲] 120 volt models of GR2AH-84 and GR2AH-84D contain tandem elements individually controlled.

[■] Does not include RMB.

OPTIONS (NOT FOR RETROFIT)

- Unit and Inset Panel *Designer* Colors: Warm Red, Black, Gray Granite, White Granite, Navy Blue, Hunter Green
- Dark Gray *Designer* Corner Caps (Black is standard)
- Breath Protectors – 7 1/2" or 14" (191 or 356 mm)

DIMENSIONS

GR2A & GR2AH: 22"-88"W x 9"D* x 3 1/2"H without legs (559-2235 x 229 x 89 mm).

GR2A-XXD & GR2AH-XXD: 22"-88"W x 18" or 21"D x 3 1/2"H without legs (559-2235 x 457 or 533 x 89 mm).

* Add 3" (76 mm) to depth for models with lights.

VOLTAGE

120, 208 and 240 volts, single phase.

Models with Lights: 120, (3-wire), 120/208 and 120/240 volts, single phase, (4-wire). Export voltages available.

REMOTE CONTROL ENCLOSURES

Model	Width	Toggle Switches
RMB-3	5 1/2" (140 mm)	2 Maximum
RMB-7	9" (229 mm)	4 Maximum
RMB-14	14" (356 mm)	6 Maximum
RMB-16	16" (406 mm)	3 Maximum
RMB-20	20" (508 mm)	3 Maximum

NOTE: ONE CONTROL BOX PER FOODWARMER.

MOUNTING REQUIREMENTS

Recommended Mounting Height –

Single Infrared Foodwarmer Models
Standard Watt: 10"-12" (254-305 mm)
High Watt: 12"-14" (305-356 mm)

Dual Infrared Foodwarmer Models
Standard Watt: 10"-14" (254-356 mm)
High Watt: 14"-16" (356-406 mm)

MINIMUM SPACING –

May not be installed in combustible surroundings.

Must be installed no closer than 6" (152 mm) from a non-combustible back wall and above a non-combustible surface.

- Designer* Non-Adjustable Stands 10", 12", 16" (254, 305, 406 mm) Height in lieu of Standard 14" (356 mm) Stands
- 4" (102 mm) *Designer* Overhead Mounts
- Halogen Bulbs in lieu of Standard Display Lights

PRODUCT SPECS

Designer Infrared Foodwarmer

The *Designer* Infrared Foodwarmer shall be a Glo-Ray®, manufactured by the Hatco Corporation, Milwaukee, WI 53234 U.S.A.

With 24/7 service (U.S. and Canada only), the Foodwarmer shall be a Glo-Ray Model ..., rated at ...watts, ...volts, single phase and be ...inches (millimeters) in overall width.

The Glo-Ray shall consist of an aluminum housing and include as standard equipment 14" (356 mm) *Designer* legs.

The infrared heating element shall be tubular metal sheathed. The foodwarmer shall be factory assembled ready for electrical installation.

Options shall include *Designer* non-adjustable tubular legs in various sizes, hanger legs, dark gray *Designer* corner caps, breath protectors, lights, and remote control enclosure.

HATCO CORPORATION P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. • (800) 558-0607 • (414) 671-6350
Fax (800) 543-7521 • Int'l. Fax (414) 671-3976 • www.hatcocorp.com • E-mail: equipsales@hatcocorp.com