



GLO-RAY® BUILT-IN HEATED SHELVES

Models GRSB-24-F, -I, -O, -30-F, -I, -O, -36-F, -I, -O, -42-F, -I, -O, -48-F, -I, -O, -54-I, -60-F, -I, -O, -66-I, -72-F, -I, -O, GRSBF-24-F, -I, -S, -O, -30-F, -I, -S, -O, -36-F, -I, -S, -O, -42-F, -I, -S, -O, -48-F, -I, -S, -O, -60-F, -I, -S, -O, -72-F, -I, -S, -O

The Hatco Glo-Ray Built-in Heated Shelf has a hardcoat aluminum top and blanket type foil element for uniform heat. Fiberglass insulation keeps heat at the holding surface while a built-in adjustable thermostat controls surface temperature. Recommended for use in metallic counters. For other surfaces, verify that the material is suitable for temperature up to 180°F (82°C). Hatco is not responsible for counter damage caused by heat from the warmer.

FLEXIBILITY

Ideal for pass-through areas, buffet lines or as a heated work shelf.

The Built-in Heated Shelf models feature a hardcoated aluminum top and blanket-type foil element for uniform heat distribution. Available as flush top or 1/2" (13 mm) recessed models.

A 3' (914 mm) flexible conduit channels the power lines from the shelf to a remote control enclosure. The control enclosure comes with a control thermostat with a range of 80° to 181°F (27° to 83°C), an illuminated on/off switch and mounting brackets. The attached control enclosure can be mounted remotely up to 3' (914 mm) from the unit. A 6' (1829 mm) cord and plug is attached to easily reach the power source.

The Built-in Heated Shelf has a 3/4" (19 mm) flanged edge that allows the unit to fit into a countertop opening. The Heated Shelf is easy-to-clean with a soft damp cloth or non-abrasive cleaner.

QUALITY

The following features assure the finest performance for years to come:

- All models feature a thermostatically-controlled heated base to extend the holding times of most food.
- GRSB models available in widths from 24" to 72" (610-1829 mm) and depths of 15 1/2", 19 1/2", or 30" (394, 495, or 762 mm).
- GRSBF models are available in widths from 25 1/2" to 73 1/2" (648-1867 mm) and depths of 17", 21", 25 1/2", or 31 1/2" (432, 533, 648, or 800 mm).



Model GRSBF-72-O
with accessory pizza pans



Model GRSB-30-I

GRSB/GRSBF Countertop Cut-Out Dimensions

Item	Minimum Width	Maximum Width	Minimum Depth	Maximum Depth
GRSB-24-F/GRSBF-24-F	24 1/2" (622 mm)	24 3/4" (629 mm)	16" (406 mm)	16 1/4" (413 mm)
GRSB-24-I/GRSBF-24-I	24 1/2" (622 mm)	24 3/4" (629 mm)	20" (508 mm)	20 1/4" (514 mm)
GRSBF-24-S	24 1/2" (622 mm)	24 3/4" (629 mm)	24 1/2" (622 mm)	24 3/4" (629 mm)
GRSB-24-O/GRSBF-24-O	24 1/2" (622 mm)	24 3/4" (629 mm)	30 1/2" (775 mm)	30 3/4" (781 mm)
GRSB-30-F/GRSBF-30-F	30 1/2" (775 mm)	30 3/4" (781 mm)	16" (406 mm)	16 1/4" (413 mm)
GRSB-30-I/GRSBF-30-I	30 1/2" (775 mm)	30 3/4" (781 mm)	20" (508 mm)	20 1/4" (514 mm)
GRSBF-30-S	30 1/2" (775 mm)	30 3/4" (781 mm)	24 1/2" (622 mm)	24 3/4" (629 mm)
GRSB-30-O/GRSBF-30-O	30 1/2" (775 mm)	30 3/4" (781 mm)	30 1/2" (775 mm)	30 3/4" (781 mm)
GRSB-36-F/GRSBF-36-F	36 1/2" (927 mm)	36 3/4" (933 mm)	16" (406 mm)	16 1/4" (413 mm)
GRSB-36-I/GRSBF-36-I	36 1/2" (927 mm)	36 3/4" (933 mm)	20" (508 mm)	20 1/4" (514 mm)
GRSBF-36-S	36 1/2" (927 mm)	36 3/4" (933 mm)	24 1/2" (622 mm)	24 3/4" (629 mm)
GRSB-36-O/GRSBF-36-O	36 1/2" (927 mm)	36 3/4" (933 mm)	30 1/2" (775 mm)	30 3/4" (781 mm)
GRSB-42-F/GRSBF-42-F	42 1/2" (1080 mm)	42 3/4" (1086 mm)	16" (406 mm)	16 1/4" (413 mm)
GRSB-42-I/GRSBF-42-I	42 1/2" (1080 mm)	42 3/4" (1086 mm)	20" (508 mm)	20 1/4" (514 mm)
GRSBF-42-S	42 1/2" (1080 mm)	42 3/4" (1086 mm)	24 1/2" (622 mm)	24 3/4" (629 mm)
GRSB-42-O/GRSBF-42-O	42 1/2" (1080 mm)	42 3/4" (1086 mm)	30 1/2" (775 mm)	30 3/4" (781 mm)
GRSB-48-F/GRSBF-48-F	48 1/2" (1232 mm)	48 3/4" (1238 mm)	16" (406 mm)	16 1/4" (413 mm)
GRSB-48-I/GRSBF-48-I	48 1/2" (1232 mm)	48 3/4" (1238 mm)	20" (508 mm)	20 1/4" (514 mm)
GRSBF-48-S	48 1/2" (1232 mm)	48 3/4" (1238 mm)	24 1/2" (622 mm)	24 3/4" (629 mm)
GRSB-48-O/GRSBF-48-O	48 1/2" (1232 mm)	48 3/4" (1238 mm)	30 1/2" (775 mm)	30 3/4" (781 mm)
GRSB-54-I	54 1/2" (1384 mm)	54 3/4" (1391 mm)	20" (508 mm)	20 1/4" (514 mm)
GRSB-60-F/GRSBF-60-F	60 1/2" (1537 mm)	60 3/4" (1543 mm)	16" (406 mm)	16 1/4" (413 mm)
GRSB-60-I/GRSBF-60-I	60 1/2" (1537 mm)	60 3/4" (1543 mm)	20" (508 mm)	20 1/4" (514 mm)
GRSBF-60-S	60 1/2" (1537 mm)	60 3/4" (1543 mm)	24 1/2" (622 mm)	24 3/4" (629 mm)
GRSB-60-O/GRSBF-60-O	60 1/2" (1537 mm)	60 3/4" (1543 mm)	30 1/2" (775 mm)	30 3/4" (781 mm)
GRSB-66-I	66 1/2" (1689 mm)	66 3/4" (1695 mm)	20" (508 mm)	20 1/4" (514 mm)
GRSB-72-F/GRSBF-72-F	72 1/2" (1842 mm)	72 3/4" (1848 mm)	16" (406 mm)	16 1/4" (413 mm)
GRSB-72-I/GRSBF-72-I	72 1/2" (1842 mm)	72 3/4" (1848 mm)	20" (508 mm)	20 1/4" (514 mm)
GRSBF-72-S	72 1/2" (1842 mm)	72 3/4" (1848 mm)	24 1/2" (622 mm)	24 3/4" (629 mm)
GRSB-72-O/GRSBF-72-O	72 1/2" (1842 mm)	72 3/4" (1848 mm)	30 1/2" (775 mm)	30 3/4" (781 mm)




HATCO CORPORATION P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A.
(800) 558-0607 • (414) 671-6350 • Fax (800) 543-7521 • Int'l. Fax (414) 671-3976
www.hatcocorp.com • E-mail: equipsales@hatcocorp.com




GLO-RAY® BUILT-IN HEATED SHELVES

Models GRSB-24-F, -I, -O, -30-F, -I, -O, -36-F, -I, -O, -42-F, -I, -O, -48-F, -I, -O, -54-I, -60-F, -I, -O, -66-I, -72-F, -I, -O
GRSBF-24-F, -I, -S, -O, -30-F, -I, -S, -O, -36-F, -I, -S, -O, -42-F, -I, -S, -O, -48-F, -I, -S, -O, -60-F, -I, -S, -O, -72-F, -I, -S, -O

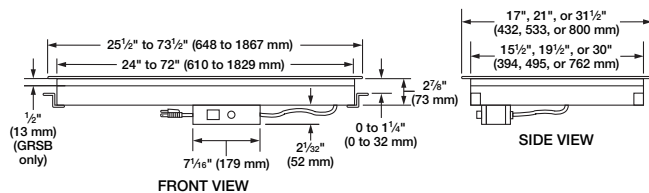

GRSB Models

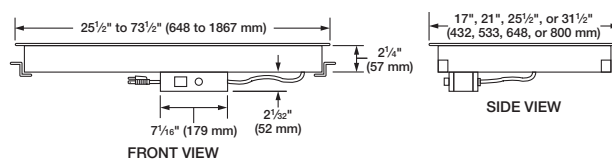

GRSBF Models

SPECIFICATIONS

Built-in Heated Shelf with Inset Top

Model	Watts	Interior Width	Shipping Weight
GRSB-24-F	420	24" (610 mm)	20 lbs. (9 kg)
GRSB-24-I	550	24" (610 mm)	22 lbs. (10 kg)
GRSB-24-O	790	24" (610 mm)	26 lbs. (12 kg)
GRSB-30-F	505	30" (762 mm)	23 lbs. (10 kg)
GRSB-30-I	665	30" (762 mm)	25 lbs. (11 kg)
GRSB-30-O	950	30" (762 mm)	28 lbs. (13 kg)
GRSB-36-F	590	36" (914 mm)	26 lbs. (12 kg)
GRSB-36-I	780	36" (914 mm)	29 lbs. (13 kg)
GRSB-36-O	1110	36" (914 mm)	32 lbs. (15 kg)
GRSB-42-F	685	42" (1067 mm)	29 lbs. (13 kg)
GRSB-42-I	885	42" (1067 mm)	32 lbs. (15 kg)
GRSB-42-O	1270	42" (1067 mm)	35 lbs. (16 kg)
GRSB-48-F	770	48" (1219 mm)	33 lbs. (15 kg)
GRSB-48-I	1000	48" (1219 mm)	36 lbs. (16 kg)
GRSB-48-O	1430	48" (1219 mm)	39 lbs. (18 kg)
GRSB-54-I	1110	54" (1372 mm)	43 lbs. (20 kg)
GRSB-60-F	950	60" (1524 mm)	45 lbs. (20 kg)
GRSB-60-I	1220	60" (1524 mm)	50 lbs. (23 kg)
GRSB-60-O	1750	60" (1524 mm)	54 lbs. (24 kg)
GRSB-66-I	1330	66" (1676 mm)	54 lbs. (25 kg)
GRSB-72-F	1130	72" (1829 mm)	52 lbs. (24 kg)
GRSB-72-I	1440	72" (1829 mm)	58 lbs. (26 kg)
GRSB-72-O	2070	72" (1829 mm)	64 lbs. (29 kg)

Built-in Heated Shelf with Flush Top

Model	Watts	Heated Width	Shipping Weight
GRSBF-24-F	420	25 1/2" (648 mm)	20 lbs. (9 kg)
GRSBF-24-I	550	25 1/2" (648 mm)	22 lbs. (10 kg)
GRSBF-24-S	700	25 1/2" (648 mm)	24 lbs. (11 kg)
GRSBF-24-O	790	25 1/2" (648 mm)	26 lbs. (12 kg)
GRSBF-30-F	505	31 1/2" (800 mm)	23 lbs. (10 kg)
GRSBF-30-I	665	31 1/2" (800 mm)	25 lbs. (11 kg)
GRSBF-30-S	825	31 1/2" (800 mm)	26 lbs. (12 kg)
GRSBF-30-O	950	31 1/2" (800 mm)	28 lbs. (13 kg)
GRSBF-36-F	590	37 1/2" (953 mm)	26 lbs. (12 kg)
GRSBF-36-I	780	37 1/2" (953 mm)	28 lbs. (13 kg)
GRSBF-36-S	950	37 1/2" (953 mm)	31 lbs. (15 kg)
GRSBF-36-O	1110	37 1/2" (953 mm)	32 lbs. (15 kg)
GRSBF-42-F	685	43 1/2" (1105 mm)	29 lbs. (13 kg)
GRSBF-42-I	885	43 1/2" (1105 mm)	32 lbs. (15 kg)
GRSBF-42-S	1100	43 1/2" (1105 mm)	34 lbs. (15 kg)
GRSBF-42-O	1270	43 1/2" (1105 mm)	35 lbs. (16 kg)
GRSBF-48-F	770	49 1/2" (1257 mm)	33 lbs. (15 kg)
GRSBF-48-I	1000	49 1/2" (1257 mm)	36 lbs. (16 kg)
GRSBF-48-S	1225	49 1/2" (1257 mm)	38 lbs. (17 kg)
GRSBF-48-O	1430	49 1/2" (1257 mm)	39 lbs. (18 kg)

PRODUCT SPECS

Built-in Heated Shelf

The Heated Shelf shall be a Glo-Ray® Modelas manufactured by the Hatco Corporation, Milwaukee, WI 53234 U.S.A.

HATCO CORPORATION P.O. Box 340500 Milwaukee, WI 53234-0500 U.S.A. • (800) 558-0607 • (414) 671-6350
Fax (800) 543-7521 • Int'l. Fax (414) 671-3976 • www.hatcocorp.com • E-mail: equipsales@hatcocorp.com

DIMENSIONS

GRSB: (Interior Width + 1 1/2") W x 17", 21", or 31 1/2"D x 2 7/8" H
(Interior Width + 38 x 432, 533, or 800 x 73 mm).

Cutout: (Interior Width + 1/2" to 3/4") W x 16", 20", or 30 1/2"D
(Interior Width + 13 to 19 mm x 406, 508, or 775 mm).

GRSBF: (25 1/2" to 73 1/2") W x 17", 21", 25 1/2", or 31 1/2"D x 2 1/4" H
(648 to 1867 x 432, 533, 648, or 800 x 57 mm).

Cutout: (Width - 3/4" to 1") W x 16", 20", 24 1/2", or 30 1/2"D
(Width - 19 to 25 mm x 406, 508, 622, or 775 mm).

VOLTAGE

All models ending in -F and -I and models 24" through 48" (610-1219 mm) wide ending in -S and -O: 120 volts, single phase only, NEMA 5-15P.

Models 60" through 72" (1524-1829 mm) wide ending in -S and -O: 120 volts, single phase only, NEMA 5-20P.


GRSB-72-O and GRSBF-72-O: 208 or 240 volts, single phase only, NEMA 6-15P.

Export voltages available.

CORD LOCATION

End of Remote Enclosure.

PLUG CONFIGURATIONS

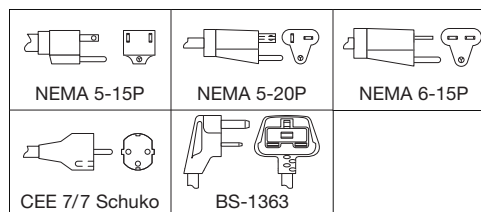

UNIT DEPTH CODES:

F = 17" (432 mm)

I = 21" (533 mm)

S = 25 1/2" (648 mm)

O = 31 1/2" (800 mm)

Built-in Heated Shelf with Flush Top

Model	Watts	Heated Width	Shipping Weight
GRSBF-60-F	950	61 1/2" (1562 mm)	45 lbs. (20 kg)
GRSBF-60-I	1220	61 1/2" (1562 mm)	50 lbs. (23 kg)
GRSBF-60-S	1500	61 1/2" (1562 mm)	53 lbs. (24 kg)
GRSBF-60-O	1750	61 1/2" (1562 mm)	54 lbs. (25 kg)
GRSBF-72-F	1130	73 1/2" (1867 mm)	52 lbs. (24 kg)
GRSBF-72-I	1440	73 1/2" (1867 mm)	58 lbs. (26 kg)
GRSBF-72-S	1750	73 1/2" (1867 mm)	62 lbs. (28 kg)
GRSBF-72-O	2070	73 1/2" (1867 mm)	64 lbs. (29 kg)

OPTIONS (NOT FOR RETROFIT)

Stainless Steel Top Surface (GRSBF models only)

The Shelf shall be rated atwatts,volts and beinches (millimeters) in overall width. It shall consist of a thermostatically-controlled heated base and a cord with plug attached.