

ITEM NO	
PROJECT	
LOCATION	
DATE	QTY



MBSMP-A SERIES

Mega Top Sandwich/Salad Prep Units

MODELS

- □ MBSMP27-12A □ MBSMP36-15A □ MBSMP48-18A
- □ MBSMP60-24A □ MBSMP72-30A






Drop-in section:

- Fans force cold air into this enclosed area keeping stored food items consistently cold
- A stainless steel divider prevents food spillage into the storage area beneath
- Accommodates 6" deep pans (4" standard)

FEATURES



Standard condenser filter screen, removable without tools, for easy condenser coil cleaning resulting in peak efficiency and extended equipment life.

CONSTRUCTION

- Front-breathing design allows for zero-clearance installation on sides and back
- Stainless steel interior and exterior
- Foamed-in-place with low ODP polyurethane insulation
- Standard 91/2" deep reversible cutting board
- Insulated top lid
- Wall thickness: 2"
- 6" overall height casters
- Adjustable heavy-duty vinyl-coated shelves
- Field reversible door on MBSMP27-12A

- 1/6 size pans included
- Pan adapter bars run front-to-back and side-to-side allowing mixed pan sizes to fit menu requirements
- Pan adapter bars lock together to hold pans in place

DOORS

- Self-closing
- Standard door swing configuration:
- 1-door models hinged right
- 2-door models......left hinged left,
 right hinged right
- 3-door models......left hinged left, middle hinged left, right hinged right
- Door width:

Door width.	
– MBSP27-8A	271/2
- MBSP36-10A	171/2
- MBSP48-12A	231/2
– MBSP60-16A	291/2
- MBSP72-18A	231/2

REFRIGERATION

- Self-contained refrigeration system
- Forced air system
- Coated evaporator coil
- Refrigerant: R-134a
- Temperature range: 32° to 40°F (0° to 4°C)

WARRANTY

- Standard limited three year parts and labor
- Additional two year coverage on compressor part

OPTIONS

- ☐ 6" legs in lieu of casters (legs shipped loose)
- ☐ 4" casters in lieu of 6" casters (casters shipped loose)
- ☐ Additional shelves

☐ Stainless steel back

☐ Single or double

overshelf




□ Refrigerated drawers (excluding MBSMP36-15A)



TECHNICAL SPECIFICATIONS

	DIMENSIONS (in)		DIMENSIONS DIMENSIONS (in.) (mm)				INIT	NO. OF	NO OF	NO. OF	CAP.	SHIP	SHIP WT.		
MODEL	L	D*	H**	L	D*	H**	VOLTS	AMPS	UNIT H.P.		NO. OF SHELVES	PANS	FT.	CU. FT.	LB/KG
MBSMP27-12A	271/2	367/8	445/8	699	937	1133	115	3.6	1/5	1	1	(12) 1/6	7.2	28.27	210/95
MBSMP36-15A	36	367/8	445/8	914	937	1133	115	3.6	1/5	2	2	(15) 1/6	9.9	35.61	266/121
MBSMP48-18A	48	367/8	445/8	1219	937	1133	115	5.2	3/8	2	2	(18) 1/6	13.4	45.97	323/147
MBSMP60-24A	60	367/8	445/8	1524	937	1133	115	5.2	3/8	2	2	(24) 1/6	16.2	56.33	378/172
MBSMP72-30A	72	$36^{7}/_{8}$	445/8	1829	937	1133	115	5.2	3/8	3	3	(30) 1/6	20.4	66.69	413/188

^{*}Depth includes cutting board. **Height includes casters.

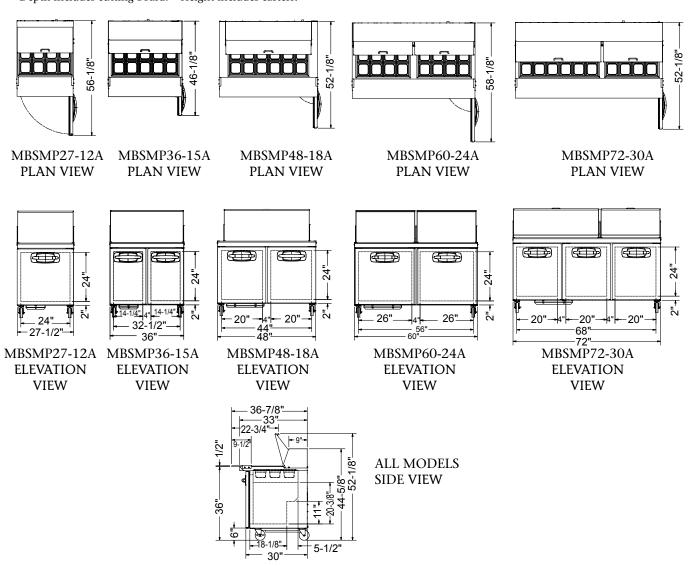

LISTINGS




HOOKUP


All models via plug in, 9 foot long flexible three wire 18/3 cord with molded plug.



OPTIONAL REFRIGERATED DRAWER CONFIGURATIONS (Not available on MBSMP36-15A model)

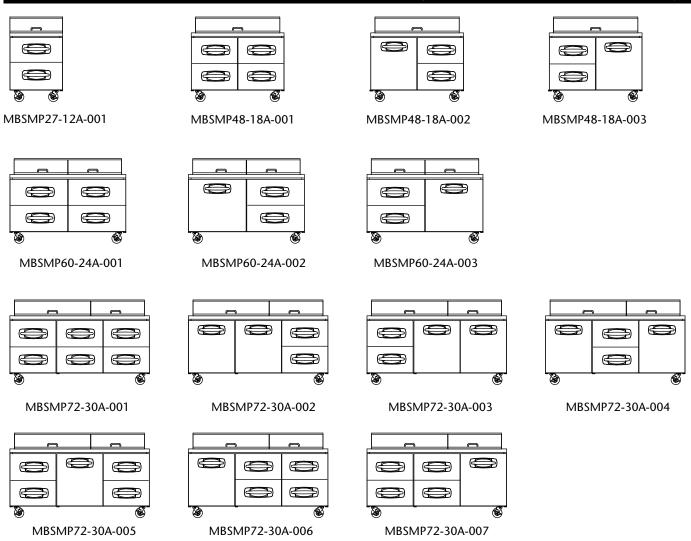

PAN CONFIGURATIONS FOR REFRIGERATED DRAWERS (Not available on MBSMP36-15A model)

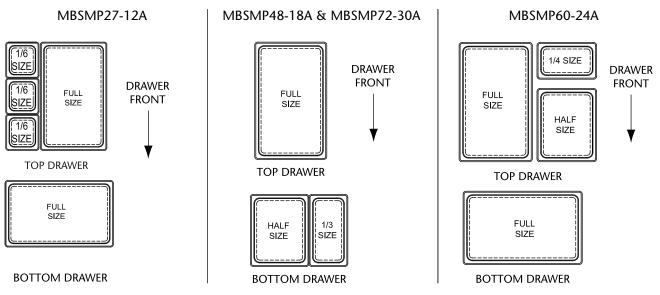


*U.S. size pans, pans provided by others. Drawers accept up to 6-inch deep pans.





MBSMP-A SERIES

MEGA TOP SANDWICH/SALAD PREP UNITS

OPTIONAL OVERSHELF SPECIFICATIONS









PLAN VIEW MBSP27-8A, MBSMP27-12A

PLAN VIEW MBSP36-10A, MBSMP36-15A


PLAN VIEW MBSP48-12A, MBSMP48-18A




PLAN VIEW MBSP60-16A, MBSMP60-24A



PLAN VIEW MBSP72-18A, MBSMP72-30A



SINGLE SHELF SIDE VIEW



DOUBLE SHELF SIDE VIEW

BID SPECIFICATIONS

Item no. MBSMP_____A. Provide ____ Mega Top Sandwich/Salad Prep Unit(s), Master-Bilt® model no. MBSMP_____A.

Prep unit will feature will feature condenser coil filter screen, removable without tools, for simple preventative maintenance cleaning.

Prep unit will feature stainless steel

construction on interior and exterior and will be equipped with pan adapter bars allowing mixed sized pans.

The refrigeration system will be bottom mounted and self-contained. System will be front-breathing allowing for zero-clearance installation on sides and back. Refrigerant will be R-134a. The temperature

range will be 32° to 40° F (0° to 4° C).

Prep unit to have standard limited three year parts and labor with additional two year coverage on compressor part.

Prep unit will be UL & C-UL listed and UL EPH classified.

NOTE: Cabinet designed for optimum performance in air-conditioned area at 75°F ambient and 55% relative humidity. All specifications subject to change without notice.



908 Highway 15 North • New Albany, MS 38652

PHONE: 800-647-1284 or 662-534-9061 • FAX: 800-232-3966 or 662-534-6049 • www.master-bilt.com