



MBUF/MBUR60A



## MBU-A SERIES

### Undercounter/Worktable Refrigerators & Freezers


#### REFRIGERATORS

- MBUR27A
- MBUR36A
- MBUR48A
- MBUR60A
- MBUR72A

#### FREEZERS

- MBUF27A
- MBUF48A
- MBUF60A

### FEATURES

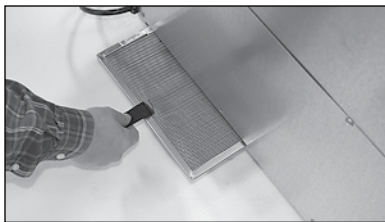

Standard condenser filter screen, removable without tools, for easy condenser coil cleaning resulting in peak efficiency and extended equipment life.

#### CONSTRUCTION

- Stainless steel interior and exterior
- Foamed-in-place with low ODP polyurethane insulation
- Wall thickness: 2"
- 6" overall height casters
- Adjustable heavy-duty shelves, one per door
- Front-breathing design allows for zero-clearance installation on sides, back and top

#### DOORS

- Self-closing with heavy-duty recessed pocket handle
- Standard door swing configuration:
  - 1-door models ..... hinged right
  - 2-door models.....left hinged left, right hinged right
  - 3-door model.....left hinged left, middle door hinged left, right door hinged right
- Field reversible doors on MBUR27A & MBUF27A models
- Door width:
  - MBUR/MBUF27A ..... 27<sup>1</sup>/<sub>2</sub>"
  - MBUR36A ..... 17<sup>1</sup>/<sub>2</sub>"
  - MBUR/MBUF48A..... 23<sup>1</sup>/<sub>2</sub>"
  - MBUR/MBUF60A..... 29<sup>1</sup>/<sub>2</sub>"
  - MBUR72A ..... 23<sup>1</sup>/<sub>2</sub>"

#### REFRIGERATION

- Self-contained forced air capillary tube refrigeration system
- Refrigerant: R290
- Temperature range:
  - MBUR-A.....34° to 38°F (1° to 3°C)
  - MBUF-A.....-5° to 0°F (-20° to -17°C)

#### WARRANTY

- **Standard limited three year parts and labor**
- **Additional two year coverage on compressor part**


#### OPTIONS

- Low profile casters for ADA compliance
- Stacking kit for MBUR27A
- Factory installed door locks
- Additional shelves
- 4" base (excluding MBUR72A, shipped loose)
- Stainless steel backsplash
- 4" casters in lieu of 6" casters (shipped loose)
- 6" legs in lieu of casters (shipped loose)
- Single or double overshelf
- Refrigerated drawers for MBUR-A models (excluding MBUR36A)

# TECHNICAL SPECIFICATIONS

MODEL	DIMENSIONS (in.)			DIMENSIONS (mm)			VOLTS	AMPS	UNIT H.P.	NO. OF DOORS	NO. OF SHELVES	CAP. CU. FT.	SHIP CU. FT.	SHIP WT. (LB/KG)
	L	D	H*	L	D	H*								
<b>REFRIGERATORS</b>														
MBUR27A	27 <sup>1/2</sup>	30	36	699	762	917	115	2.1	1/5	1	1	7.5	24.8	190/86
MBUR36A	36	30	36	914	762	917	115	2.1	1/5	2	2	10.0	31.2	220/100
MBUR48A	48	30	36	1219	762	917	115	2.1	1/5	2	2	13.7	40.4	255/116
MBUR60A	60	30	36	1524	762	917	115	3.2	3/8	2	2	17.5	49.4	305/138
MBUR72A	72	30	36	1829	762	917	115	3.2	3/8	3	3	21.0	58.5	365/166
<b>FREEZERS</b>														
MBUF27A	27 <sup>1/2</sup>	30	36	699	762	917	115	3.5	1/3	1	1	7.5	24.8	195/89
MBUF48A	48	30	36	1219	762	917	115	5.3	1/2	2	2	13.7	40.4	265/120
MBUF60A	60	30	36	1524	762	917	115	5.3	1/2	2	2	17.5	49.4	320/145

\*Height includes casters.

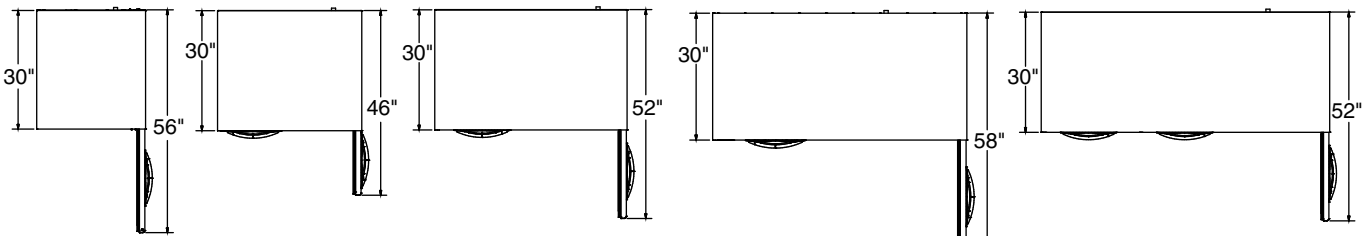


MBUR/MBUF27A  
PLAN VIEW

MBUR36A  
PLAN VIEW


MBUR/MBUF48A  
PLAN VIEW

MBUR/MBUF60A  
PLAN VIEW


MBUR72A  
PLAN VIEW

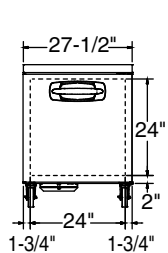


MBUR/MBUF27A  
ELEVATION VIEW

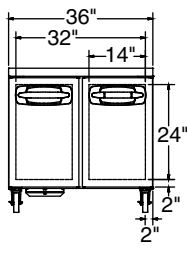


MBUR36A  
ELEVATION VIEW

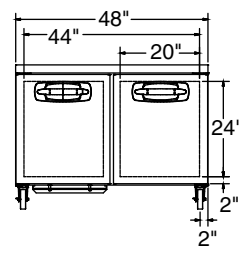


MBUR/MBUF48A  
ELEVATION VIEW

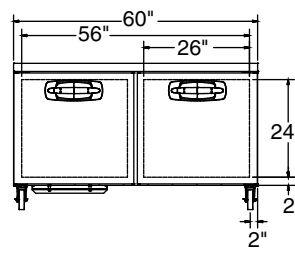

MBUR/MBUF60A  
ELEVATION VIEW

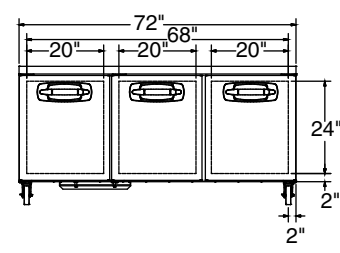

MBUR72A  
ELEVATION VIEW



ALL MODELS  
SIDE VIEW


## LISTINGS



ANSI/NSF 7

## HOOKUP


All models via plug in, 9 foot long flexible three wire 18/3 cord with molded plug.




NEMA 5-15P

## OPTIONAL REFRIGERATED DRAWER CONFIGURATIONS


MBUR-A models only, not available on MBUR36A.




MBUR27A-001




MBUR48A-001




MBUR48A-002




MBUR48A-003




MBUR60A-001




MBUR60A-002




MBUR60A-003




MBUR72A-001




MBUR72A-002




MBUR72A-003




MBUR72A-004



MBUR72A-005




MBUR72A-006



MBUR72A-007

## PAN CONFIGURATIONS FOR REFRIGERATED DRAWERS


MBUR-A models only, not available on MBUR36A.

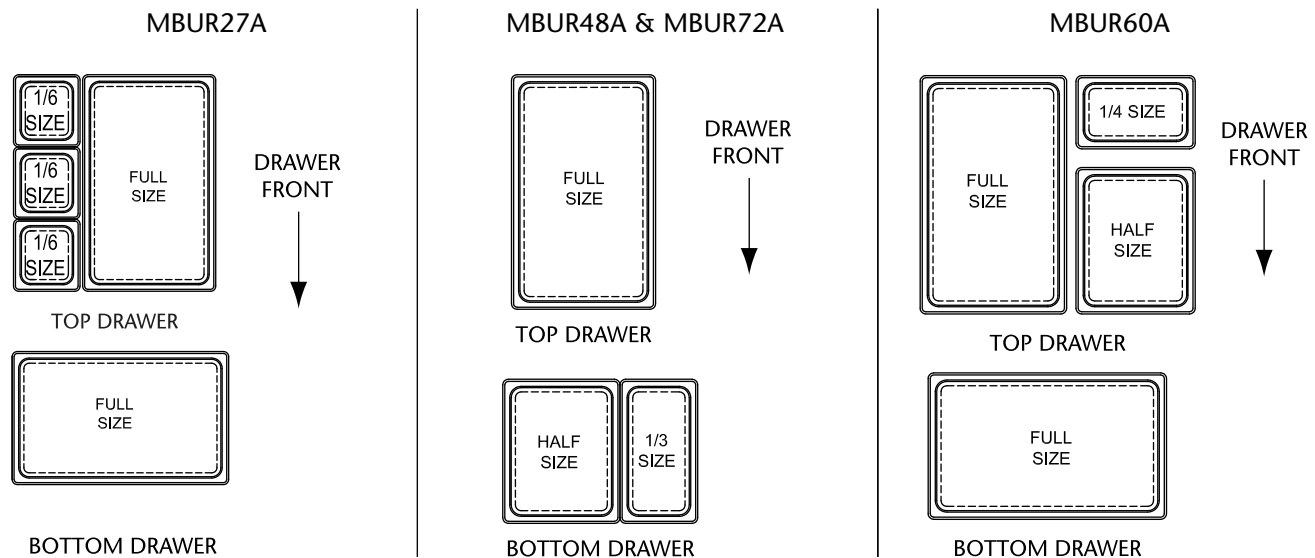


\*U.S. size pans, pans provided by others. Drawers accept up to 6-inch deep pans.  
Drawers designed to hold up to 150 lbs. each.

### OPTIONAL STACKING KIT CONFIGURATIONS

Stacking kits allow two 27 in. wide models to be stacked on top of each other for an over/under effect. Several configurations are possible to help maximize workspace.

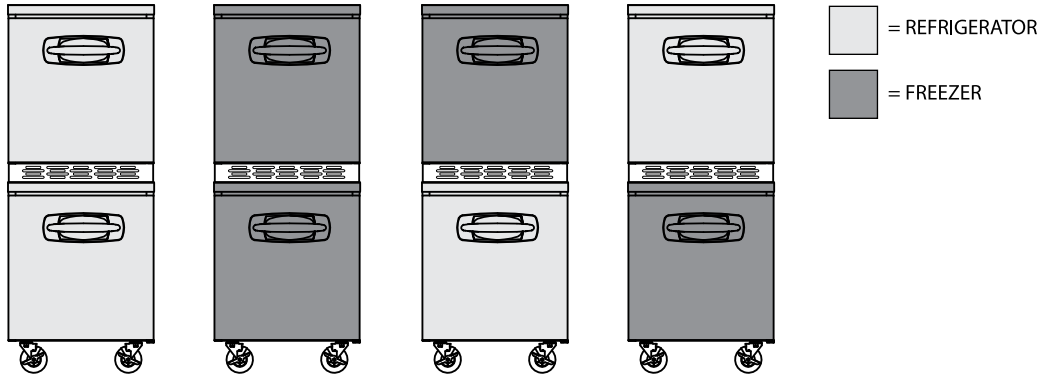

### OPTIONAL OVERSHELF SPECIFICATIONS

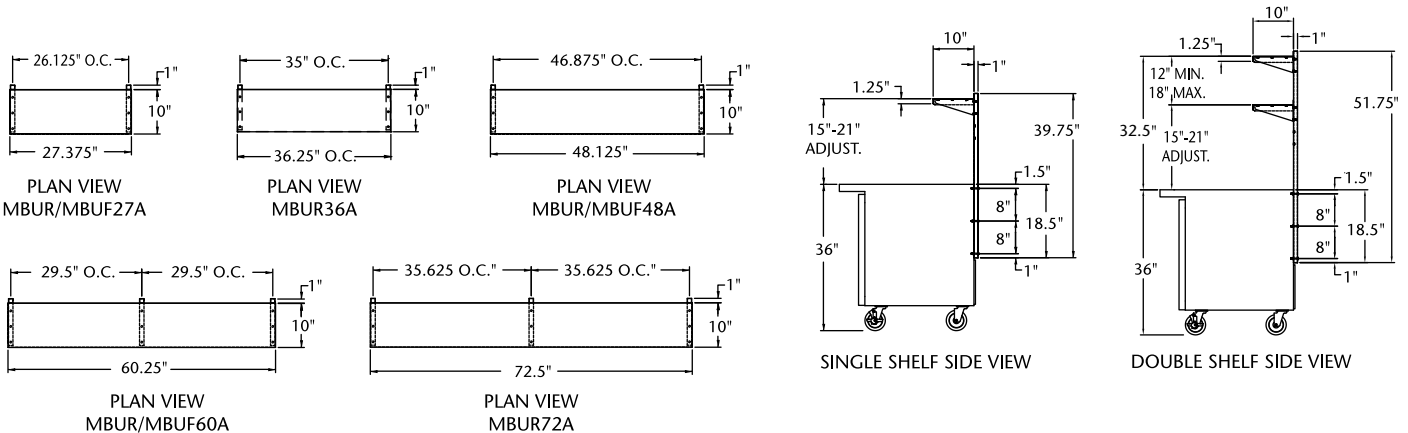

### BID SPECIFICATIONS

Item no. MBU\_\_\_\_A. Provide \_\_\_\_\_  
Undercounter/worktable refrigerator/freezer(s),  
Master-Bilt® model no. MBU\_\_\_\_A.

Undercounter will feature condenser coil  
filter screen, removable without tools, for  
simple preventative maintenance cleaning.

The refrigeration system will be bottom

mounted and self-contained. System will  
be front-breathing allowing for zero-  
clearance installation on sides, back and top.  
Refrigerant for all models will be R290. The  
temperature range will be 34° to 38°F (1° to  
3° C) for refrigerators and -5° to 0°F (-20° to  
-17°C) for freezers.

Undercounter to have standard limited  
three year parts and labor with additional  
two year coverage on compressor part.

Undercounter to be UL & C-UL listed and  
UL EPH classified.

**NOTE:** Cabinet designed for optimum performance in air-conditioned area at 75°F ambient and 55% relative humidity.  
All specifications subject to change without notice.