



## ROUND WARMERS

### Models 4RW, 4RW-L, 4RW-P, 7RW, 7RW-7H, 11RW, 11RW-11H & 11RW-P

#### Features/Benefits:

- ★ Star's Round Warmers keep your product at the right temperature until ready to be served requiring minimum counter space.
- ★ Stainless steel body design for easy maintenance and durable performance.
- ★ Wrap around heating elements with the highest wattage available provide maximum heating for refrigerated or frozen foods.
- ★ Adjustable thermostat holds food product at desired temperature.
- ★ Hi-limit thermostat prevents warmer from overheating.

With 3 sizes and 9 model variations, Star has a warmer perfect for any volume food service need:

- Model 4RW      4 Qt. Basic Warmer - requires optional SSB-4 inset bowl w/cover and ladle
- Model 4RW-L    4 Qt. Basic Warmer w/lock ring and cover, accepts #10 can or optional SSB bowl
- Model 4RW-P    4 Qt. Basic Warmer w/Star's patented pump. Uses #10 can or optional #SSB bowl
- Model 4RW-4H   4 Qt. Warmer with hinged lid and bowl (ladle optional)
- Model 7RW-      7 Qt. Basic Warmer - requires optional SSB-7 inset bowl w/cover and ladle
- Model 7RW-7H   7 Qt. Warmer with hinged lid and bowl (ladle optional)
- Model 11RW     11 Qt. Basic Warmer - requires optional SSB-11 inset bowl w/cover and ladle
- Model 11RW-11H 11 Qt. Warmer with hinged lid and bowl (ladle optional)
- Model 11RW-P   11 Qt. Basic Warmer w/pump - requires optional SSBL inset bowl - cover not required



Model 4RW, 11RW & 7RW



Model 4RW-P

#### Applications:

These 4, 7, and 11 quart, high performance warmers offer the right unit for high or low volume food service venues. Star's round warmers are excellent for warming soups, chili, gravies, and hot fudge in a variety of foodservice operations including schools, restaurants and recreational facilities.

#### Quality Construction:

Star round warmers are constructed with high performance and low maintenance in mind. These units feature a high quality stainless steel body and stainless steel heat well. The stainless steel heat well provides long life, maximum performance, and is easier to clean than heat wells constructed of aluminum or similar materials. Round warmers come complete with skid resistant feet, a 6' lead in cord and NEMA 5-15P for 120V units, a NEMA 6-15P for 208/240V units and CEE7-7 for 240V units.



#### Warranty:

Round warmers are covered by Star's one year parts and labor warranty.

Star Manufacturing International Inc. - 10 Sunnen Drive - P.O. Box 430129 - St. Louis, MO 63143-3800


Phone: (800) 264-7827 - FAX: (800) 264-6666 - www.star-mfg.com

S147/0082



### ROUND WARMERS

*Models 4RW, 4RW-L, 4RW-P, 7RW, 7RW-7H, 11RW, 11RW-11H & 11RW-P*

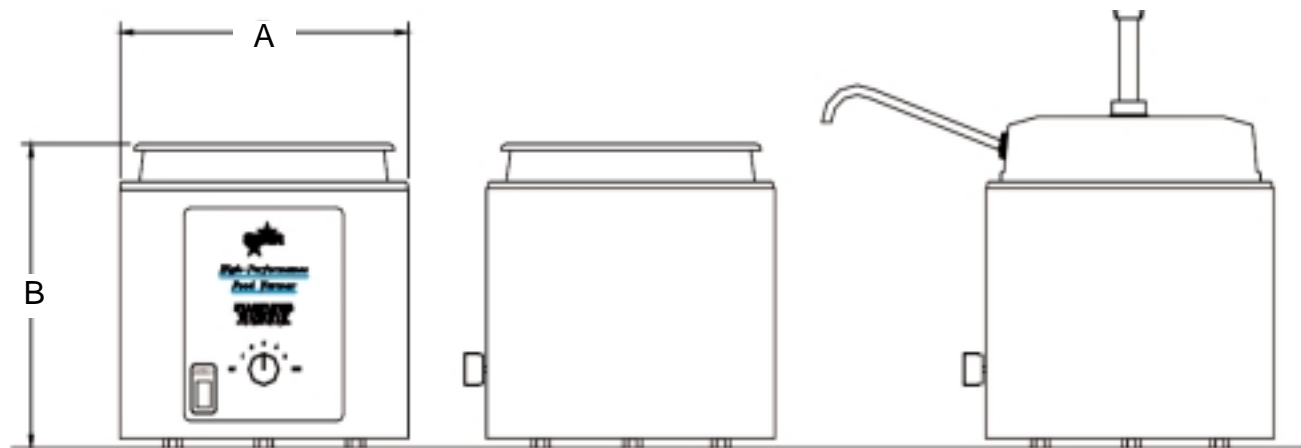

#### Model Specifications

| Model No. | Description   | Dimensions               |                        | Voltage | Wattage | NEMA Plug | Approximate Weight Shipping Installed |           |
|-----------|---|--------------------------|------------------------|---------|---------|-----------|---------------------------------------|-----------|
|           |   | (A) Diameter Inches (cm) | (B) Height Inches (cm) |         |         |           | lbs. (kg)                             | lbs. (kg) |
| 4RW       | 4 Qt. Basic Warmer                                    | 8-1/2                    | 10                     | 120V    | 600     | 5-15P     | 9                                     | 6         |
|           |   | (21.5)                   | (25.4)                 | 240V    | 600     | 6-15P     | (4.1)                                 | (2.7)     |
| 4RW-L     | 4 Qt. Warmer w/1 oz. ladle                            | 8-1/2                    | 13-3/4                 | 120V    | 600     | 5-15P     | 11                                    | 8         |
|           |   | (21.5)                   | (34.9)                 | 240V    | 600     | 6-15P     | (4.9)                                 | (3.6)     |
| 4RW-P     | 4 Qt. Warmer w/pump                                   | 8-1/2                    | 16-1/2                 | 120V    | 600     | 5-15P     | 11                                    | 8         |
|           |   | (21.5)                   | (41.9)                 | 240V    | 600     | 6-15P     | (4.9)                                 | (3.6)     |
| 4RW-4H    | 4 Qt. Warmer with hinged lid & bowl (ladle optional)  | 8-1/2                    | 10                     | 120V    | 600     | 5-15P     | 11                                    | 8         |
|           |   | (21.5)                   | (25.4)                 |         |         |           | (4.9)                                 | (3.6)     |
| 7RW       | 7 Qt. Basic Warmer                                    | 9-1/2                    | 10-1/2                 | 120V    | 1100    | 5-15P     | 11                                    | 8         |
|           |   | (24.1)                   | (26.6)                 | 240V    | 1100    | 6-15P     | (4.9)                                 | (3.6)     |
| 7RW-7H    | 7 Qt. Warmer with hinged lid & bowl (ladle optional)  | 9-1/2                    | 10-1/2                 | 120V    | 1100    | 5-15P     | 11                                    | 8         |
|           |   | (24.1)                   | (26.6)                 |         |         |           | (4.9)                                 | (3.6)     |
| 11RW      | 11 Qt. Basic Warmer                                   | 11-3/4                   | 11-3/4                 | 120V    | 1600    | 5-15P     | 13                                    | 10        |
|           |   | (29.8)                   | (29.8)                 | 240V    | 1600    | 6-15P     | (5.9)                                 | (4.5)     |
| 11RW-11H  | 11 Qt. Warmer with hinged lid & bowl (ladle optional) | 11-3/4                   | 11-3/4                 | 120V    | 1600    | 5-15P     | 13                                    | 10        |
|           |   | (29.8)                   | (29.8)                 |         |         |           | (5.9)                                 | (4.5)     |
| 11RW-P    | 11 Qt. Warmer w/pump                                  | 11-3/4                   | 17-1/2                 | 120V    | 1600    | 5-15P     | 13                                    | 15        |
|           |   | (29.8)                   | (44.4)                 | 240V    | 1600    | 6-15P     | (5.9)                                 | (4.5)     |

#### Typical Specifications

Warmer has a one piece spot welded stainless steel body. A stainless steel heat well is standard. A wrap around heating element is attached to the heat well for maximum performance. An adjustable thermostat with a "positive off" is provided and a hi-limit safety thermostat is standard. Unit comes complete with 4 non-skid feet and a 6 ft. lead in cord with plug. Unit is UL and UL Sanitation (approved to NSF Std #4) and CUL approved. Printed in the U.S.A.

Star Manufacturing International Inc. - 10 Sunnen Drive - P.O. Box 430129 - St. Louis, MO 63143-3800

Phone: (800) 264-7827 - FAX: (800) 264-6666 - [www.star-mfg.com](http://www.star-mfg.com)