



2 & 4 SLICE POP-UP TOASTERS Models STO2, STO4 & STO4H

Features/Benefits:

- ★ Star's Pop-Up toasters will toast your bagels, breads, buns or any menu item to perfection.
- ★ Available in 2 & 4 slice design to accommodate any volume foodservice operation.
- ★ Ribbon style elements provide fast and consistent toasting.
- ★ Unique bun/toast switch to allow the operator to toast one or both sides of product.
- ★ Extra wide slots for toasting bagels or Texas toast.
- ★ Electronic timer for consistent and quality toasting every cycle.
- ★ STO2 and STO4 are standard with 120 volt, 15 amp plug and can operate almost anywhere.
- ★ Production ranges from 150 slices per hour for two slice toasters and 250 slices per hour for four slice toasters.
- ★ Slot openings are 1-1/4" wide and 5-1/4" long.



Model STO2

Applications:

From cafes and lunch counters to high volume restaurants, Star has a toaster to match the demands of any operation. Ideal for self serve operations, convenience stores, fast food chains or any place you want to enhance your menu.

Quality Construction:

Star's 2 and 4 slice toasters feature stainless steel body, ribbon style elements and crumb tray. Dual thermostats and adjustable color control for each bank of two slot openings. Toasters come complete with 3' lead in cord and molded plug.

Warranty:

Toasters are covered by Star's one year parts and labor warranty.



Model STO4






Star Manufacturing International, Inc.

Pop-Up Toasters 2 & 4 Slice Standard

2 & 4 SLICE POP-UP TOASTERS

Models *STO2, STO4 & STO4H*

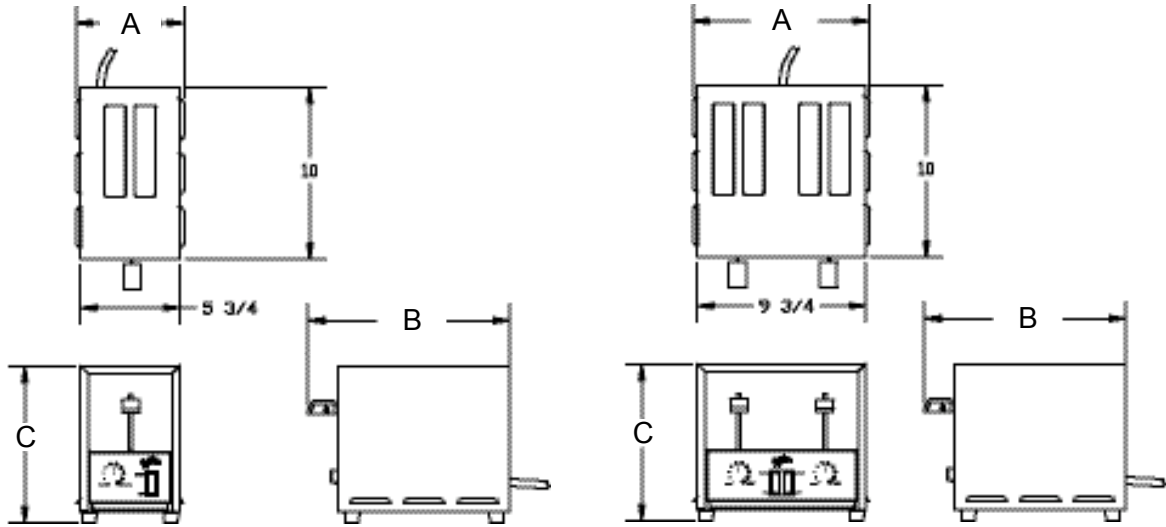

Model Specifications

Model No.	Description	Dimensions			NEMA	Voltage	Wattage	Amps	Approximate Weight	
		A Width Inches (cm)	B Depth Inches (cm)	C Height Inches (cm)					Shipping lbs. (kg)	Installed lbs. (kg)
STO2	Two Slot Pop-Up Toaster	6 (15.2)	10 (25.4)	9 (22.9)	5-15P	120	900	7.5 (5.4)	12 (4.1)	9
STO4	Four Slot Pop-Up Toaster	10-1/8 (25.7)	10 (25.4)	9-1/16 (23)	5-15P	120	1,800	15	17 (7.7)	13 (5.9)
					5-20P*	120	1,800	15		
STO4H	Four Slot Pop-Up Toaster, High Performance	10-1/8 (25.7)	10 (25.4)	9-1/16 (23)	6-15P	208(or) 240	2,400 2,400	11.5 10	17 (7.7)	13 (5.9)

*Canadian Requirement

Typical Specifications

Toasters have a highly polished stainless steel body with 2 or 4 slot openings from 1-3/16" wide and 5-1/4" long. A large removable crumb tray is standard. Toasters have dual thermostats and an adjustable color control for each bank of 2 slot openings. Elements are unique ribbon element design. Toasters are 15 amps. Toasters have a lighted switch for buns or toast. Toasters have the option to toast on one side for buns or two sides for toast. Toasters come complete with a 3 foot lead in cord with molded plug (NEMA #5-15P, 120V, 5-20P on STO4-CUL and 6-15P, 240V). Toasters are listed by UL, CUL and UL-Sanitation to NSF Standard #4. U.S. patented No, 6,205,910. Printed in the U.S.A.

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While Star Manufacturing exercises good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.

Star Manufacturing International Inc. - 10 Sunnen Drive - P.O. Box 430129 - St. Louis, MO 63143-3800

Phone: (800) 264-7827 - FAX: (800) 264-6666 - www.star-mfg.com