



Job _____ Item No. _____

Grill-Max® Express Roller Grills

Grill with Chrome Coating X30 X50 X75

Grill with Duratec Coating X30S X50S X75S

Drawer Bun Warmer XBW30 XBW50



X30S with XBW30

DESCRIPTION

Star Grill-Max® Express roller grills combine high quality and lasting performance with the a compact design—providing an unmatched pairing of flexibility and durability. Roller grills are available in a variety of sizes and are perfect for snack bars, convenience stores, recreational facilities, stadiums, and virtually any other food service application.

SPECIFICATIONS

ROLLER GRILLS—Grill-Max® Express roller grills will be made of stainless steel panels and utilize either Duratec® non-stick coated rollers or chrome roller. Elements will be mounted in a fixed and floating system allowing for lateral expansion to minimize warping. Infinite temperature controls will control heating of the front 6 rollers [as a set] and rear 5 rollers [as a set] independently. The unit will use a heavy-duty motor and provides full rotation of rollers. The rollers will be aligned in a “stadium seating” style arrangement with a slope of 3–5 degrees depending on model. The units will utilize a pilot lamp for each heating zone.

ALL UNITS—Units will come with a 6 ft. (1.83 m) cord with an appropriate plug for the voltage and amperage of that unit.

WARRANTY

This unit comes with a one [1] year warranty for parts and labor.

FEATURES

- Slim design offers maximum grill space with a minimum footprint
- Chrome or optional Duratec non-stick coatings offer increased durability
- Durable roller bearing design for longer life, smoother operation, and minimal grease-free maintenance
- Sectional, dual-zone infinite controls for front and rear rollers for optimal performance and flexibility
- Angled configuration for attractive presentation and easier access

OPTIONS & ACCESSORIES

- Roller coatings—chrome or Duratec
- Polycarbonate or glass sneeze guards [see sheet 2M-Z21566]

CERTIFICATIONS



STAR MANUFACTURING INTERNATIONAL INC.

265 Hobson St. • Smithville, Tennessee 37166
Telephone 800 264 7827 • Fax 314 781 5445
www.star-mfg.com



Printed in the U.S.A. • 2M-Z22389 • Rev - • 07.2017
Specifications are subject to change without notice and are not intended for installation purposes.




Grill-Max® Express Roller Grills

Grill with Chrome Coating X30 X50 X75

Grill with Duratec Coating X30S X50S X75S

Drawer Bun Warmer XBW30 XBW50


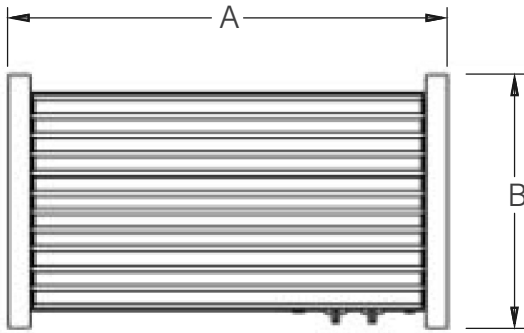


POWER CORD

The power cord exits the bottom of the case approximately 5.125 inches (130 mm) from the right side edge and 2 inches (51 mm) from the rear of the unit.

LEG OFFSET

The legs are set in 0.75 inch (19 mm) from the left and right side and 2.75 inches (70 mm) from the front and back of the unit.

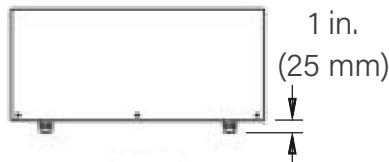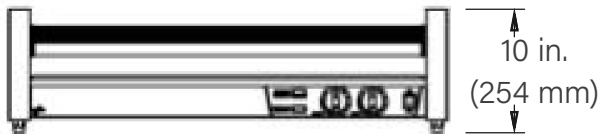

ROLLER GRILLS

HOT DOG CAPACITY	HEIGHT in. (mm)	WIDTH [A] in. (mm)	DEPTH [B] in. (mm)	VOLTS	Hz	AMPS	WATTS	NEMA PLUG	APPROX. SHIP WEIGHT	APPROX. INSTALL WEIGHT
30	10.0 (254)	23.75 (603)	20.63 (523)	120 V 230 V	60 50	9.6 5	1,150	5-15P CEE 7/7	54 lb. (24.1 kg)	47 lb. (21.3 kg)
50	10.0 (254)	35.75 (603)	20.63 (523)	120 V 230 V 230 V	60 50 60	12.8 6.7 6.7	1,535	5-15P ¹ CEE 7/7 CEE 7/7	69 lb. (31.3 kg)	59 lb. (26.8 kg)
75	10.0 (254)	35.75 (908)	28.5 (724)	120 V 230 V 240 V	60 60 60	14.4 9.6 10.0	1,730 2,210 2,400	5-15P ¹ CEE 7/7 6-15P	108 lb. (49.0 kg)	79 lb. (35.8 kg)



5-15P



5-20P



6-15P



CEE7/7

BUN WARMERS

MODEL	DESCRIPTION	HEIGHT in. (mm)	WIDTH in. (mm)	DEPTH in. (mm)	VOLTS	AMPS	WATTS	NEMA PLUG	APPROX. SHIP WEIGHT	APPROX. INSTALL WEIGHT
XBW30	fits X30 models 72 bun capacity	6.25 (159)	23.75 (603)	20.6 (523)	120 V 230 V	0.3 0.2	35 50	5-15P CEE 7/7	44 lb. (20 kg)	38 lb. (17.2 kg)
XBW50	fits X50 and X75 ² models 96 bun capacity	6.25 (159)	35.75 (603)	20.6 (523)	120 V 230V	0.4 0.3	50 70	5-15P CEE 7/7	59 lb. (26.8 kg)	52 lb. (23.6 kg)

¹not cUL certified ²optional shelf accessory [part number X75BWS] required to accommodate 75 hot dog capacity units

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While Star Manufacturing exercises good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.



STAR MANUFACTURING INTERNATIONAL INC.

265 Hobson St. • Smithville, Tennessee 37166

Telephone 800 264 7827 • Fax 314 781 5445

www.star-mfg.com

Printed in the U.S.A. • 2M-Z22389 • Rev - • 07.2017

Please refer to the owner's manual for information regarding installation or use.