


# RESTAURANT



Without Manufacturers Product Approval from the Massachusetts Board of State Examiners of Plumbers and Gasfitters


## Grease Interceptors

- \* Injection molded in high quality thermoplastics.
- \* New quick-connect latching system and removable baffles allows for easy cleaning.
- \* Recess extension risers are available.
- \* 10 yr. extended warranty.



### 3925A02LO LO-PRO

Based on the same dimensional footprint as our successful 35gpm and 50gpm models, this latest 25gpm addition has an overall height of just 11 inches, and still meets the requirements of ASME A112.14.3.

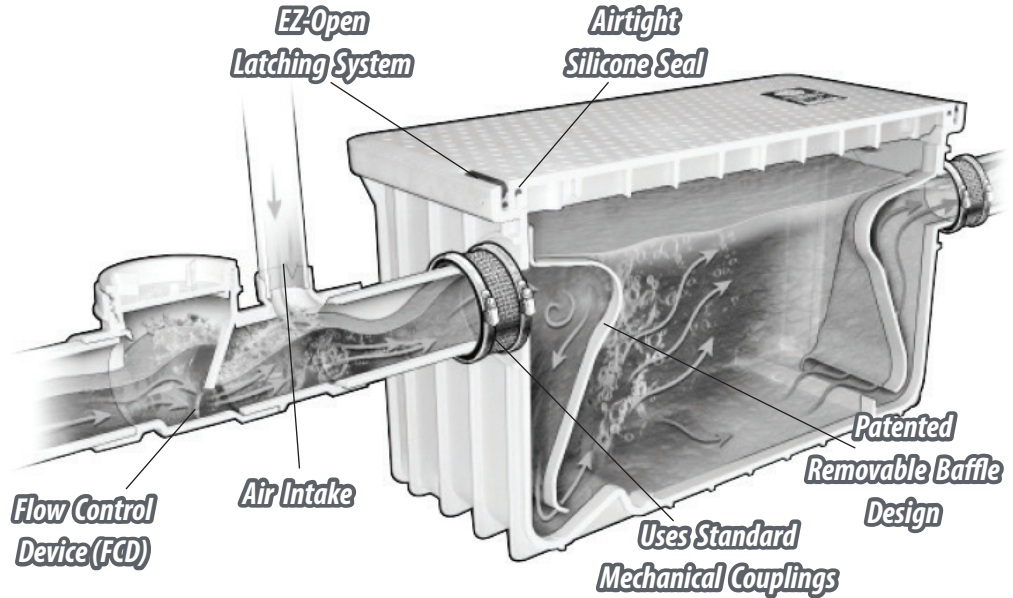

Restaurant (48~51)

Order No.	Size G.P.M./ lbs	Connection Size	Flow Rate GPM (LPS)	Actual Grease Capacity	Shipping Weight	Dimension L" x W" x H"	Pack/ case
3915A02C	15/30	2"	15 g.p.m. (0.94 liters/sec)	40.97 lbs. (18.58 kg)	22.1 lbs. (10 kg)	14.5" x 17.5" x 16.3"	1
3920A02	20/40	2"	20 g.p.m. (1.26 liters/sec)	76.4 lbs. (34.65 kg)	25 lbs. (11 kg)	23.6" x 17.5" x 16.3"	1
3925A02LO	25/50	2"	25 g.p.m. (1.58 liters/sec)	53 lbs. (24.22 kg)	45 lbs. (20 kg)	31" x 23.5" x 11"	1
3925XTA03	25/50	3"	25 g.p.m. (1.58 liters/sec)	73.01 lbs. (33.11 kg)	37.77 lbs. (17.13 kg)	31.25" x 18.5" x 12"	1
3935A03	35/70	3"	35 g.p.m. (2.21 liters/sec)	139 lbs. (62.8 kg)	54 lbs. (25 kg)	31" x 23.5" x 17.5"	1
3935A04	35/70	4"	35 g.p.m. (2.2 liters/sec)	139 lbs. (62.8 kg)	57 lbs. (26 kg)	31" x 23.5" x 17.5"	1
3950A03	50/100	3"	50 g.p.m. (3.15 liters/sec)	122 lbs. (55.3 kg)	65 lbs. (30 kg)	31" x 23.5" x 23.5"	1
3950A04	50/100	4"	50 g.p.m. (3.15 liters/sec)	122 lbs. (55.3 kg)	70 lbs. (32 kg)	31" x 23.5" x 23.5"	1

## Grease Interceptor Extension Kits

\* **3920AX6** A=23.6", B=7. Shipping Wt. =9.92 lbs/4.5 kgs  
Use for 3915A02C, 3920A02, 3925A03

\* **3935AX6** A=31", B=7. Shipping Wt. =24.25 lbs/11 kgs  
Use for 3935A03, 3935A04, 3950A03, 3950A04

