

BUFFET DISPLAY TABLES

100% FRONT BREATHING SYSTEM



JBT-36



JBT-60



JBT-48



JBT-48



- Decorative back panel, attached for cosmetic purpose only
(Not a factory option)

≡ FEATURES & BENEFITS ≡

■ HOT GAS CONDENSATE SYSTEM

Through Turbo Air's creative innovation, the condensate system surfaces have been specially treated to resist corrosion. This not only increases efficiency without the risk of refrigerant leakage from corrosion, but also prevents the overflow of condensate water.

■ SIDE MOUNT COMPRESSOR UNIT

Through positioning the compressor to the side, the refrigerator can be serviced without being moved. By innovatively creating a **front breathing** feature, this model can provide high efficiency in narrow spaces.

■ EFFICIENT REFRIGERATION SYSTEM

Turbo Air's solid door refrigerators are designed with oversized and balanced (CFC Free R-134A) refrigeration systems. These include efficient evaporators and condensers for faster cooling and greater efficiency.

■ EXTERIOR & INTERIOR OF THE CABINET

The Turbo Air J series boasts a stainless steel exterior (galvanized steel back and bottom). Interior is stainless steel floor with AL sides, back and AL door liners. It guarantees the utmost in cleanliness and long product life. It can add a touch of style to the most refined setting.

■ HIGH-DENSITY POLYURETHANE INSULATION

The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.

■ MAGNETIC DOOR GASKETS

Magnetic door gaskets are of one piece construction, removable without tools for ease of cleaning and replacement.

■ SNEEZE GUARD SOLD SEPARATELY (OPTIONAL)

■ ADJUSTABLE, HEAVY DUTY, PE(POLYETHYLENE) COATED WIRE SHELVES

■ ERGONOMICALLY DESIGNED DOORS

Customers' fatigue fades away with easy grip handles and doors that open effortlessly. These features along with self-closing doors make this the ultimate choice in customer convenience.

■ REFRIGERATOR HOLDS 33°F ~ 39°F FOR THE BEST IN FOOD PRESERVATION

Model	Swing Door	CU./FT.	#of Shelves	#of Pans (1/3)	HP	AMPS	Crated Weight (lbs.)	L x D x H* (inches)
JBT-36	1	7.5	1	6	1/4	6.6	171	35 ³ / ₈ x 27 ¹ / ₂ x 28 ³ / ₄
JBT-48	2	11	2	9	1/4	6.6	200	47 ¹ / ₄ x 27 ¹ / ₂ x 28 ³ / ₄
JBT-60	2	15	2	12	1/3	8.9	235	59 x 27 ¹ / ₂ x 28 ³ / ₄
JBT-72	3	18	3	15	1/3	9.9	279	70 ⁷ / ₈ x 27 ¹ / ₂ x 28 ³ / ₄

* Height does not include 5-7/8" for caster height.


JBT MODELS SPECIFICATIONS

ELECTRICAL DATA	JBT-36	JBT-48	JBT-60	JBT-72
Voltage	115/60/1	115/60/1	115/60/1	115/60/1
Plug Type	Ⓢ NEMA-5-15P	Ⓢ NEMA-5-15P	Ⓢ NEMA-5-15P	Ⓢ NEMA-5-15P
Full Load Amperes	6.6	6.6	8.9	9.9
Compressor HP	1/4	1/4	1/3	1/3
Cord Length ft.	9.2	9.2	9.2	9.2
Refrigerant	R-134A	R-134A	R-134A	R-134A
DIMENSIONAL DATA				
Ext. Length Overall in.	35 ³ / ₈ (899mm)	47 ¹ / ₄ (1200mm)	59 (1499mm)	70 ⁷ / ₈ (1782mm)
Ext. Depth Overall in.	27 ¹ / ₂ (698mm)	27 ¹ / ₂ (698mm)	27 ¹ / ₂ (698mm)	27 ¹ / ₂ (698mm)
Ext. Height Overall in.*	28 ³ / ₄ (730mm)	28 ³ / ₄ (730mm)	28 ³ / ₄ (730mm)	28 ³ / ₄ (730mm)
# of Doors	1	2	2	3
# of Shelves	1	2	2	3
# of Pans	6	9	12	15
Net Capacity cu. ft.	7.5	11	15	18
Gross Weight lbs.	171	200	235	279
Net Weight lbs.	152	179	200	234

Design and specifications subject to change without notice.
 Actual shipping weight may differ due to extra packing materials for product protection.
 * Height does not include 5-7/8" for caster height.

■ **WARRANTY : 1 Year Parts and Labor Warranty**
Additional 4 Year Warranty on Compressor

- SELF-CONTAINED SYSTEM
- 4" DIA. CASTERS ARE STANDARD
- 1/3 SIZE CONDIMENT PANS INCLUDED
- 2.5" DIA. CASTERS AVAILABLE (OPTIONAL)
- LEGS AVAILABLE FOR ALL MODELS (OPTIONAL)
- SNEEZE GUARD AVAILABLE (OPTIONAL)

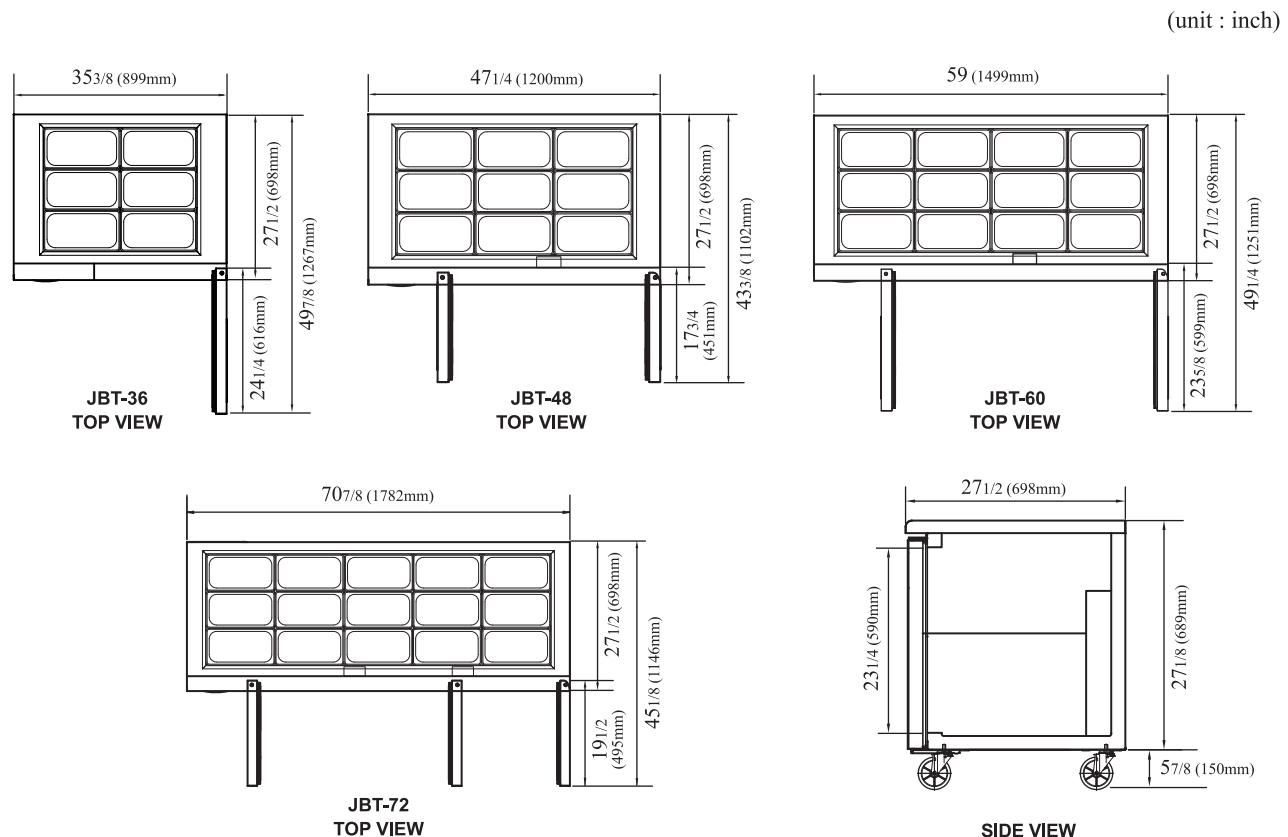

PLAN VIEW