



Project _____

Item No. _____

Quantity _____

COUNTERTOP DOUBLE BURNER (HOB) COOKTOP Front-to-Back with Standard Controls



FEATURES

- Models available in 5,000 (2,500/burner); 6,000 (3,000/burner); 7,000 (3,500/burner) watts
- Portable design with stainless steel housing
- Easy-to-clean high-temperature glass-ceramic top
- High-quality internal electronics and heavy gauge Litz wire
- Individual controls for each burner (hob) for independent operation and functionality
- LED display
- Automatic pan detection allows for instant energy transmission to pan
- Even heat distribution across bottom of cookware
- Programmed with 22 temperature settings and 20 power cook settings
- Automatic shut-off feature prohibits overheating
- Temperature range from 85°F–500°F (29°C–260°C)
- Microprocessor monitors vital components to check for overheating, power supply issues, and more
- Integral fan keeps internal components cool
- Available in 200–240 VAC, single phase
- Includes plug and cord (6 ft. nominal)
- Two-year advanced replacement warranty – U.S. and Canada

PERFORMANCE



The CookTek® Countertop Double Burner (Hob) Cooktop with Standard Controls is a portable countertop design with stainless steel housing and a glass-ceramic cooktop intended for use in commercial kitchens and restaurants. An automatic shut-off feature, integral cooling fan, and self-diagnosing microprocessor allow for a safe kitchen environment. Each unit is equipped with 22 temperature settings and 20 power cook settings to ensure maximum and efficient heating of any induction-compatible pan.*

CERTIFICATIONS



*Induction cooking requires the use of induction-compatible (i.e. magnetic) cookware.

It is the owner and installer's responsibility to comply with all local codes. CookTek reserves the right to make substitutions of components or change specifications without prior notice.

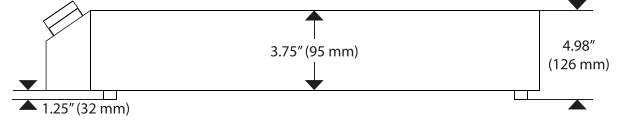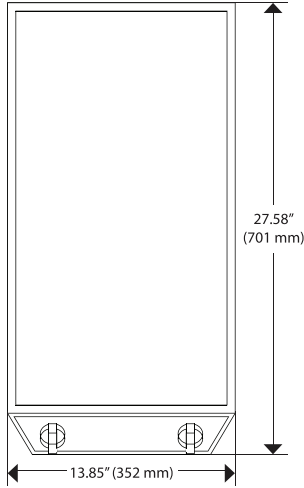

DIMENSIONS			
Full Unit Height	4.98"	126 mm	
Housing Height	3.75"	95 mm	
Full Unit Width	13.85"	352 mm	
Full Unit Depth	27.58"	701 mm	
Feet Height	1.25"	32 mm	
Weight	31 lb.	14.0 kg	
Max Ambient Temperature	122°F	50°C	
WALL CLEARANCE			
Front	2"	51 mm	
Sides	2"	51 mm	
Rear	2"	51 mm	
SHIPPING INFORMATION			
Packaged Height	11"	279 mm	
Packaged Width	23"	584 mm	
Packaged Depth	32"	813 mm	
Packaged Weight	45 lb.	20.4 kg	
Item Class	250 NMFC #26710		
ELECTRICAL SPECIFICATIONS (SINGLE PHASE)			
UNITED STATES/CANADA			
MC2502F	601501	200–240 V, 50/60 Hz, 22 A, 5,000 W (100–2,500 W/burner)	NEMA 6-30P
MC3002F	601601	200–240 V, 50/60 Hz, 26 A, 6,000 W (100–3,000 W/burner)	NEMA 6-50P
MC3502F	601701	200–240 V, 50/60 Hz, 30 A, 7,000 W (100–3,500 W/burner)	NEMA 6-50P
UK AND SAUDI ARABIA			
MC2502F	601502	200–240 V, 50/60 Hz, 22 A, 5,000 W (100–2,500 W/burner)	IEC 309, 32A, 3-pin
MC3002F	601602	200–240 V, 50/60 Hz, 26 A, 6,000 W (100–3,000 W/burner)	IEC 309, 32A, 3-pin
MC3502F	601702	200–240 V, 50/60 Hz, 30 A, 7,000 W (100–3,500 W/burner)	IEC 309, 32A, 3-pin
INTERNATIONAL			
MC2502F	601503	200–240 V, 50/60 Hz, 22 A, 5,000 W (100–2,500 W/burner)	IEC 309, 32A, 3-pin
MC3002F	601603	200–240 V, 50/60 Hz, 26 A, 6,000 W (100–3,000 W/burner)	IEC 309, 32A, 3-pin
MC3502F	601703	200–240 V, 50/60 Hz, 30 A, 7,000 W (100–3,500 W/burner)	IEC 309, 32A, 3-pin

AUSTRALIA			
MC2502F	601504	200–240 V, 50/60 Hz, 22 A, 5,000 W (100–2,500 W/burner)	56PA332, 32A, 250V
MC3002F	601604	200–240 V, 50/60 Hz, 26 A, 6,000 W (100–3,000 W/burner)	56PA332, 32A, 250V
MC3502F	601704	200–240 V, 50/60 Hz, 30 A, 7,000 W (100–3,500 W/burner)	56PA332, 32A, 250V
SOUTH AFRICA			
MC2502F	601507	200–240 V, 50/60 Hz, 22 A, 5,000 W (100–2,500 W/burner)	N/A
MC3002F	601607	200–240 V, 50/60 Hz, 26 A, 6,000 W (100–3,000 W/burner)	IEC 309, 32A, 3-pin
MC3502F	601707	200–240 V, 50/60 Hz, 30 A, 7,000 W (100–3,500 W/burner)	IEC 309, 32A, 3-pin
ISRAEL			
MC2502F	601508	200–240 V, 50/60 Hz, 22 A, 5,000 W (100–2,500 W/burner)	IEC 309, 32A, 3-pin
MC3002F	601608	200–240 V, 50/60 Hz, 26 A, 6,000 W (100–3,000 W/burner)	IEC 309, 32A, 3-pin
MC3502F	601708	200–240 V, 50/60 Hz, 30 A, 7,000 W (100–3,500 W/burner)	IEC 309, 32A, 3-pin

Dedicated circuit required for each installation.



NEMA 6-30P



IEC 309, 32A, 3-pin



NEMA 6-50P



56PA332, 32A, 250V

Global Operations

2801 Trade Center Drive / Carrollton, Texas 75007 USA
 US: 800.90TURBO (800.908.8726) / International: +1 214.379.6000
 Fax: +1 214.379.6073 / www.cooktek.com