



STACKED STAND-MOUNTED STEAM'N'HOLD™

Two [2] Stacked, Stand-Mounted 3 Pan, Electric Heated, Vacuum Capable, Connectionless Countertop Steamers

Short Specification

Steamer shall be two [2] **AccuTemp STEAM'N'HOLDS** Model Specify:

Volt	6 kW	8 kW	12 kW
208	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
240	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
480	N/A	N/A	N/A

each unit with 3 [2½" deep] pan capacity, vacuum pump and reinforced cooking chamber capable of making steam and cooking at temperatures between 150–212°F (66–100°C) and holding foods at temperatures between 100–200°F (38–93°C). Steam to be produced inside cooking compartment with NO water or drain connection required. Doors to have easy-open, heavy duty refrigerator type handle. Steamers to include low-water warning and auto-shutdown system. Units to be NSF and U.L. listed and manufactured in the U.S.A.

Construction Features

- 14 gauge reinforced stainless steel steamer cavities
- Insulated cavities and double panel doors
- Heavy refrigeration style door handles with magnetic latches and quick vacuum release system
- Front mounted manual water reservoir drain valves
- Left side mounted control panels with smudge resistant overlay
- Removable stainless steel "L" brackets provided and positioned to support 1, 2½, 4 or 6" deep steamer pans

Performance Features

- Vacuum pump capable of pulling 23 inches of mercury vacuum in cooking compartment.
- Choice of Power Input to match cooking requirements
- Accurate thermostat control of steam temperature between 150–212°F (66–100°C).
- Food holding capability with accurate temperature control between 100–200°F (38–93°C).
- Low watt density heating element external to compartment and not exposed to water

- Full three gallon capacity water reservoir provides hours of steaming capability without refilling
- Optional Heavy duty stainless steel support stand with adjustable unit height: [Specify: Standard or Ergo-Low Height].

Standard Control Features

- Power ON and OFF buttons
- Power-On, Heat, and Cook & Hold mode indicator lights
- Low-water protection system with dual sensors, warning light and auto-shutdown
- Vacuum and cook Temperature gauges
- Your choice of: 90 minute timer [Type 3 Controls] 180 minute timer [Type 4 Controls]
- Continuous Cook and Hold settings on Timer Dial
- Fast Cook [212°F/100°C] or Slow Cook [under vacuum] Switch
- 100–200°F (38–93°C) thermostat for low-temp/vacuum cooking

Cooking Capacity & Applications

- Pan Capacity (per steamer) [12 X 20"]:

Pan Size	Number of Pans	2 oz.* Portions	4 oz.* Portions	6 oz.* Portions	8 oz.* Portions
2-1/2"	3	384	192	128	96
4"	2	448	224	149	112
6"	1	576	288	192	144

* Total Liquid Portions, all pans

Applications

- Fresh or frozen vegetables
- Fresh or frozen seafood
- Starches including rice, pasta, potatoes and beans
- Meats including poultry, hamburgers, hotdogs, sausage

Reheating

- Vendor prepared foods
- Cook-Chill foods
- Freshening bakery goods

Holding

- Any steamed item listed above
- Foods prepared in other equipment

Approvals

- Steamer to be NSF Listed as both steamer & holding cabinet
- Steamer to be U.L. Listed
- Steamer to be ENERGY STAR qualified



Installation Requirements

- 208/3 240/3 480/3 Power Source
 - 240/1 [6 kW unit only]
 - 208/1 [6 kW unit only]
- [See other side for AMP requirements]
- 5' power cord with plug comes standard
- [See other side for plug configuration]
- * NO drain line required
 - * NO water line required
 - * NO water treatment system required
 - * NO deliming or descaling required

Options & Accessories:

- Stainless steel support stand
- Hinged-left/open-left door
- Factory pre-set temperature - Control behind panel [Chain Package – Type 1 Control]
- Correctional Package
- 4" deep bottom drain pan
- Bullet Feet




S3 Models shown with 4" drain pan (optional), and stainless steel support stand (optional).

MM4203-0505




STACKED STAND-MOUNTED STEAM'N'HOLD™

Two [2] Stacked, Stand-Mounted 3 Pan, Electric Heated, Vacuum Capable, Connectionless Countertop Steamers

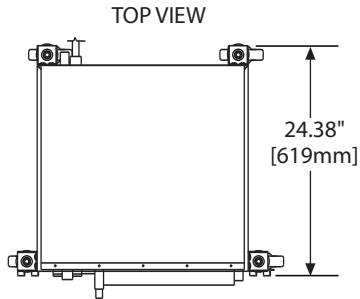

Steamer Model "D" Specifications								
Model #	208D6-000	240D6-000	208D8-000	240D8-000	240D12-000	208D12-000	440D8-000	480D12-000
Volts AC	208	240	208	240	240	208	440	480
Phase	1	1	3	3	3	3	3	3
Amps	28.9	25.0	22.2	19.2	28.9	33.3	11.4	10.7
Watts	6 kW	6 kW	8 kW	8 kW	12 kW	12 kW	9.5 kW	10.7 kW
NEMA Plug	L6-30P	L6-30P	L15-30P	L15-30P	L15-30P	15-50P	L16-20P	L16-20P
Receptacle Type								

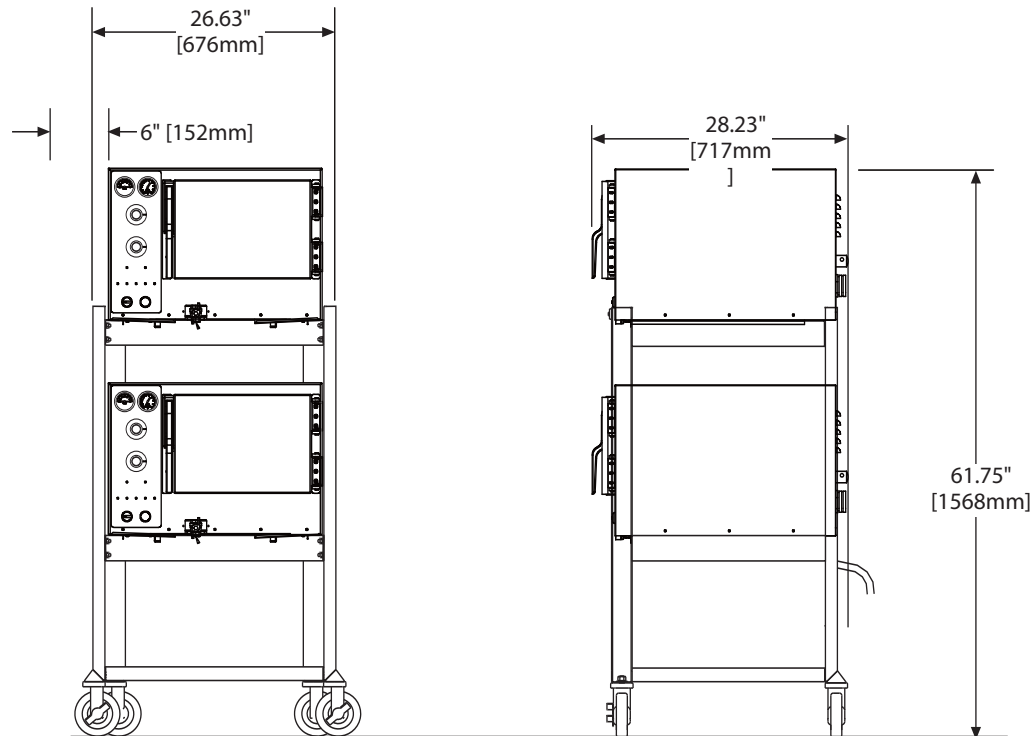

Notes:

1. Allow 6" between fryer, ranges and other hot surfaces side as shown.
2. 5 foot power cord supplied with single and 3 phase units.
3. For use on individual branch circuit only
4. Do not connect to a circuit operating at more than 150V to ground.
5. Dimensions in brackets are metric.

S3 Models shown with 4" drain pan (optional), and stainless steel support stand (optional).



MM4203-0505