



BEVERAGE-AIR

3779 Champion Blvd., Winston-Salem, NC 27105
1-888-845-9800 Fax# 1-336-245-6453
<http://www.Beverage-Air.com>

CUSTOMER'S CHOICE FOR A *HOT* LOCATION
Tested & Certified to Ambient Class of 100°F

3 Year Parts/Labor Warranty **Additional 2 Year Compressor Warranty**

DIRECT DRAW DISPENSERS

Direct Draw Beer Dispensers are available in 6 self-contained models up to 5 kegs capacity. Three models are available as club top (DD50C, DD58C, DD68C) for glasses, cans or bottles storage beneath an easy glide stainless steel lid. Two remote models (DD58R and DD78R) complete the series of direct draws.

CABINET CONSTRUCTION

Standard, cabinet exterior construction includes attractive, wear resistant vinyl on steel in black exterior finish. Top is made from heavy-duty stainless steel including drip tray(s) for easy cleaning.

Doors are self-closing and include key locks. Magnetic gaskets provide positive door sealing.

Standard interior construction utilizes galvanized steel walls and ceiling. Reinforced floor and door sills are made from heavy-duty stainless steel to provide long lasting service.

Foamed-in-place CFC and HCFC-free polyurethane insulation enhances the structural strength of the cabinet and helps increase energy efficiency.

Three-inch (3") insulated towers are provided. Towers are adapted to have a continuous source of cold air channeled into it to keep beer at its coldest, best quality the moment it is dispensed.

Drain tube located at bottom front of cooler for connection to floor drain.

REFRIGERATION

Models feature forced air refrigeration to keep beer in kegs ice cold for dispensing. Refrigeration system uses R134a refrigerant, which is CFC and HCFC-free for compliance with environmental safety concerns.

ELECTRICAL

Units wired at factory and ready for connection to a 115/60/1 phase, 15 amp dedicated outlet. 8' long cord and plug set included.

SPECIAL FEATURES

- Stainless options available
- 3 Club Top models available
- Drain tube located at bottom front of cooler for connection to floor drain.

Item No. _____
Quantity _____

DRAFT BEER EQUIPMENT **DIRECT DRAW DISPENSERS** **DD SERIES**

MODELS:
DD24
DD50/DD50C
DD58/DD58C/DD58R
DD68/DD68C
DD78/DD78R
DD94



DD50



DD68C



DD94

Available From:



*Note: Not all markings may apply to all model variations.

Model Specified _____

Store# _____

Location _____

Quantity _____



BEVERAGE-AIR

Direct Draw Dispensers

Models: DD24, DD50, DD50C, DD58, DD58C, DD58R, DD68, DD68C, DD78, DD78R, DD94


ELECTRICAL CONNECTION

Units pre-wired at factory and include 8' long cord and plug set.




115/60/1
NEMA-5-15P

PLAN VIEWS




FRONT

DD24




FRONT VIEW

DD50

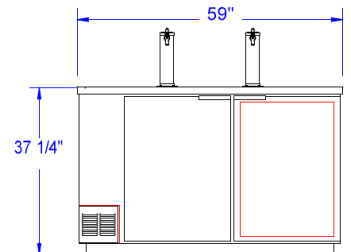


FRONT VIEW

DD58

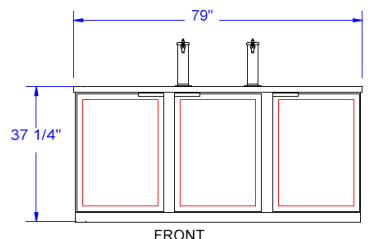

FRONT

DD78

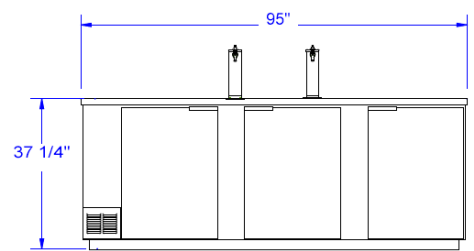

FRONT


DD94

MODEL	DD24	DD50	DD50C	DD58	DD58C	DD58R	DD68	DD68C	DD78	DD78R	DD94
EXTERNAL DIMENSIONAL											
Length Overall (inches)	24"	50 1/2"	50 1/2"	59"	59"	59"	69"	69"	79"	79"	95"
Length Overall (mm)	610	1283	1283	1499	1499	1499	1753	1753	2007	2007	2413
Depth Overall (inches)	29 1/2"	28 3/16"	28 3/16"	28 3/16"	28 3/16"	28 3/16"	28 3/16"	28 3/16"	28 3/16"	28 3/16"	28 3/16"
Depth Overall (mm)	749	716	716	716	716	716	716	716	716	716	716
Height Overall— (inches)	37 3/4"	37 1/4"	38 3/4"	37 1/4"	38 3/4"	37 1/4"	37 1/4"	38 3/4"	37 1/4"	37 1/4"	37 1/4"
Height Overall— (mm)	959	946	984	946	984	946	946	984	946	946	946
Depth with door open (inches)	46 3/4"	46 3/4"	46 3/4"	50 9/16"	50 9/16"	50 9/16"	50 9/16"	50 9/16"	50 9/16"	50 9/16"	50 9/16"
Number of doors	1	2	2	2	2	2	2	2	3	3	3
INTERNAL DIMENSIONAL											
NET Capacity (cubic ft.)	7.8	19.8	19.8	23.8	23.8	23.8	28.4	28.4	34.2	34.2	39.7
NET Capacity (Liters)	221	561	561	674	674	674	804	804	968	968	1110
Internal Length Overall (inches)	19"	46 1/2"	46 1/2"	55"	55"	55"	65"	65"	75"	75"	91"
Internal Length Overall (mm)	483	1181	1181	1397	1397	1397	1651	1651	1905	1905	2316
Internal Depth Overall (inches)	23 3/4"	23"	23"	23"	23"	23"	23"	23"	23"	23"	23"
Internal Depth Overall (mm)	603	584	584	584	584	584	584	584	584	584	584
Internal Height Overall (inches)	29 1/2"	32"	32"	32"	32"	32"	32"	32"	32"	32"	32"
Internal Height Overall (mm)	749	813	813	813	813	813	813	813	813	813	813
Number of Kegs (1/2 barrel)	1	2	2	3	3	3	3	3	4	5	5
ELECTRICAL DATA											
Full Load Amperes 115/60/1	4.0	7.4	7.4	7.4	7.4	.5	7.4	7.4	7.4	.5	7.4
ENERGY CONSUMPTION											
	N/A	3.69	3.69	4.37	4.37	n/a*	3.55	3.55	4.02	n/a*	4.8
REFRIGERATION DATA											
Horsepower	1/5	1/3	1/3	1/3	1/3	remote	1/3	1/3	1/3	remote	1/3
WEIGHT DATA											
Gross Weight (Crated lbs)	180	314	330	343	368	298	370	414	417	386	458
Gross Weight (Crated kg)	82	142	150	156	167	135	168	188	189	175	208




*Note: Not all markings may apply to all model variations.

*N/A: Not available at time of printing.



END VIEW

COMMON END VIEW

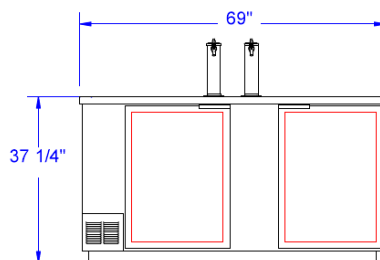

FRONT

DD68

BEVERAGE-AIR® CORPORATION

3779 Champion Blvd. • Winston-Salem, NC 27105 USA • (336) 245-6400 • Fax (336) 245-6453 • (888) 845-9800 • www.beverage-air.com

Specifications are subject to change without prior notice. 05/13