



Modular Holding Cabinet

Project _____

Item _____

Quantity _____

CSI Section 11400

Approved _____

Date _____

Modular Holding Cabinet

Models

- 86007 Left side control, 120 volt modular holding cabinet
- 86007-CE Left side control, 230 volt modular holding cabinet
- 86009 Right side control, 120 volt modular holding cabinet
- 86009-CE Right side control, 230 volt modular holding cabinet



86009

Standard Features

- Conduction heat
- Independent upper and lower heating system
- Cool touch insulation
- Small footprint
- Stainless steel construction
- Digital display
- Programmable menu
- Removable back for pass-through applications
- One year parts and labor warranty

Options & Accessories

- Double handled pan for pass-thru applications
- Under shelf mounting brackets
- Choice of digital control location - available on left or right side

Specifications

Merco Holding Cabinet keeps food hot, fresh and ready for easy assembly! Allows more flexibility in holding options for greater menu variety – go ahead, prepare and hold food prior to serving. Stack the units up to 3 high or line them up side by side. Mounting brackets available for under shelf configurations. The easy to maintain design and simple operation features reduced employee time spent on cleaning and training; increasing customer satisfaction by providing higher product quality in a shorter amount of time.

Conduction Heat: directly transfers heat from both top and bottom with minimal heat loss. Provides consistent quality, improved freshness and extended hold times.

Cool Touch Insulation: keeps exterior surfaces cool while food is held at proper serving temps.

Small Footprint: each unit holds one 1/3 size polycarbonate bin, small footprint allows cabinet to fit almost anywhere.

Modular: stackable up to three high with optional mounting brackets for under shelf mounting (vertically or horizontally) allows operators to customize for any design. Pass-Through Applications - Standard features include removable back for pass-through applications. Double-handled pans optional.

Stainless Steel Construction: sturdy, sanitary and reliable.

Programmable Menu: easy to use symbols on control panel. Digital time and temperature display.

Electrical Requirements: Model is available in 120 Volt; 60 Hz, 360 Watts at 3 Amps. 12' cord and NEMA 5-15P plug included. CE approved units available in 230 Volt, 50 Hz, 360 Watts, at 1.6 amps. 7' cord and BS1363/A plug included.



Models 86007-CE & 86009-CE only



980 S. Isabella Rd.
Mt. Pleasant, Michigan 48858


Phone: 800-733-8948 or 989-773-7981
Fax: 800-669-0619

www.mercoproducts.com





Modular Holding Cabinet

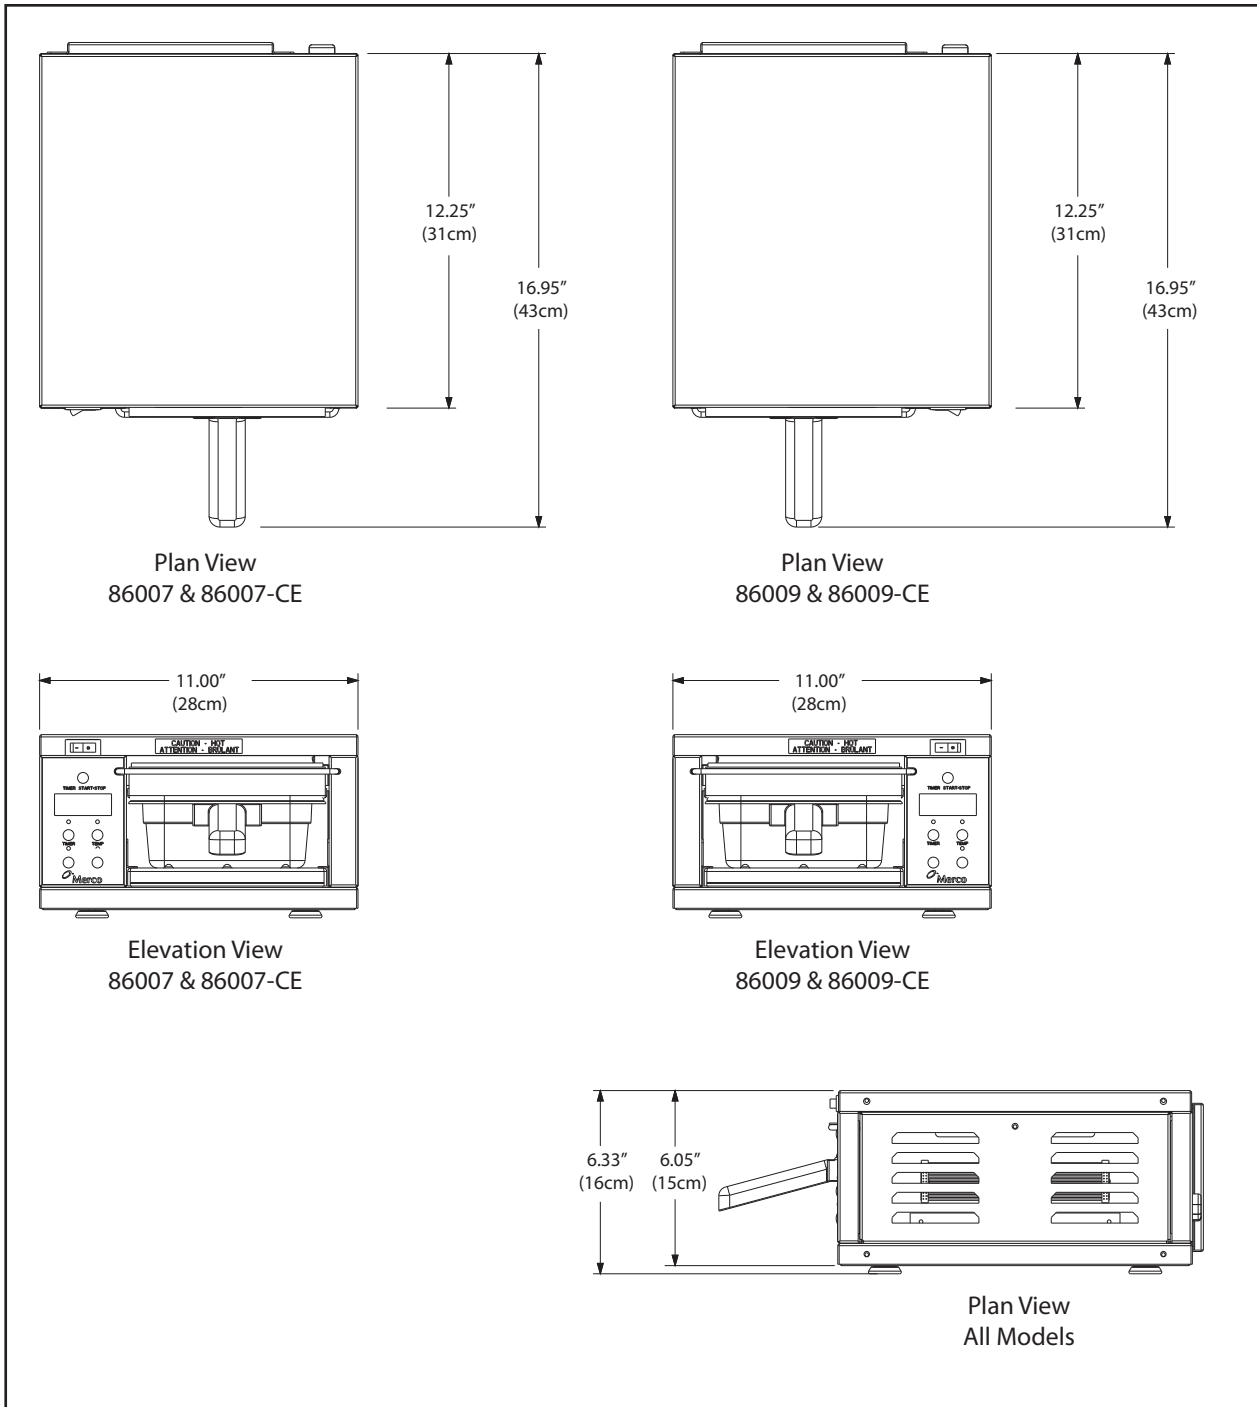

Specifications						
Model	Description	V-Hz-Ph	Amps	Watts	Plug Type	Ship Weight
86007	MHC-1 Left Side Control	120-60-1	3.0	360	NEMA 5-15P	10lbs/5kg
86007-CE	MHC-1 Left Side Control	230-50-1	1.6	360	BS 1363/A	10lbs/5kg
86009	MHC-1 Right Side Control	120-60-1	3.0	360	NEMA 5-15P	10lbs/5kg
86009-CE	MHC-1 Right Side Control	230-50-1	1.6	360	BS 1363/A	10lbs/5kg

Merco reserves the right to make changes to the design or specifications without prior notice.

980 S. Isabella Rd.
Mt. Pleasant, Michigan 48858

Phone: 800-733-8948 or 989-773-7981
Fax: 800-669-0619
www.mercoproducts.com

Printed in the U.S.A.
DSMOMHC1
10/12

