



**air-o-steam®
Electric Combi Oven 61**

ITEM # _____
 MODEL # _____
 PROJECT NAME # _____
 SIS # _____
 AIA # _____



* Base not included

air-o-steam® Electric Combi Oven 61

- 267080 (AOS061EAM1)** EI Combi Oven 61 –
208V/3ph/60Hz - 28A
- 267090 (AOS061EAB1)** EI Combi Oven 61 –
240V/3ph/60Hz - 24.5A

Short Form Specification

Item No. _____

Unit to be Electrolux air-o-steam® Combi Oven AOS061E. The air-o-steam® features three cooking modes – Steam (77 °F-266 °F), Hot convected air (77 °F-572 °F) and Combi-mode (77 °F-482 °F). Each cooking mode operates under Lambda-sensor driven air-o-clima™: automatic and constant real humidity control. 6 point multi sensor for core temperature controlled cooking cycles. Pre-programmed low temperature cooking cycle (LTC) and programmable memory (up to 100, 7-step programs available), 20 factory pre-set cooking programs included. Large LED display for both set and actual values of humidity and temperature in cooking chamber during cooking. All 304 Stainless-steel construction, seamless hygienic cooking chamber with all rounded corners. Double thermo-glazed door with open frame construction for cool outside door panel. Halogen cooking chamber lighting. IPX-5 (NEMA 4) spray water protection certification. Retractable spray hose included as standard.

Air-o-clean, automatic and built-in self-cleaning system.
 EKIS, pc-controlled HACCP monitoring software package available at additional cost.
 Half day chef training included.
 Covered by Electrolux Platinum Star™ Service Program two-year parts and one-year labor warranty, installation start-up and performance check-up after one year from installation.



Approval: _____

Main features

- Dry, hot convection cycle (77 °F to 572 °F): ideal for low humidity baking.
- Low temperature Steam cycle (77 °F to 211 °F): ideal for sous-vide (vacuum packed) re-thermalization and delicate cooking.
- Steam cycle (212 °F): seafood and vegetables.
- High temperature steam (213 °F to 266 °F).
- Combination cycle (77 °F to 482 °F): combining convected heat and steam to obtain humidity controlled cooking environment, accelerating the cooking process and reducing weight loss.
- Pre-programmed re-thermalization cycles for banqueting applications.
- **Air-o-clima™**: Lambda sensor controlled automatic humidity adjustment of cooking environment.
- 6-point multi sensor core temperature probe.
- Pre-programmed Low Temperature Cooking cycle (LTC): minimizes weight loss, maximizes food quality for large pieces of meat.
- Cook&Hold cycle.
- Variable fan speed. Radial fan.
- Reduced power cycle.
- 20 pre-set cooking programs in memory for most popular cooking items.
- 100 program locations in on-board memory, up to 7 cooking steps each.
- **Air-o-clean**: built-in and automatic self-cleaning system.
- Electrolux Platinum Star™ service package included:
 - 2-year parts, 1-year labor warranty.
 - Start-up install check.
 - Equipment check-up after 12 month from installation.
 - Half day Chef training session.

Construction

- IPX 5 splash water protection certification for easy cleaning.
- All 304 Stainless steel construction.
- Seamless hygienic cooking chamber with all rounded corners for easy cleaning.
- Double thermo-glazed door with open frame construction, for cool outside door panel.
- Swing hinged easy-release inner glass on door for easy cleaning.
- Swing hinged front panel for easy service access to main components.
- Integrated spray hose included.

Included Accessories

- 3 of 304 Stainless steel grids PNC 922062


Optional Accessories

- 1 of Rack Cassette (6 racks) PNC 922005
- Open base stand PNC 922051
- Trolley for rack cassette PNC 922004
- Roll-in rack support PNC 922074
- Increased pitch rack cassette (5 racks) PNC 922008
- Pair of chicken racks (8 chickens per rack) PNC 922036
- Non-stick universal pans PNC 922090-2
- Combi oven grill PNC 922093
- 4 castors (2 with brake) PNC 922057
- Fat Filters PNC 922177
- Frying griddle PNC 922215
- Stacking kit 61 on top of 61 or 101 electric PNC 922217
- Stacking kit 61 on top of 102 electric PNC 922221
- Pair of frying baskets PNC 922239
- Heat shield for 61 PNC 922250




**air-o-steam®
Electric Combi Oven 61**

Front View

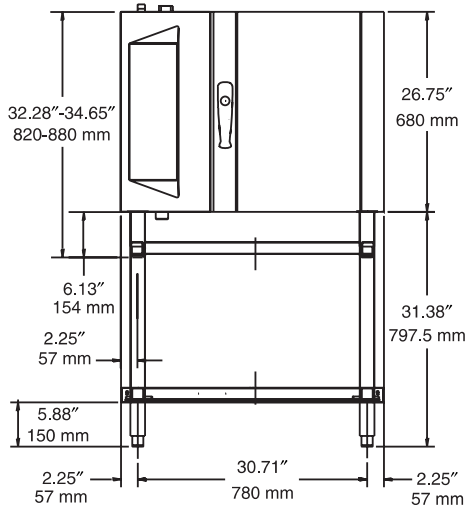


Top View

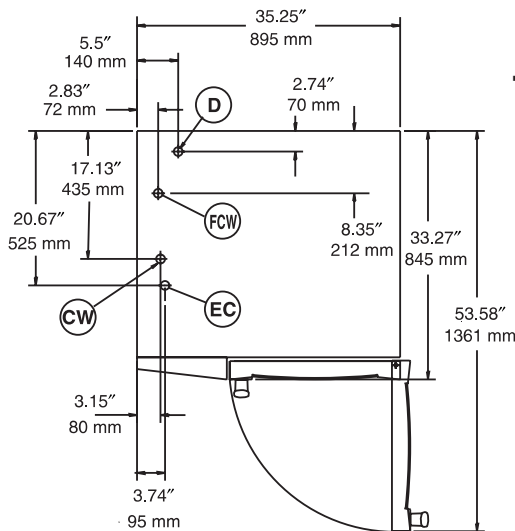

- EC** = Electrical connection
- D** = Water drain
- CW** = Cold Water inlet
- FCW** = Filtered Cold Water inlet

Side View

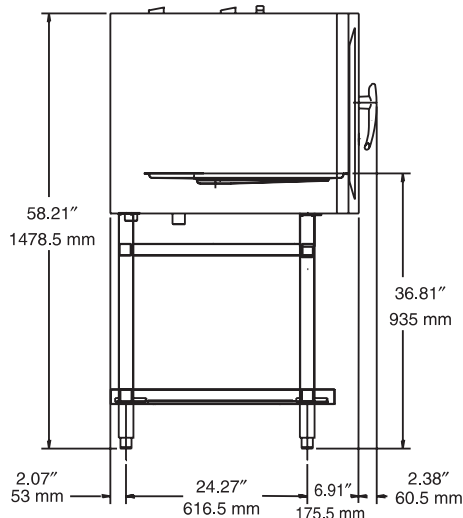

Electric

Supply voltage:

267080 (AOS061EAM1) 208 V/3p/60Hz - 28A

267090 (AOS061EAB1) 240 V/3p/60Hz - 24.5A

Connected load: 10.1 kW

Circuit breaker required

Water

Water inlet "CW" – 3/4" connection:

Unfiltered drinking water

Water inlet "FCW" - 3/4" connection:

Total hardness: 5-50 ppm

Pressure: 22-36 psi (150-250kPa)

Drain "D": 1-1/4" connection

Electrolux recommends the use of treated water, based on testing of specific water conditions.

Please refer to user manual for detailed water quality information.

Installation

Clearance: 2" (5 cm) rear and right hand sides.

Suggested clearance for service access: 20" (50 cm) left hand side.

Capacity

Steam pans: 6 – 12" x 20"

Half size sheet pans: 6 – 13" x 18"

GN: 6 – 1/1 containers

Max load capacity: 66 lbs. (30 kg)

Key Information

Net weight: 254 lbs. (115 kg)

Shipping weight: 273 lbs. (124 kg)

Shipping width: 37-5/8" (955 mm)

Shipping height: 42-1/8" (1070 mm)

Shipping depth: 38-3/4" (985 mm)

Shipping volume: 35.67 cu. ft. (1.01 m³)