



Electrolux

air-o-steam
air-o-steam TOUCHLINE
Natural Gas Combi Oven 201

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



air-o-steam

air-o-steam TOUCHLINE Natural Gas
Combi Oven 201

267754 (AOS201GTP1)

Natural Gas Combi Touchline
Oven 201 - 120V/1ph/60Hz -
7.3A

Short Form Specification

Item No. _____

Unit to be Electrolux air-o-steam® Combi TOUCHLINE Oven. The air-o-steam® features three cooking modes – Automatic, Programs and Manual. Large touch-screen display for both set and actual values of humidity and temperature in cooking chamber during cooking. Three automatic modes: Low Temperature Cooking cycle (LTC), reheating cycle and proofing cycle. Traditional cooking modes - steam (max. 266 °F - 130°C), hot convected air (max. 572 °F - 300°C) and combi-mode (max. 482°F - 250°C). Each cooking mode operates under Lambda-sensor driven air-o-clima™: automatic and constant real humidity control. 6-point multi-sensor for core temperature controlled cooking cycles. All 304 stainless-steel construction, seamless hygienic cooking chamber with all rounded corners. Double thermo-glazed door with open frame construction for cool outside door panel. Halogen cooking chamber lighting. IPX-5 spray water protection certification. Retractable spray hose included as standard. USB connection. air-o-clean™, automatic and built-in self-cleaning system. Food Safe control to automatically monitor and validate the cooking process according to HACCP standards. HACCP management available upon request. Green functions to save energy, water and rinse aid. Half day chef training included. Covered by Electrolux Platinum Star® Service Program two-year parts and one-year labor warranty, installation start-up and performance checkup after one year from installation.

Main Features

- Manual mode: traditional cooking style by manually selecting the parameters. Traditional cooking cycles available:
 - Dry, hot convection cycle (max. 212 °F / max 300 °C): ideal for low humidity cooking such as dehydration, baking and grilling.
 - Low temperature steam cycle (max. 212 °F / 100 °C): ideal for sous-vide (vacuum packed), rethermalization and delicate steam cooking.
 - Steam cycle (212 °F / 100 °C): ideal for traditionally steaming products such as seafood and vegetables.
 - High temperature steam (max. 266 °F / max. 130 °C): ideal for steaming frozen products and vegetables.
 - Combination cycle (max. 482 °F / max. 250 °C): combines convected heat and steam to obtain a humidity controlled cooking environment, accelerating the cooking process, while guaranteeing perfect textures and reducing weight loss.

Possible to set up to 16-phases (steps).

- Programs mode: a maximum of 1000 recipes can be stored in the oven's memory, to replicate the same results at any time. The recipes can be grouped in up to 16 different categories to help organize the menu. Possible to save programs with up to 16-phases (steps) each.
- Automatic mode: by choosing family and food type, the oven automatically selects the appropriate cooking climate, temperature and time. A maximum of 60 personalized preset can be saved per family. Three special automatic cycles available:
 - Low Temperature Cooking cycle (LTC) PATENTED: ideal for large cuts of meat, to minimize weight loss and maximize food quality.
 - Regenerating cycle: efficient humidity management for fast and easy rethermalization, both on plate as well as on tray.
 - Proofing cycle: uses the air-o-clima™ function manages temperature and humidity to create the perfect proofing conditions.
- air-o-clima™ PATENTED: Lambda sensor controlled, automatic humidity adjustment of cooking environment based on settings for perfect textures and repeatability.
- MultiTimer function to manage a sequence of up to 14 different cooking cycles, improving flexibility and ensuring excellent cooking results. Can be saved up to 70 MultiTimers Programs.
- air-o-flow: fresh air from the outside is directed to the bi-functional fan, becomes pre-heated and then pushed into the cooking chamber to guarantee an even cooking process.
- 6-point multi sensor core temperature probe for maximum precision and food safety.
- Fan speeds: full, half speed and pulse. Full speed active as default. Half speed ideal for delicate cooking such as baking. Pulse ideal for low weight loss and for keeping food warm at the end of the cooking cycle.
- Food Safe Control (FSC) PATENTED monitors the cooking process to comply with HACCP standards. HACCP management to record cooking procedure available upon request.
- USB connection: to download HACCP and FSC data, upload the recipes and interface setting.
- Sous-vide USB probe to ensure excellent cooking results even with vacuum-packed products (optional accessory).

APPROVAL: _____

Electrolux Professional, Inc.

www.electroluxusa.com/professional

10200 David Taylor Drive, Charlotte, NC 28262 • Telephone Number: 866-449-4200 • Fax Number: 704-547-7401



Electrolux

air-o-steam TOUCHLINE Natural Gas Combi Oven 201

air-o-steam



Electrolux

air-o-steam
air-o-steam TOUCHLINE
Natural Gas Combi Oven 201

- air-o-clean™ automatic and built-in self cleaning system (4 automatic) with "Green" functions to save energy, water and rinse aid.
- Guided descaling function to guide operator during boiler descaling phase (from "Setting" mode).
- Supplied with n.1 roll-in tray rack, 2 1/2" 63mm pitch and door shield.
- Electrolux Platinum Star® Service package included:
 - 2-year parts, 1-year labor warranty
 - Start-up installation check
 - Equipment check-up after 12 months from installation.
- ETL safety approved, complies with UL 197 and CSA 22.2 listings.
- ETL sanitation approved, complies with NSF/ANSI 2 listing.

Construction

- 304 AISI stainless steel construction throughout.
- Double thermo-glazed door with open frame construction, for cool outside door panel. Swing hinged easy-release inner glass on door for easy cleaning.
- IPX 5 spray water protection certification for easy cleaning.
- Seamless hygienic cooking chamber with all rounded corners for easy cleaning.
- Swing hinged front panel for easy service access to main components.

Included Accessories

- 1 of 20 trolley tray rack for 201 oven (standard pitch) PNC 922007
- 10 of Single 304 stainless steel grid (12"x20") PNC 922062
- 1 of Control panel filter for 201 oven PNC 922248

Optional Accessories

- Automatic water softener for ovens PNC 921305 ☐
- Resin sanitizer for water softener PNC 921306 ☐
- 20 trolley tray rack for 201 oven (standard pitch) PNC 922007 ☐
- 16 Tray rack trolley for 201 oven (increased pitch) PNC 922010 ☐
- Thermal blanket for 201 trolley racks PNC 922014 ☐
- Trolley rack for 201 with 3" (75 mm) pitch, 54 plates PNC 922016 ☐
- Pair of half size oven racks, type 304 stainless steel PNC 922017 ☐
- Chicken racks, pair (2) (fits 8 chickens per rack) PNC 922036 ☐
- Pastry Trolley (400mm x 600mm) for 20 Hotel or Steam pans air-o-system PNC 922068 ☐
- Trolley rack for 201 with 3 1/2 (90 mm) pitch, 45 plates PNC 922072 ☐
- Stainless steel 304 grids (GN 1/2) with spikes, fits 4PNC 922086 ☐ chickens
- GN 1/1 (12" x 20") tray made of aluminium alloy with no-stick coating, 3/4" (20 mm) deep PNC 922090 ☐
- GN 1/1 (12" x 20") tray made of aluminium alloy with no-stick coating, 1 1/2" (40 mm) deep PNC 922091 ☐
- GN 1/1 (12" x 20") tray made of aluminium alloy with no-stick coating, 2 1/2" (65 mm) deep PNC 922092 ☐
- Door shield for 201 oven (pre-heat without trolley) PNC 922094 ☐
- External side spray unit (needs to be mounted outside and includes support for mounting to oven) PNC 922171 ☐
- (2) fat filters for 201 and 202 oven PNC 922179 ☐
- 16" x 24" (400 x 600mm) Baguette tray, made of perforated aluminium, silicon coated PNC 922189 ☐


- 16" x 24" (400 x 600mm) Perforated baking tray, made of perforated aluminium PNC 922190 ☐
- Baking tray, made of aluminium 16" x 24" (400 x 600 mm) PNC 922191 ☐
- Basket for detergent tank (wall mounted) PNC 922209 ☐
- GN 1/1 (12" x 20") frying griddle, made of aluminium alloy with no-stick coating PNC 922215 ☐
- Flue condensor for gas ovens PNC 922235 ☐
- Pair of frying baskets PNC 922239 ☐
- Heat shield for 201 oven PNC 922243 ☐
- External spray unit with retractable spray hose for 201 and 202 ovens PNC 922263 ☐
- Grid for whole chicken 1/1GN (8 per grid - 1,2kg each) PNC 922266 ☐
- Electronic Board for HACCP through PC Network, for air-o-steam and air-o-convect Ovens PNC 922275 ☐
- Kit to convert from natural gas to LPG PNC 922277 ☐
- Adjustable wheels for 201 oven PNC 922280 ☐
- USB Probe for sous-vide cooking (only for Touchline oven) PNC 922281 ☐
- Baguette tray (holds 4), made of perforated aluminium, silicon coated, GN1/1 (12" x 20") PNC 922288 ☐
- Oven grill made of aluminium alloy with no-stick coating PNC 922289 ☐
- GN 1/1 (12" x 20") egg fryer grid, made of aluminium alloy with no-stick coating. Fits 8 eggs PNC 922290 ☐
- Conversion kit from natural gas to LPG for 201 ovens PNC 922297 ☐
- GN 1/1 (12" x 20") baking sheet, made of aluminium alloy with no-stick coating PNC 922299 ☐
- GN 1/1 (12" x 20") potato baker grid (holds 28 potatoes) PNC 922300 ☐
- GN 1/2 (10" x 12") tray made of aluminium alloy with no-stick coating, 3/4" (20 mm) deep PNC 922308 ☐
- GN 1/2 (10" x 12") tray made of aluminium alloy with no-stick coating, 1 1/2" (40 mm) deep PNC 922309 ☐
- GN 1/2 (10" x 12") tray made of aluminium alloy with no-stick coating, 2 1/2" (65 mm) deep PNC 922310 ☐
- Fat collection tray PNC 922321 ☐
- NPT adaptor 1 1/4" gas for ovens PNC 922332 ☐
- Smoker for ovens PNC 922338 ☐
- - NOT TRANSLATED - PNC 922346 ☐




Electrolux

air-o-steam air-o-steam TOUCHLINE Natural Gas Combi Oven 201

Front

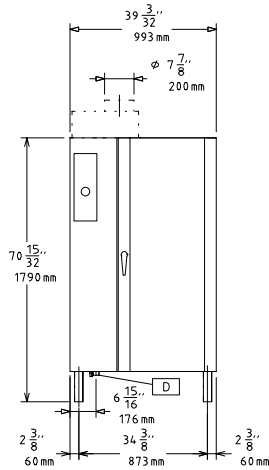


Top

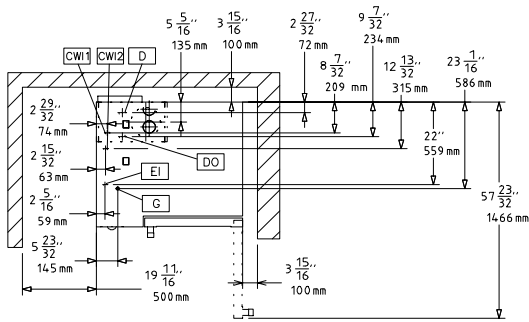

- CW1** = Cold Water inlet
- D** = Drain
- EI** = Electrical connection
- G** = Gas connection

Side

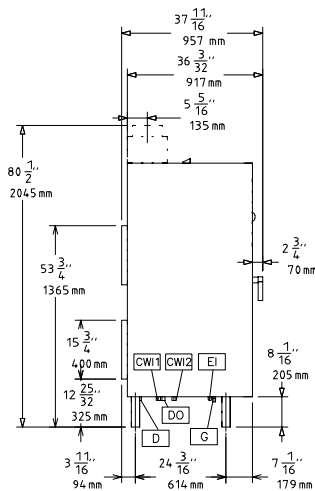

Electric

Supply voltage:

267754 (AOS201GTP1) 120 V/1 ph/60 Hz

Amps:

7.1 A

Circuit breaker required

Gas

ISO 7/1 gas connection diameter: 1" MNPT

Natural gas:

Steam generator: 30 kW
 Heating elements: 160223 BTU (47 kW)
 Total thermal load: 232232 BTU (68 kW)
 Natural gas - Pressure: 7" w.c. (17.4 mbar)

LPG:

Steam generator: 102270 BTU (30 kW)
 Heating elements: 160223 BTU (47 kW)
 Total thermal load: 232232 BTU (68 kW)
 Pressure: 11" w.c. (27.4 mbar)

Water:

Water inlet "CW" connection: 3/4"

Water consumption (gal./hr.): Min: 4.49 Max: 20.08

Water inlet "FCW" connection: 3/4"

5-50ppm (boiler/steam – rear connection) less than 400ppm (cleaning/quenching - front connection)

Hardness:

Pressure: 22-36 psi (1.5-2.5 bar)

Drain "D":

1"1/4

Conductivity:

(50-200 µs/cm)

Chlorides:

(must be less than 20 ppm)

PH:

(must be greater than 7)

Electrolux recommends the use of treated water, based on testing of specific water conditions.

Please refer to user manual for detailed water quality information.

It is obligatory upon the end-user to supply the combi with water that conforms to the specifications attached on the spec sheet. A properly sized system combined with a disciplined filter replacement regimen will ensure the maximum life of the oven.

Installation:

Clearance:

2" rear and right hand sides.

Suggested clearance for service access:

20" left hand side.

Capacity:

Steam pans:

20 - 12" x 20"

Half size sheet pans:

20 - 13" x 18"

Max load capacity:

220 lbs. (100 kg)

Key Information:

Net weight:

721 lbs (327 kg)

Shipping width:

41 5/16" (1050 mm)

Shipping depth:

40 3/16" (1020 mm)

Shipping height:

80 5/16" (2040 mm)

Shipping weight:

776 lbs (352 kg)

Shipping volume:

77.15 ft³ (2.18 m³)

air-o-steam
air-o-steam TOUCHLINE Natural Gas Combi Oven 201

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2014.07.01