

## 1000-SK/III LOW TEMPERATURE SMOKER OVEN



• HALO HEAT . . . a controlled, uniform heat source that maintains close temperature tolerances throughout the cooking and holding function. Offers uniform and consistent cooking on a daily basis, low shrinkage of bulk or portion-cut protein items, higher food moisture content, and significantly longer holding life.



- Cooks, roasts, re-heats, smokes and holds in the same cabinet with set-and-forget controls to provide a better distribution of work loads.
- Smokes with real wood chips — no pressure cooking, no artificial smoke flavor.
- Smoke timer offers a choice of mild, medium, or heavy smoke flavor.
- Cold smokes fish and cheese.
- Cooks by time or by probe to sense internal product temperature and automatically converts from cook mode to hold mode once the set parameters have been reached.
- Eight programmable menu buttons store favorite recipes into memory (COOK/HOLD/TIME/PROBE SET-POINTS). Reduces operational requirements to simply loading the oven, pushing the power button, the preset menu button, and start.
- When cooking by probe, the oven maintains a record of the highest and lowest temperatures sensed by the food probe to assure foods are cooked to the temperature required.
- Oven includes the patented SureTemp™ heat recovery system to assure immediate compensation for any heat loss whenever the door is opened and provides an audible reminder if the door has been left open for more than three minutes.
- Antimicrobial handle retards the growth of illness-causing pathogens.

Single compartment smoker with 20 gauge stainless steel exterior. Door includes a magnetic door latch. Oven interior includes two (2) completely removable, non-magnetic stainless steel side racks with eleven (11) pan positions spaced on 1-3/8" (35mm) centers, two (2) stainless steel wire shelves, one (1) stainless steel Rib Rack, a removable stainless steel drip pan with drain and a wood chip container. Oven is furnished with an exterior, front mounted stainless steel drip tray and one (1) sample bag each of cherry, hickory, apple & maple wood chips. Oven includes one (1) set of 3-1/2" (89mm) casters — 2 rigid, and 2 swivel with brake.

Deluxe control includes a 4 digit L.E.D. display, ON/OFF key, cook temperature key with an adjustable cook range from 200°F to 325°F (93°C to 162°C); cook time control key with set-points from 1 minute to 24 hours; smoke time control key with set-points from 1 minute to 1 hour; probe control key with adjustable set-points between 50°F and 195°F (10°C to 91°C); and hold temperature key with an adjustable hold range from 60°F to 205°F (15°C to 96°C). Control includes eight (8) programmable menu keys with locking capability along with the ability to set individual cook and hold parameters; hold mode count-up timer, indicator lights for operation status; and start key. The control has a built-in lock out feature and is equipped with a voltage conversion feature to match the line voltage provided by the electric power supplier.


**MODEL 1000-SK/III:** Low temperature smoker oven with Deluxe control.

### FACTORY INSTALLED OPTIONS

- Specify Door:
  - Solid Door, standard
  - Window Door, optional
- Specify Door Swing:
  - Right-hand swing, standard
  - Left-hand swing, optional
- Specify Voltage:
  - 208-240
  - 230
- Specify exterior panel color:
  - Stainless steel, standard
  - Burgundy, optional
  - Custom, optional
- Cooking thermostat limit set at 250°F for restricted areas of the U.S.A.
  - Specify on order as required.

### ADDITIONAL FEATURES

- Rib Rack Shelf • Item SH-29474**  
Special non-magnetic stainless steel wire shelf designed to hold ribs or fish in an upright position for more even smoking. Each shelf will hold thirteen full ribs. One (1) Rib Rack Shelf is furnished with each smoker. Additional racks are available as an option. Total oven capacity: Three (3) Rib Rack Shelves.



**Lifetime  
Warranty**

On all Cook & Hold heating elements (EXCLUDES LABOR).



ANSI/NSF 4




W164 N9221 Water Street • P.O. Box 450 • Menomonee Falls, Wisconsin 53052-0450 • U.S.A.

PHONE: 262.251.3800 800.558.8744 U.S.A./CANADA FAX: 262.251.7067 800.329.8744 U.S.A. ONLY

www.alto-shaam.com


# 1000-SK/III

## LOW TEMPERATURE SMOKER OVEN

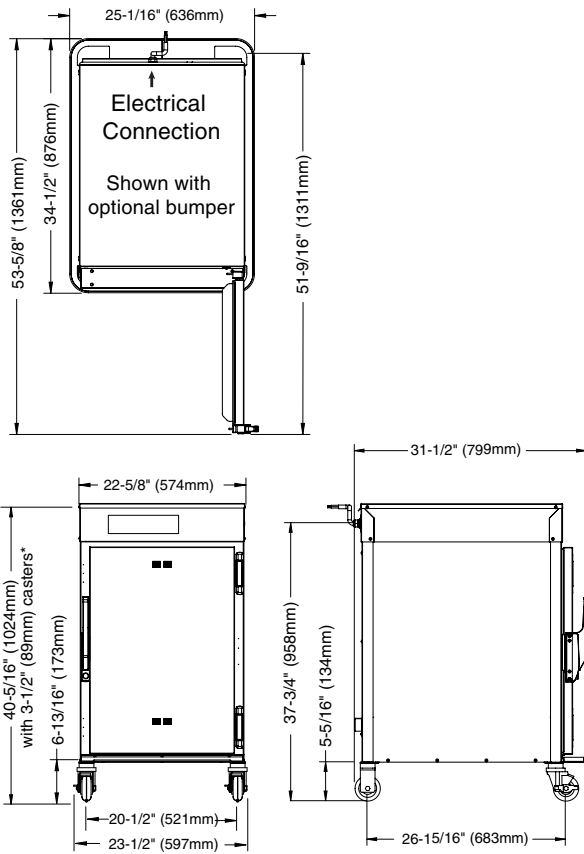

\*42" (1067mm) - with optional 5" (89mm) casters  
 \*41-7/8" (1063mm) - with optional 6" (152mm) legs

<b>DIMENSIONS:</b> H x W x D	
<b>EXTERIOR:</b>	40-5/16" x 22-5/8" x 31-1/2" (1024mm x 574mm x 799mm)
<b>INTERIOR:</b>	26-7/8" x 18-7/8" x 26-1/2" (683mm x 479mm x 673mm)

<b>ELECTRICAL</b>					
VOLTAGE	PHASE	CYCLE/HZ	AMPS	kW	CORD & PLUG
208-240 (AGCY)	1	60	15.8	3.8	NO CORD
at 208	1	60	14.4	3.0	OR PLUG
at 240	1	60	16.7	4.0	
230	1	50	14.0	2.8	 CEE 7/7 220-230V PLUG

<b>PRODUCT\PAN CAPACITY</b>	
120 lbs (54kg) MAXIMUM	
VOLUME MAXIMUM: 60 QUARTS (76 LITERS)	
Three (3)	FULL-SIZE PANS: 20" x 12" x 2-1/2" ON OPTIONAL WIRE SHELVES ONLY
	GASTRONORM 1/1: 530mm x 325mm x 65mm
Seven (7)	FULL-SIZE SHEET PANS: 18" x 26" x 1"

<b>CLEARANCE REQUIREMENTS</b>	
18" (457mm) minimum clearance at the back from heat producing equipment. To protect the electronic control, maintain sufficient side clearance to prevent the control area from reaching any temperature at or above 140°F (60°C).	
<b>WEIGHT</b>	
NET: 203 lb (92 kg) EST.	SHIP: 282 lb (128 kg) EST.
<b>CARTON DIMENSIONS:</b> (L x W x H)	
35" x 35" x 50" (889mm x 889mm x 1270mm)	

<b>INSTALLATION REQUIREMENTS</b>	
— Oven must be installed level.	
— The oven must not be installed in any area where it may be affected by steam, grease, dripping water, extreme temperatures, or any other severely adverse conditions.	
— Appliances with casters and no cord or plug must be secured to the building structure with a flexible connector. NOT FACTORY SUPPLIED.	

<b>OPTIONS &amp; ACCESSORIES</b>	
<input type="checkbox"/> Bumper, Full Perimeter (NOT AVAILABLE WITH 2-1/2" CASTERS)	5009767
<input type="checkbox"/> Carving Holder, Prime Rib	HL-2635
<input type="checkbox"/> Carving Holder, Steamship (Cafeteria) Round	4459
Casters, Stem - 2 RIGID, 2 SWIVEL W/BRAKE	
<input type="checkbox"/> 2-1/2" (64mm)	5008022
<input type="checkbox"/> Door Lock with Key	LK-22567
<input type="checkbox"/> Drip Pan with Drain, 1-11/16" (43mm deep)	5005616
<input type="checkbox"/> Drip Pan without Drain 1-7/8" (62mm deep)	11906
<input type="checkbox"/> Drip Pan without Drain 4" (101mm deep)	15929
<input type="checkbox"/> Legs, 6" (152mm), Flanged (SET OF FOUR)	5011149
<input type="checkbox"/> Pan Grid, Wire - 18" x 26" PAN INSERT	PN-2115
<input type="checkbox"/> Security Panel w/ Key Lock	5005776
<input type="checkbox"/> Shelf, Stainless Steel, Flat Wire	SH-2325
<input type="checkbox"/> Shelf, Stainless Steel, Rib Rack	SH-29474
<input type="checkbox"/> Stacking Hardware	5004864
Wood Chips bulk pack - 20 lb (9 kg)	
<input type="checkbox"/> Apple	WC-22543
<input type="checkbox"/> Cherry	WC-22541
<input type="checkbox"/> Hickory	WC-2829
<input type="checkbox"/> Maple	WC-22545