

ASC-4E

THE PLATINUM SERIES ELECTRIC CONVECTION OVEN



ASC-4E

WITH OPTIONAL STATIONARY OVEN STAND
AND PAN RACK WITH SHELVES - 5003489

- Superior baking and roasting capability.
- A dependent 60/40 door system includes solid stainless steel doors and a double pane thermal window door to view the lighted oven interior.
- Both doors open beyond a 120-degree angle for easier loading; include a spring-loaded roller assembly to provide a positive, pressure-lock seal; and a heavy-duty door hinging system.
- Solid welded construction with stainless steel front, top, left and right sides. Rear enclosure panel is made with corrosion resistant coated steel.
- Removable oven baffle provides easy cleaning.
- Heavy-duty 3/4 hp, two-speed motor provides a fan speed for high volume production or delicate baking.
- Easy to clean porcelain enamel oven interior is standard.
- 10kW element.
- Durable, low maintenance stainless steel door gaskets.

The Platinum Series electric convection oven features solid welded construction and an angle iron frame. The oven interior is constructed of porcelain enamel with coved corners, and a heavy duty, 14 gauge bottom liner. It is supplied with six (6) chrome plated wire shelves with 2 removable side racks and 12 shelf positions spaced at 1-3/4" (43mm). The oven is furnished with two interior lights, a 10,000 watt heating element and a heavy duty, 3/4 hp, two-speed fan motor. Control includes a 100°F to 500°F (38°C to 260°C) thermostat and a 60 minute count-down timer. The control features a oven cool-down function, oven-ready indicator light, and produces an audible signal when time has expired. The oven is supplied with 25" (635mm) legs with bullet feet.

MODEL ASC-4E: MANUAL CONTROL, PORCELAIN ENAMEL INTERIOR

MODEL ASC-4E/e: ELECTRONIC CONTROL WITH FOOD PROBE, PORCELAIN ENAMEL INTERIOR



FACTORY INSTALLED OPTIONS

- Stainless steel oven interior

ADDITIONAL FEATURES

- Stackable design
- Easy access for bulb replacement



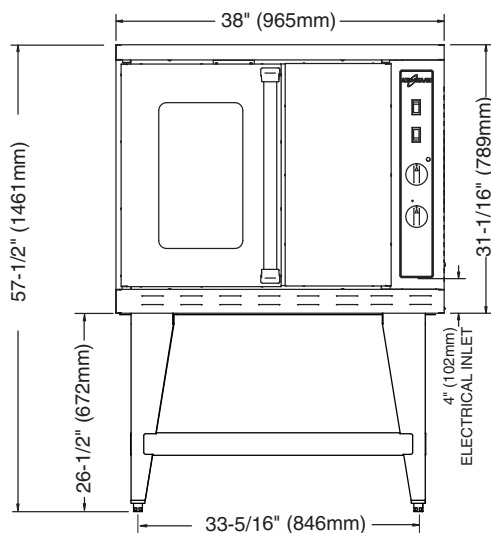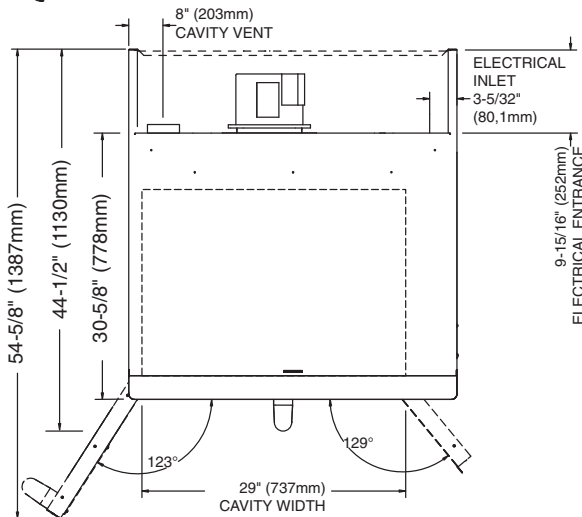

DIMENSIONS: H x W x D

EXTERIOR: 57-1/2" x 38" x 44-1/2" (1461mm x 965mm x 1130mm)

INTERIOR: 24" x 29-1/8" x 25" (610mm x 740mm x 635mm)

ELECTRICAL

VOLTAGE	PHASE	CYCLE/HZ	AWG	AMPS	kW
208 (AGCY)	1	60	6	50.0	10.4
240 (AGCY)	1	60	6	43.3	10.4
208 (AGCY)	3	60	8	28.8	10.4
240 (AGCY)	3	60	8	25.0	10.4
480 (AGCY)	3	60	8	12.5	10.4
220 (AGCY)	1	50	6	40.0	8.7

NO CORD AND PLUG

MINIMUM CLEARANCE REQUIREMENTS

SIDES, LEFT AND RIGHT	2" (51mm)
BACK SIDE	0" (0mm)
FROM GREASE PRODUCING EQUIPMENT	6" (152mm)
RECOMMENDED SERVICE ACCESS RIGHT SIDE	20" (508mm)

INSTALLATION REQUIREMENTS

- This appliance must be installed level and must not be installed in any area where it may be affected by steam, grease, dripping water, high temperatures, or any other severely adverse conditions.
- Mobile appliances must be secured to the building structure by means of a restraining device (NOT FACTORY SUPPLIED).
- Hood installation is recommended (CHECK LOCAL CODES).

OPTIONS & ACCESSORIES

<input type="checkbox"/> COOLING RACK FOR OVEN STAND	5003791
LEG SET (4)	
<input type="checkbox"/> 6" (152mm) with Bullet Feet	5003794
<input type="checkbox"/> 6" (6152mm) with Seismic Feet	5003795
<input type="checkbox"/> 25" (635mm) with Seismic Feet	5003785
<input type="checkbox"/> REAR ENCLOSURE PANEL, Stainless Steel	5005876
SHELF, OVEN RACK	
<input type="checkbox"/> INTERCHANGEABLE WITH COOLING RACK	SH-26795
STACKING HARDWARE	
SEE INDIVIDUAL STACKING COMBINATION SPECIFICATION SHEETS	
STAND, STAINLESS STEEL	
<input type="checkbox"/> Mobile, with Cooling Racks & Casters, 38" H (965mm)	5003786
<input type="checkbox"/> Stationary, with Cooling Racks & Bullet Feet	5003489
<input type="checkbox"/> Stationary, with Cooling Racks & Seismic Feet	5003787
34-1/4" (870mm) min. • 35-1/2" (902mm) max. H (FEET ARE ADJUSTABLE)	

PRODUCT \ PAN CAPACITY

72 lb (33 kg) maximum • 45 qts (43 liters)
Twelve (12): 18" x 26" x 1" full-size sheet pans
6 chrome plated wire shelves with 2 removable side racks and 12 shelf positions spaced at 1-3/4" (43mm)

WEIGHT

NET	393 lb	(178kg)
SHIP	535 lb	(243 kg)
CRATE DIMENSIONS:	53" L x 45" W x 49" H (1346mm x 1143mm x 1245mm)	
MINIMUM ENTRY CLEARANCE	31-1/2" (800mm)	UNCRATED, WITHOUT LEGS