

## CS-100

### HEATED CARVING STATION



- HALO HEAT . . . a controlled, uniform heat source radiating heat directly from the carving shelf surface.
- Fixed lamp assembly provides additional heat to the product surface for greater ambient surface temperature control.
- Proper and safe serving temperatures maintained without additional cooking.
- Shelf surface is recessed to catch drippings.
- Sanitary cutting board with gravy lane is completely removable. NSF and USDA listed.
- Designed to fit on top of a HALO HEAT Cook & Hold Oven, Heated Holding Cabinet, or suitable for placement on any surface.
- Clear glass customer breath guard easily slides in place and meets new NSF breath guard specifications.
- Low energy usage.



CS-100/S

CS-100 heated carving station is constructed with 18 gauge stainless steel and includes one (1) ON/OFF power switch and one (1) indicator light. Heated shelf base is controlled by one (1) three position toggle switch for LOW/MED/HIGH heat. The 250 watt infrared heat lamp is controlled by one (1) ON/OFF switch. The exterior has a recessed surface to catch drippings and is furnished with one (1) set of 1" (25mm) legs and one (1) 13-3/4" x 16" x 1/2" (349mm x 406mm x 13mm) cutting board. It is available with or without a clear glass breath guard that is framed and easily slides into place.

☐ **MODEL CS-100:** Carving shelf with one lamp

☐ **MODEL CS-100/S:** Carving shelf with one lamp and clear glass customer breath guard



#### ADDITIONAL ACCESSORIES

- Carving Holders
- Cutting Board




W164 N9221 Water Street • P.O. Box 450 • Menomonee Falls, Wisconsin 53052-0450 • U.S.A.

PHONE: 262.251.3800 800.558.8744 U.S.A./CANADA

FAX: 262.251.7067 800.329.8744 U.S.A. ONLY

[www.alto-shaam.com](http://www.alto-shaam.com)

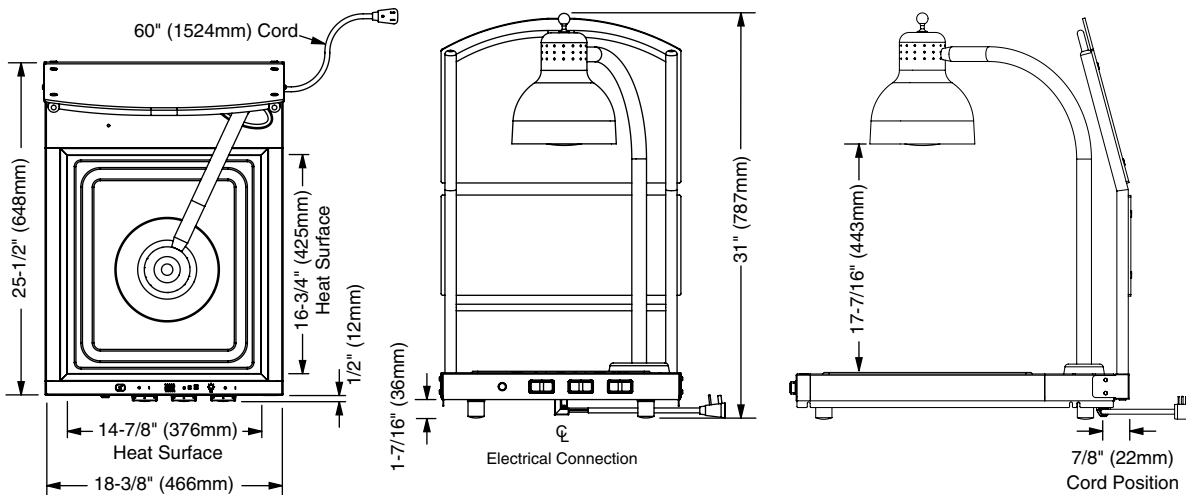

### DIMENSIONS: (H x W x D)

31" x 18-3/8" x 25-1/2"  
(787mm x 466mm x 648mm)

### PRODUCT/PAN CAPACITY

35 lbs (16 kg) MAX.

### INSTALLATION REQUIREMENTS

Carving shelf must be installed level, and must not be installed in any area where it may be affected by steam, grease, dripping water, high temperatures, or any other severely adverse conditions.

### STACKING CONFIGURATIONS

- On 500-S holding cabinet
- On 500-TH-II or 500-TH/III Cook & Hold oven

**Note:** Remove rubber feet and spacers prior to installation on 500 Series units.

### ELECTRICAL

VOLTAGE	PHASE	CYCLE/HZ	AMPS	kW	CORD & PLUG
120	1	60	4.2	0.5	NEMA 5-15P 15A - 120V PLUG
230	1	50/60	2.2	0.5	CEE 7/7, PLUG RATED 250V CH2-16P PLUG RATED 250V BS 1363 (U.K. ONLY) PLUG RATED 250V

### WEIGHT

NET CONTACT FACTORY

SHIP 130 lbs. (59 kg)

CRATE DIMENSIONS (L x W x H)

35" x 23" x 41" (889mm x 584mm x 1041mm)

### ATTENTION

Warranty does not apply if the shelf is flooded or immersed in water.

### OPTIONS & ACCESSORIES

Carving Holders

☐ Prime Rib HL-2635

☐ Steamship Round 4459

☐ Cutting Board, 13-3/4" x 16" x 1/2" (349mm x 406mm x 13mm) BA-28482