

ED2-72 SERIES ED2SYS-72 SERIES

HEATED DISPLAY SYSTEMS



ED2-72



ED2SYS-72



- HALO HEAT ... a controlled, uniform heat source that gently holds and surrounds food for better appearance, taste, and longer holding life.
- Holds and displays hot food fresh and moist for hours — without adding water.

- Expandable system to meet your specific requirements.
- Matches profile of leading refrigerated display case.

• **HOT DISPLAY CASE**

- Curved glass styling.
- Displays hot food without condensation on glass.
- Protected with an environmentally friendly bumper, made of 93% pre-consumer polycarbonate waste and is 100% recyclable.
- Thermostatically controlled heat source radiates from the base of the display case in multiple heat zones.
- Overhead light zones with shatterproof coated bulbs.
- Holds a full range of standard (gastronom) pan sizes, full-size or half-size sheet pans.
- Tempered sliding glass doors reflect heat back into the products and mirror the display to enhance merchandising effect.

• **DECORATOR BASE**

- Standard black painted front and end panels.


• **SELF-SERVICE HOT DISPLAY**

- Customer self-service opening is available on right side, left side, or across the full length of case.
- Front mounted heat-guard provides customer protection.

The display case is constructed of 18 gauge, non-magnetic stainless steel. A tempered glass front encloses the display case and can be lifted to a 90 degree angle for easy cleaning. Removable, sliding glass doors on the operator side are included. Sliding door tracks have a "clean sweep" cutout allowing for easy cleaning and crumb removal. Framed end glass with rubber gasket material protects glass edges from chipping and breakage. The base is divided into two (2) individually managed heat zones with each zone controlled by a separate thermostat with a range of 1 through 10 and heat-on indicator light. Overhead lights are controlled by ON/OFF switches in two (2) light zones. Two (2) 125V plug outlets are available as an option on 120/208-240V units only. Counter-top display cases include one set of 4" (102mm) legs.

- ED2-72 - 72" (1829mm) length
- ED2SYS-72* - 72" (1829mm) length, with base
- ED2-72/P - 72" (1829mm) length, 71-5/16" (1811mm) self-service opening across full length of case front
- ED2SYS-72/P* - 72" (1829mm) length, with base, 71-5/16" (1811mm) self-service opening across full length of case front
- ED2-72/PL - 72" (1829mm) length, 23-3/4" (603mm) self-service opening on left side of case front
- ED2SYS-72/PL* - 72" (1829mm) length, 23-3/4" (603mm) with base, self-service opening on left side of case front
- ED2-72/PR - 72" (1829mm) length, 23-3/4" (603mm) self-service opening on right side of case front
- ED2SYS-72/PR* - 72" (1829mm) length, with base, 23-3/4" (603mm) self-service opening on right side of case front

*The system base is not sold as a separate item. Order the full ED2SYS model to receive the base.



FACTORY INSTALLED OPTIONS


- Electrical Choices
 - Specify Voltage:
 - 120/208-240
 - 230
 - 380-415
- Panel Color Choices
 - Specify color:
 - Black, standard
 - Stainless Steel, optional
 - Custom Color, optional
- End Glass Choices
 - Specify choice
 - Clear Glass, standard
 - Solar Bronze Glass, optional
- Temperature Gauge, optional



W164 N9221 Water Street • P.O. Box 450 • Menomonee Falls, Wisconsin 53052-0450 • U.S.A.
PHONE: 262.251.3800 800.558.8744 U.S.A./CANADA FAX: 262.251.7067 800.329.8744 U.S.A. ONLY


www.alto-shaam.com

ED2-72 SERIES ED2SYS-72 SERIES HEATED DISPLAY SYSTEMS

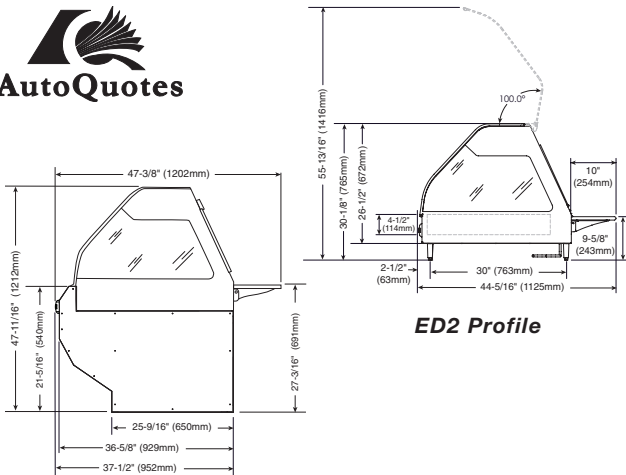

ED2 Profile

ED2SYS Profile

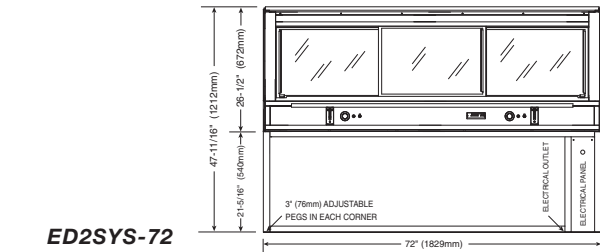

ED2SYS-72

INSTALLATION REQUIREMENTS

Display case must be installed level. The display case must not be installed in any area where it may be affected by steam, grease, dripping water, high temperatures, or any other severely adverse conditions.

Do not install a heated display case near a cold air source such as a freezer, air conditioning vents, or in any area where outside air fluctuation can affect performance.

WEIGHT

| MODEL | NET | SHIP |
|---|-----------------|-----------------|
| ED2-72 | 419 lb (190 kg) | 465 lb (210 kg) |
| ED2SYS-72 | 621 lb (282 kg) | 700 lb (317 kg) |
| ED2-72/P | 450 lb (204 kg) | 500 lb (227 kg) |
| ED2SYS-72/P | 661 lb (299 kg) | 700 lb (317 kg) |
| ED2-72/PL; /PR | 432 lb (197 kg) | 480 lb (295 kg) |
| ED2SYS-72/PL; /PR | 643 lb (318 kg) | 700 lb (317 kg) |
| CRATED DIMENSIONS (EST.): H X W X D | | |
| ED2-72: 45" x 85" x 55" (1143mm x 2159mm x 1397mm) | | |
| ED2SYS-72: 65" x 85" x 55" (1651mm x 2159mm x 1397mm) | | |

FACTORY INTALLED OPTIONS

| | | | |
|--|---------|--|---------|
| <input type="checkbox"/> INDEPENDENT ELECTRICAL OUTLET | 5001781 | <input type="checkbox"/> TEMPERATURE PROBE | 5004917 |
|--|---------|--|---------|

ACCESSORIES

| | | | |
|--|---------|--|---------|
| <input type="checkbox"/> BUTTING KIT (SEAMLESSLY CONNECT MULTIPLE SYSTEMS) | 5008523 | SHEET PAN DIVIDER BAR PACKAGE | |
| <input type="checkbox"/> CARVING STATION | 5001874 | <input type="checkbox"/> FULL-SERVICE | 5002803 |
| <input type="checkbox"/> PAN INSERT, SELF-SERVICE 4" (102mm) DEEP | 1001991 | <input type="checkbox"/> SELF-SERVICE LEFT-SIDE OR RIGHT-SIDE OF CASES | 5002804 |
| PLATFORM SCALE | | <input type="checkbox"/> THERMOSTAT GUARD COVER PLATE | 5007660 |
| <input type="checkbox"/> LEFT-HAND | 5001308 | <input type="checkbox"/> WORK SHELF WITH GRAVY LANE | 5005639 |
| <input type="checkbox"/> RIGHT-HAND | 5001307 | | |

DIMENSIONS (H X W X D)

| | |
|---|---|
| EXTERIOR, COUNTER-TOP MODEL WITH LEGS: | 30-1/8" x 72" x 44-5/16" (765mm x 1829mm x 1125mm) |
| EXTERIOR, WITH BASE: | 47-11/16" x 72" x 47-3/8" (1761mm x 1829mm x 1202mm) |
| WELL DIMENSIONS (W X L X D): | 27-3/16" x 69-5/16" x 4-1/2" (690mm x 1760mm x 114mm) |

ELECTRICAL

| VOLTAGE | PHASE | CYCLE/HZ | AMPS | KW | |
|--------------------|-------|----------|-------|-----|--------------------------------|
| 120/208-240 (AGCY) | 1 | 50/60 | 18.75 | 4.5 | NEMA L14-20P 20A, 250V PLUG |
| AT 208 | 1 | 50/60 | 19.0 | 4.6 | |
| AT 240 | 1 | 50/60 | 19.0 | 4.6 | |
| 230 (AGCY) | 1 | 50 | 18.3 | 4.2 | BARE END, NO PLUG |
| 230 | 1 | 50 | 18.4 | 4.2 | |
| 380-415 (AGCY) | 3 | 50 | 9.7 | 4.4 | BARE END, NO PLUG |
| AT 380 | 3 | 50 | 9.3 | 3.9 | |
| AT 415 | 3 | 50 | 10.1 | 4.6 | |

PAN CONFIGURATION*

| PAN SIZE | DIMENSIONS | QTY. |
|--------------------------|-----------------------------|------|
| FULL-SIZE & ONE-THIRD**: | 12" x 20" x 2-1/2" (GN 1/1) | 5 |
| | 12" x 6" x 2-1/2" (GN 1/3) | 5 |
| HALF-SIZE & ONE-THIRD**: | 12" x 10" x 2-1/2" (GN 1/2) | 10 |
| | 12" x 6" x 2-1/2" (GN 1/3) | 5 |
| FULL-SIZE SHEET PANS: | 18" x 26" x 1" | 3 |
| MAX. CAPACITY/VOLUME: | 80 lbs (36 kg) | |
| | 50 qts (60 L) | |

* Pans are not included with display case.
** Will also accept 4" (100mm) deep pans.

SPECIFICATIONS

- Ten (10) overhead lights with two (2) light zones.
- Two (2) base heat zones with two (2) adjustable thermostats with a range of 1 through 10, and two (2) heat-on indicator lights.
- Three (3) tinted, reflective, tempered glass sliding doors on operator side.
- One (1) 10" x 60" (254mm x 1524mm) operator-side work shelf.
- Self-serve model ED2-72/P has a self-serve pan insert 26-7/16" x 69-3/16" x 2" (672mm x 1757mm x 51mm) and includes three (3) Wire Pan Grids.
- Self-serve models ED2-72/PL and ED2-72/PR have a self-serve pan insert 21-5/8" x 26-7/16" x 2" (549mm x 672mm x 51mm) and includes one (1) Wire Pan Grid.