






HFT2-300

HOT FOOD TABLE



- Freestanding, self-service merchandiser designed to hold and display hot food fresh and moist for hours — without adding water.
- Lighted display maximizes visual merchandising promotes impulse sales.
- Heat source radiates from the base and the upper canopy with adjustable temperature settings.
- Concealed power and temperature switches are easily accessible to the operator.
- Maintenance savings with the elimination of lime and scale buildup associated with steam table holding.
- Angled canopy on two sides adds to the clean streamlined look.
- Tray slides on each side add customer self-service convenience and safety.
- Full Lexan side panels provide protective enclosure.

20 gauge stainless steel hot food table features an 18 gauge stainless steel hot well, and two (2) full length stainless steel tray slides. The 4-3/8" (111mm) deep hot well accepts three (3) full-size (gastronorm) pans and is controlled by an adjustable thermostat with a range of 1 through 10. Two (2) full-size pan divider bars and six (6) half/third-size pan divider bars are included. The overhead canopy is supported by two (2) side supports, enclosing six (6) flood lamps and is surrounded by four (4) removable tempered glass heat guards. A toggle switch located beneath the canopy controls the power (ON/OFF). Counter-top model includes a set of four (4) adjustable 4" (102mm) legs.

System base comes standard with two (2) side panels, two (2) adjustable shelves, and is furnished with four (4) 5" (127mm) casters, 2 rigid, and 2 swivel with brake.

	MODEL HFT2-300	· Counter-ton	Hot Food T	Table 48" ((1220 mm)	wide
\Box	MIODEL 111 12-300	• Counter-top	TIOL FOOG I	labie, to t	1440111111	wide

	MODEL HFT2SYS-300:	Hot Food	Table with S	ystem Base	48"	(1220 mm)	wide
--	--------------------	----------	--------------	------------	-----	-----------	------



ANSI/NSF 4





FACTORY INSTALLED OPTIONS

- Electrical Choices
 - **⇒** Specify Voltage:
 - □ 208-240
 - □ 230
- System Decorator Base (floor standing)
 - **⇒** Specify option:
 - ☐ Standard includes stainless steel base, choice of side panels, and two (2) adjustable stainless steel shelves.
 - ☐ Deluxe features formica end panels and canopy, four (4) wooden adjustable shelves and two (2) removable wooden side baskets.
- Panel Color Choices
 - **⇒** Specify color:

Ш	1	31	a	C.	K

☐ Stainless	Stee
-------------	------






W164 N9221 Water Street • P.O. Box 450 • Menomonee Falls, Wisconsin 53052-0450 • U.S.A. PHONE: 262.251.3800 800.558.8744 U.S.A./CANADA

www.alto-shaam.com



6-13/16" (173mm) Tray Slide 20-1/8" (512mm) 13" (331mm) To Elec. 20-1/8" (509mm) 20-1/8" (6509mm) 39-3/4" (1008mm)

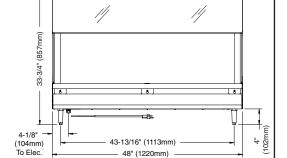


HFT2-300

20-1/8" (512mm) -4-7/16" (111mm) Well Well 9-13/16" (248mm) Reach 12-3/4" (322mm) 9-1/4" (233mm) Shelf Width 8" (203mm) Shelf Width 20-1/81 (178mm) (509mm) 26-1/8" (663mm) 39-3/4" (1008mm) // 11 (1536mm) 60-1/2" 23-1/2" (598mm) (lal) 42-5/8" (1081mm) 48" (1220mm)

HFT2SYS-300 (Standard)

HFT2-300 HOT FOOD TABLE

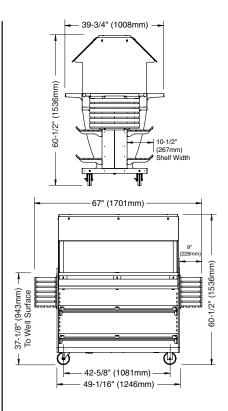

HFT2SYS-300 (Deluxe)

HFT2	200		ATDI	
BFI2		ELE	CIRI	LAL

VOLTAGE	PHASE	CYCLE/HZ	AMPS	kw	PLUG CONFIGURATION
208 – 240	1	60	13.0 – 15.0	2.7 – 3.6	NEMA 6-20P 20A - 250V PLUG
230	1	50	14.7	3.4	CEE 7/7, 220-230V plug

WEIGHT

	HFT2-300	HFT2SYS-300 (Std.)	HFT2SYS-300 (Dlx.)
NET:	160 lbs (73 kg)	286 lbs (130 kg)	430 lbs (195 kg)
SHIP:	280 lbs (127 kg)	365 lbs (166 kg)	509 lbs (231 kg)

CRATE DIMENSIONS: (L X W X H)

HFT2-300 - CONTACT FACTORY

HFT2SYS-300 - 60" x 38" x 68" (1524mm x 965mm x 1727mm)

INSTALLATION REQUIREMENTS

Hot food table must be installed level. The table must not be installed in any area where it may be affected by steam, grease, dripping water, high temperatures, or any other severely adverse conditions.

Do not install a hot food table near a cold air source such as a freezer, air conditioning vents, or in any area where outside air fluctuation can affect performance.

CLEARANCE REQUIREMENTS

NO CLEARANCE REQUIRED

DIMENSIONS (H X W X D)

HFT2-300 EXTERIOR:

33-3/4" x 48" x 39-3/4" (857mm x 1220mm x 1008mm)

HFT2SYS-300 (STANDARD) EXTERIOR:

60-1/2" x 48" x 39-3/4" (1536mm x 1220mm x 1008mm)

HFT2SYS-300 (DELUXE) EXTERIOR:

60-1/2" x 67" x 39-3/4" (1536mm x 1701mm x 1008mm)

HOT WELL DIMENSIONS (H X W X D):

4-7/16" x 38" x 20-1/8" (111mm x 964mm x 512mm)

PRODUCT\PAN CAPACITY

62 lb (30 kg) maximum (based on 4" (100mm) deep pans) max. volume: 45 qt (57 L)

FULL-SIZE PANS*: Three (3) 12" x 20" x 4"

GN 1/1 (325mm x 530mm x 102mm)

HALF-SIZE PANS*: Six (6) 12" x 10" x 4"

GN 1/2 (325mm x 265mm x 102mm)

THIRD-SIZE PANS*: Nine (9) 12" x 6" x 4"

GN 1/3 (325mm x 176mm x 102mm)

*WILL ALSO ACCEPT 2-1/2" (65mm) DEEP PANS. PANS NOT INCLUDED.

OPTIONS & ACCESSORIES

Pan Divider Bars	
☐ Full-Size	16019
□ Half-Size • Third-Size	11318



W164 N9221 Water Street • P.O. Box 450 • Menomonee Falls, Wisconsin 53052-0450 • U.S.A.

PHONE: 262.251.3800 800.558.8744 U.S.A./CANADA

FAX: 262.251.7067 800.329.8744 U.S.A. ONLY

