

HSM Series Heated Shelf Merchandiser



Featuring exclusive Halo Heat® fanless technology, Alto-Shaam heated shelf merchandisers provide precise, even heating for the highest quality food and lowest cost of ownership.

The HSM holds a variety of grab-and-go products, including rotisserie chickens, pizza, sandwiches, and more. Improve store profits with hot, ready-to-eat meals. Convenient, fresh meals are displayed in an aesthetically pleasing, customizable merchandiser.

Experience better quality food with gentle, even and precise Halo Heat® fanless technology to keep food from drying out.

Flexibility to control individual shelf temperatures allows you to hold a variety of products at the proper temperature.

Boost impulse sales with LED-lighted shelves, backlit interchangeable graphics, and pricing rails.

Simple operation and easy cleaning keeps delis and grab-and-go areas operating smoothly.

Lowest cost of ownership on the market – cost savings of 50% compared to traditional models.

Easy-to-load shelves – pass-through option available for added convenience.

Made in the USA with a commitment to quality. Alto-Shaam is ISO 9001:2015-certified.



HSM-48/5S

Images include optional accessory signage panels

HSM-24/5S

Standard Features

- Adjustable thermostat with a heat-on indicator light
- Latched access panel on the front of the merchandiser
- Four (4) 3" (76mm) casters

Capacity



- 20** **HSM-24/5S:** Five (5) 20-7/8" (530mm) width shelves, four (4) chicken boats with dome cover per shelf.
- 30** **HSM-36/5S:** Five (5) 32-7/8" (835mm) width shelves, six (6) chicken boats with dome cover per shelf.
- 50** **HSM-48/5S:** Five (5) 44-7/8" (1140mm) width shelves, ten (10) chicken boats with dome cover per shelf.



- | | | |
|-------------------|----------------|-------------------------|
| HSM-24/5S: | 80 lb (36 kg) | 16 lb (7 kg) per shelf |
| HSM-36/5S: | 120 lb (54 kg) | 24 lb (11 kg) per shelf |
| HSM-48/5S: | 200 lb (91 kg) | 40 lb (18 kg) per shelf |

Configurations (select one)

Model

- HSM-24/5S
- HSM-36/5S (not shown)
- HSM-48/5S

Electrical

- 208-240V, 1PH
- 230V, 1 PH

Style

- Reach-in
- Pass-through

Door Options

- None (reach-in models only)
- Rear slide (pass-through models only)
- Rear swing (pass-through models only)
- Front swing (reach-in and pass-through models)

Casters or Legs

- 3" (76mm) casters for floor standing application (Standard)
- 6" (152mm) feet for floor standing application (FE-27153)

Accessories (select all that apply)

Unit ships without graphics unless selected

- Signage panel, POP Display
- Signage panel, shelf – Rotisserie Chicken
- Signage panel, shelf – Hot Sandwiches
- Signage panel, shelf – Barbecue Ribs
- Signage panel, shelf – Hot & Tasty
- Signage panel, shelf – Grab & Go
- Signage panel, shelf – Hot & Fresh

qty



Shelf insert for magnetic signage panels

Magnetic signage panels to be provided by customer.

- | | |
|---|---|
| HSM-24 - <input type="checkbox"/> Stainless Steel (1027304) | <input type="checkbox"/> Black (PE-46057) |
| HSM-36 - <input type="checkbox"/> Stainless Steel (1027305) | <input type="checkbox"/> Black (PE-46058) |
| HSM-48 - <input type="checkbox"/> Stainless Steel (1027306) | <input type="checkbox"/> Black (PE-46059) |


Wire shelf

- HSM-24 (SH-46066)
- HSM-36 (SH-46067)
- HSM-48 (SH-46068)

HSM Series Heated Shelf Merchandiser



Dimension Drawings

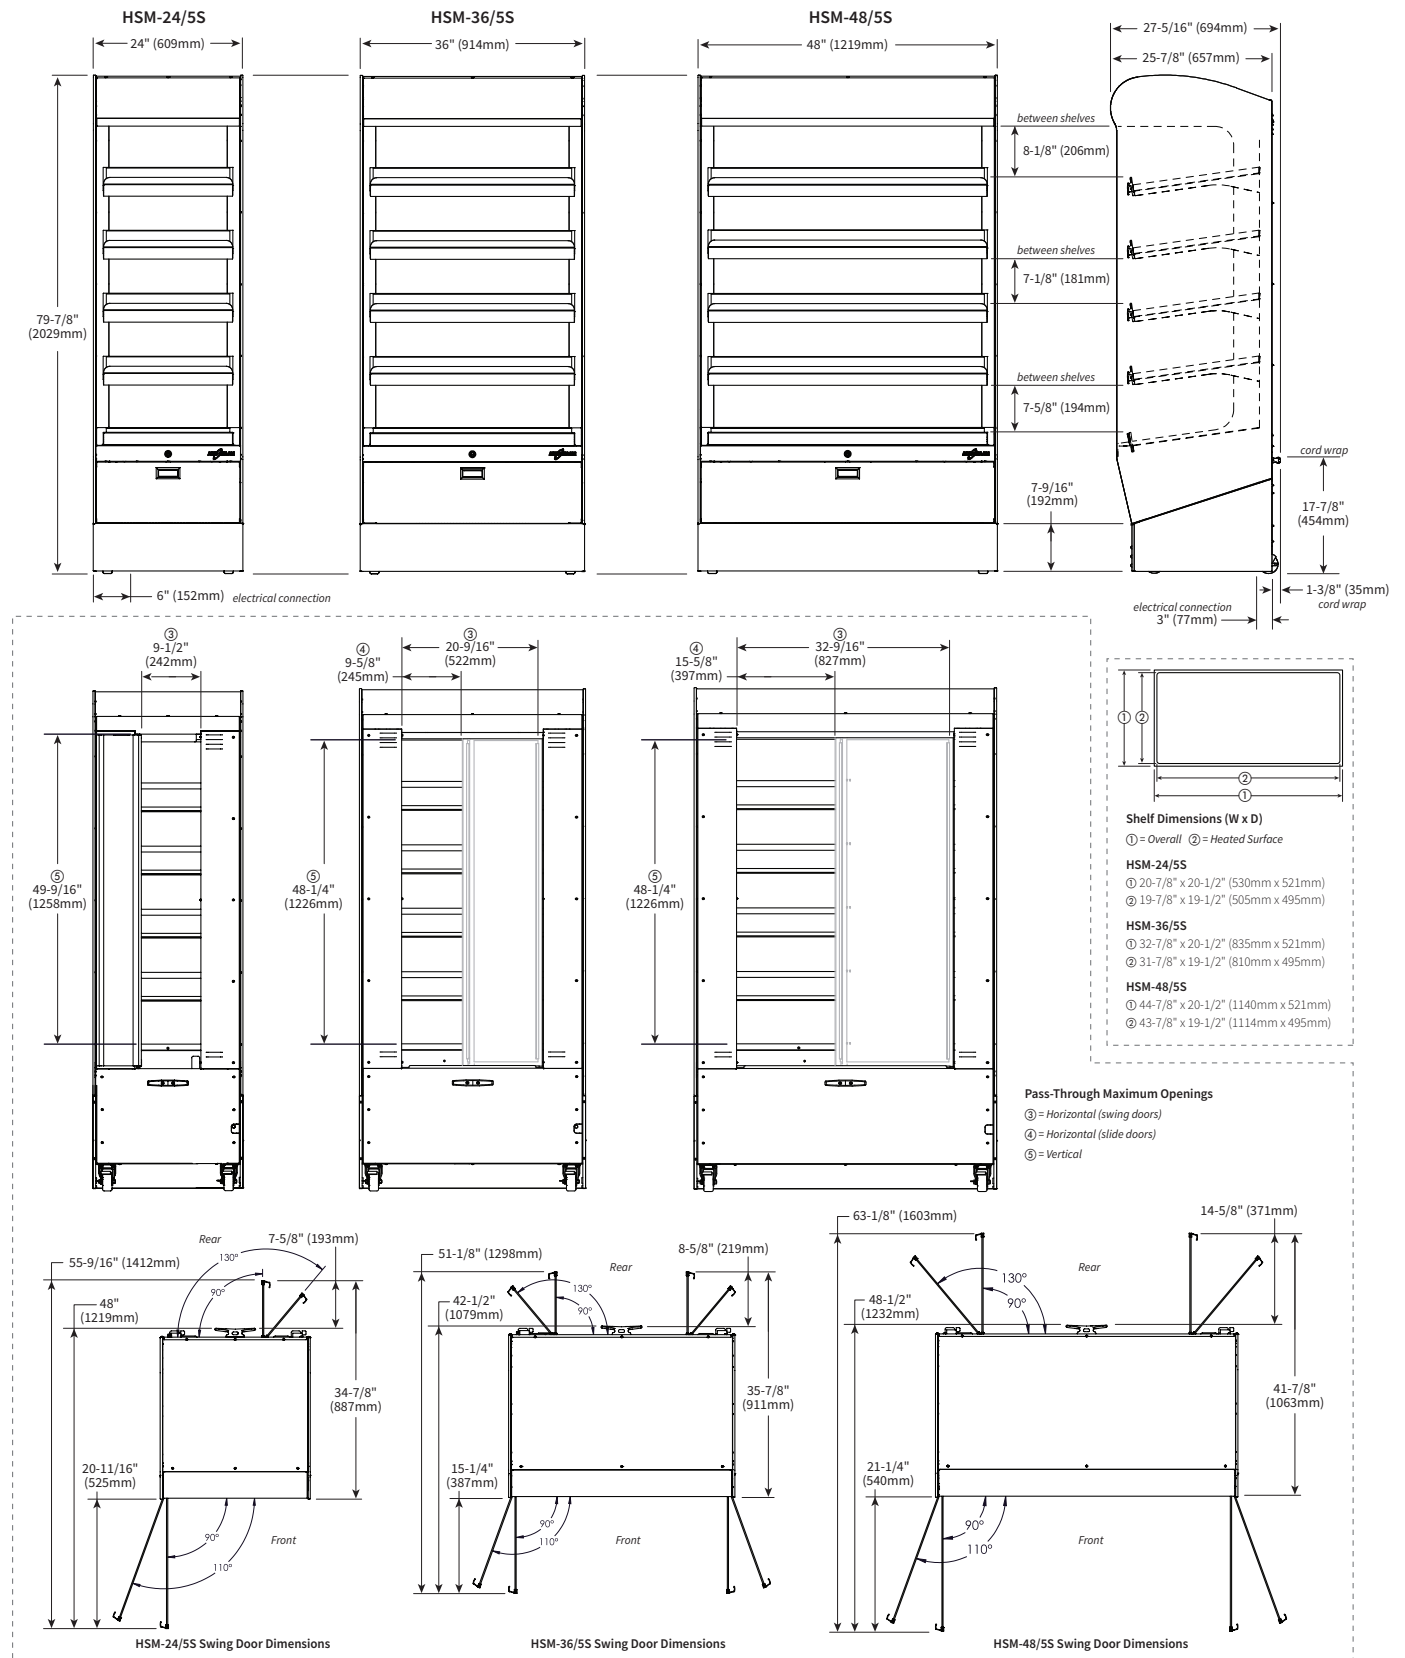

HSM Series Heated Shelf Merchandiser



Specifications



Model	Exterior (H x W x D)	Net Weight
HSM-24/5S	79-7/8" x 24" x 27-5/16" (2029mm x 609mm x 694mm)	406 lb (184 kg)
HSM-36/5S	79-7/8" x 36" x 27-5/16" (2029mm x 914mm x 694mm)	496 lb (225 kg)
HSM-48/5S	79-7/8" x 48" x 27-5/16" (2029mm x 1219mm x 694mm)	563 lb (255 kg)

	Ship Dimensions (L x W x H)*	Ship Weight*
HSM-24/5S	36" x 36" x 89" (914mm x 914mm x 2261mm)	550 lb (249 kg)
HSM-36/5S	56" x 45" x 89" (1422mm x 1143mm x 2261mm)	652 lb (296 kg)
HSM-48/5S	56" x 63" x 89" (1422mm x 1600mm x 2261mm)	772 lb (350 kg)

*Domestic ground shipping information. Contact factory for export weight and dimensions.




- Merchandiser must be installed level.
- Merchandiser must not be installed in any area where it may be affected by steam, grease, dripping water, high temperatures, or any other severely adverse conditions.
- In order to maintain NSF standards, floor models must be equipped with casters or 6" (152mm) legs.



Rear: 4" (102mm)
Recommended: 18" (457mm) for service access. Charges in connection with inadequate service access is not covered under warranty.



	V	Ph	Hz	A	kW	Plug Configuration
HSM-24/5S	208 - 240	1	60	10.8 - 12.5	2.2 - 3.0	NEMA 6-20P (20A, 250V)
	230	1	50/60	11.5	2.9	CEE 7/7 CH2-16P BS 1363
HSM-36/5S	208 - 240	1	60	14.4 - 16.7	3.0 - 4.0	cord, no plug
	230	1	50/60	15.0	3.5	CEE 7/7 CH2-16P BS 1363
HSM-48/5S	208 - 240	1	60	19.0 - 21.9	4.0 - 5.3	cord, no plug
	230	1	50/60	20.0	4.6	cord, no plug



CE IP X4

CONTACT US

W164 N9221 Water Street | Menomonee Falls, Wisconsin 53051 | U.S.A.
Phone: 262.251.3800 | 800.558.8744 U.S.A./Canada | Fax: 262.251.7067 | alto-shaam.com