



A Division of The Legacy Companies

Project Name:	
Location:	
Item:	Qty:
Model:	

## MODEL UC-20

## UNDERCOUNTER DISHWASHER

### FEATURES:

- The Largest Door Opening in the industry at 18-5/16"
- 18 gauge Stainless Steel tank construction
- Up to 45 Racks per Hour
- All stainless steel, interchangeable Upper and Lower wash and rinse arms – easily removable for easy cleaning
- Built-in 6.6 kW booster
- Water consumption as low as 0.68 gallons per rack
- Quiet (low dB) Wash and Rinse
- 1.2 kW wash tank heater
- Built-in Detergent and Rinse Aid dispensers with hook-up provided
- Pump Drain provides versatility for installation locations
- Fully insulated wash compartment provides superior energy savings through consistent heating
- Cool-to-the-touch exterior
- Door Safety Switch
- Automatic tank fill with liquid level safety switch
- Stainless steel filters to protect Wash Pump
- Seven independent cycles: economy, economy plus, glassware, flatware, dishware, pot & pan, and programmable
- Intuitive Digital Display with cycle indicator light provides simplified Operational Instructions and allows for long range visibility
- Power Saving mode automatically regulates and reduces energy consumption if unit is left unattended for over 30 minutes.



### OPTIONAL EQUIPMENT:

- Final rinse pump
- Modification Kit for 18 x 26 pans
- Locking Latch for Shipboard Use
- Flanged feet for Shipboard Use






A Division of The Legacy Companies

Project Name:	
Location:	
Item:	Qty:
Model:	

## MODEL UC-20

## UNDERCOUNTER DISHWASHER

### DIMENSIONS

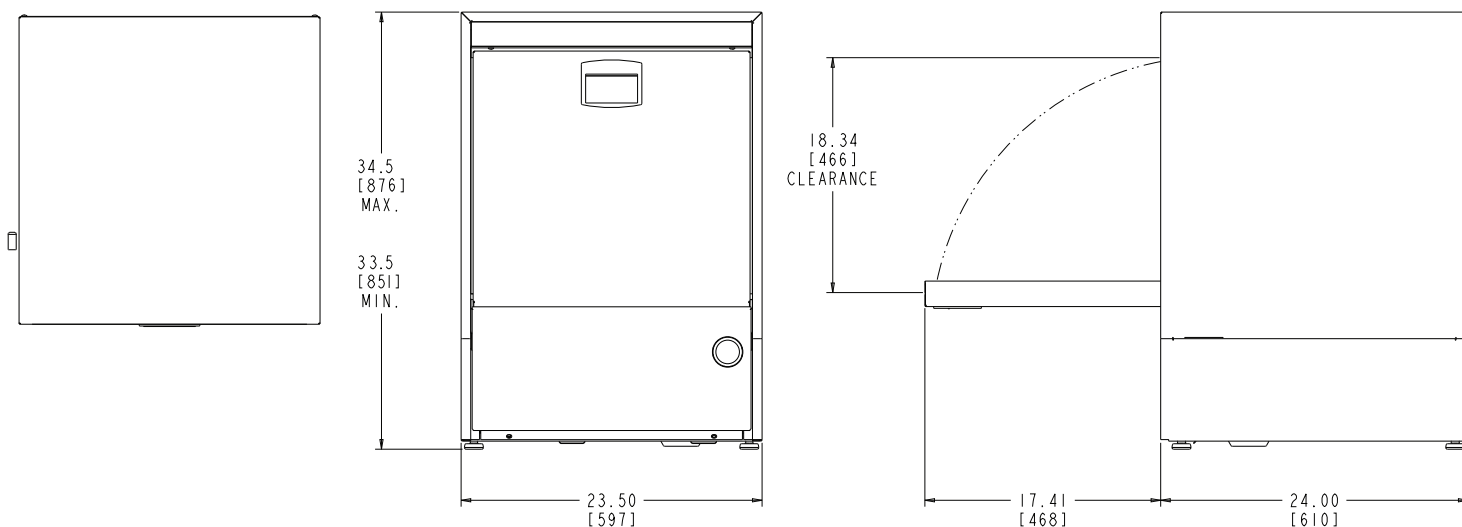

SPECIFICATIONS	
<b>RACK SIZES</b>	
DISH RACK	20" x 20"
FLAT RACK	20" x 20"
<b>MOTOR</b>	
HORSEPOWER	0.94
<b>APPROX. SHIPPING INFO</b>	
DIMENSIONS	30" x 30" x 42"
WEIGHT	140 lbs
<b>ELECTRIC</b>	
Voltage/Hertz/Phase	220-240/50-60/1
Total Amps	32.0 – 35.0
Voltage/Hertz/Phase	208-240/50-60/3
Total Amps	20.0 – 21.5
Voltage/Hertz/Phase	380-415/50-60/3
Total Amps	12.0

\*Other voltages available – contact factory

All specifications are subject to change

All specifications are dependent on water pressure and temperature

MODEL UC20	USA	METRIC
<b>WATER CONSUMPTION</b>		
PER RACK	0.68 – 0.8 (gal)	2.5 – 3.0 (l)
<b>OPERATING CYCLE</b>		
WASH TIME (sec)	55 -180	55 -180
RINSE TIME (sec)	15 – 20	15 – 20
DWELL TIME (sec)	10	10
TOTAL CYCLE (sec)	80 – 203	80 – 203
<b>OPERATING CAPACITY</b>		
RACKS PER HOUR	45 - 20	45 - 20
WASH TANK CAPACITY	1.8 (gal)	6.8 (l)
<b>CYCLE TEMPERATURES</b>		
WASH	155°F - 160°F	68°C - 71°C
RINSE	180°F - 195°F	82°C - 91°C
<b>WATER REQUIREMENTS</b>		
INLET TEMPERATURE	140°F	60°C
FLOW PRESSURE	20-25 psi	1.4 – 1.7 kg/cm2
WATER INLET CONNECTION	3/4" npt	3/4" npt
DRAIN CONNECTION	3/4" I.D.	3/4" I.D.