



ICEO926 ON B42

## Features

- Space-saving 22" (558 mm) wide design.
- Low profile design for difficult-to-fit applications.
- Produces up to 930 lbs (422 kg) of ice per day.
- *Harvest Assist* provides consistent ice production for the life of the ice maker while reducing energy consumption and increasing capacity.
- *Pure Ice®* exclusively by Ice-O-Matic. Built-in antimicrobial protection for the life of the ice maker inhibits bacteria growth on ice maker surfaces. Ice-O-Matic's optional water filtration system provides protection against unpleasant tastes, odors and scale formation.
- Durable, electroless nickel plating on all evaporator plates ensures reliability.
- *Longest optional warranty in the industry.* Purchase an Ice-O-Matic water filter with your cube ice maker, replace the filter every six months, and the evaporator warranty is extended to 7 years parts and labor (available in the U.S. and Canada only).
- ENERGY STAR® rated.

## Options

| WATER FILTERS     |          |             |        |
|-------------------|----------|-------------|--------|
| Ice Machine Model | Manifold |             | Inline |
|                   | System   | Replacement | System |
| ICEO926           | IFQI     | IOMQ (I)    | N/A    |

## Ice Maker Warranty

Every Ice-O-Matic ice maker is backed by a warranty that provides both parts and labor coverage.

- Three years **Parts** and **Labor**.
- Five years **Parts** coverage on the evaporator and compressor.
- Seven years **Parts** and **Labor** on the evaporator when you purchase an Ice-O-Matic water filter with your cube ice maker and replace the filter every six months (available in the U.S. and Canada only).

## Ice Form



### CUBE

| FULL CUBE DIMENSIONS |   |
|----------------------|---|
| W x D x H (in.)      | 7 <sup>5</sup> / <sub>8</sub> x 7 <sup>5</sup> / <sub>8</sub> x 7 <sup>5</sup> / <sub>8</sub> |
| W x D x H (mm)       | 22 x 22 x 22  |
| HALF CUBE DIMENSIONS |   |
| W x D x H (in.)      | 3 <sup>5</sup> / <sub>8</sub> x 7 <sup>5</sup> / <sub>8</sub> x 7 <sup>5</sup> / <sub>8</sub> |
| W x D x H (mm)       | 10 x 22 x 22  |

## Bin Chart Kits for Combining Wider Bins with Smaller Models


| ICE STORAGE BINS |           |                |                  |                  |                  |                  |                  |                   |                    |                    |                    |                    |
|------------------|-----------|----------------|------------------|------------------|------------------|------------------|------------------|-------------------|--------------------|--------------------|--------------------|--------------------|
| Kits             | Model No. | B25            | B40              | B42              | B55              | B70-30           | B90-30           | B100              | B120               | B130               | B150               | B170               |
|                  |           | Capacity       | 242 lbs (110 kg) | 344 lbs (156 kg) | 351 lbs (160 kg) | 510 lbs (232 kg) | 741 lbs (337 kg) | 1023 lbs (465 kg) | 854 lbs (388 kg)   | 1142 lbs (519 kg)  | 1457 lbs (661 kg)  | 1447 lbs (658 kg)  |
|                  | Width     | 30 in (762 mm) | 30 in (762 mm)   | 22 in (559 mm)   | 30 in (762 mm)   | 30" (762 mm)     | 30" (762 mm)     | 48 in (1219 mm)   | 48 in (1219 mm)    | 48 in (1219 mm)    | 60 in (1524 mm)    | 60 in (1524 mm)    |
| ICEO926          |           | KBT19          | KBT19            | Kit Not Required | KBT19            | KBT19            | KBT19            | KBT222*           | Kit Not Required** | Kit Not Required** | Kit Not Required** | Kit Not Required** |

See Ice-O-Matic Price List for Adapter Kits to combine ice makers with most available ice/beverage dispensers.

\*KBT222 only for dual iceheads.

\*\*No charge for Side by Side tops when ordered at time of purchase. Additional charges apply when ordered separately.



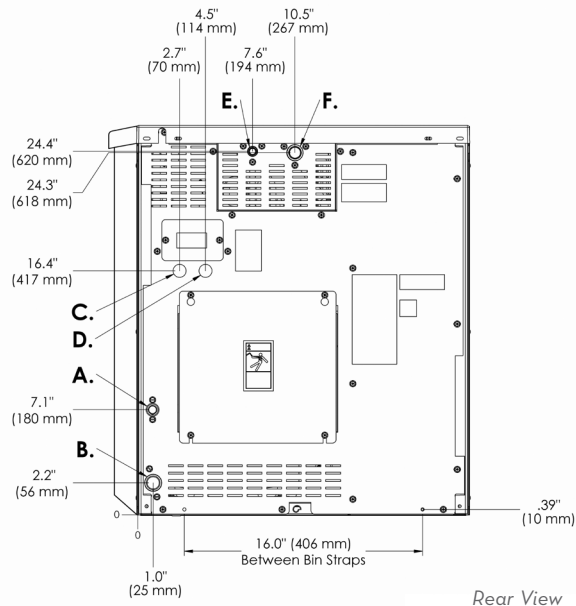

### Remote Cooled

- A. Ice maker potable water in, 3/8" FPT.
- B. Ice maker water out, 3/4" FPT.
- C. Hole for electrical connections, 7/8".
- D. Hole for remote electrical connection, 7/8".
- E. Liquid line, 3/8" male quick connect coupling for precharged line set.
- F. Discharge line, 1/2" male quick connect coupling for precharged line set.

### Operating Requirements

|                         | MINIMUM           | MAXIMUM           |
|-------------------------|-------------------|-------------------|
|                         |                   | <b>60 Hz</b>      |
| Ambient Temp. Range Air | 50°F (10°C)       | 100°F (38°C)      |
| Water Temp.             | 40°F (4.4°C)      |                   |
| Water Pressure          | 20 PSIG (1.4 BAR) | 60 PSIG (4.1 BAR) |

### Dimensions

| ALL MODELS      |                      |
|-----------------|----------------------|
| W x D x H (in.) | 22.3 x 24.25 x 26.06 |
| W x D x H (mm)  | 566 x 616 x 662      |

### Specifications

| Model Number | Cond. Unit | Ice Production per 24hrs     |                              | Water Usage gallons per 100 lbs of Ice 90°F air/70°F water |           | kWH Used per 100 lbs of ice @ 90°F air/70°F water | Voltage Characteristics | Min. Circuit Ampacity | Fuse Size | Approx. BTUs per hour** |
|--------------|------------|------------------------------|------------------------------|--|-----------|---|-------------------------|-----------------------|-----------|-------------------------|
|              |            | 70°F air/50°F water lbs (kg) | 90°F air/70°F water lbs (kg) | Potable  | Condenser |   |                         |                       |           |                         |
| ICEO926R★    | Remote*    | 930 (422)                    | 780 (354)                    | 20.0   | -         | 5.1   | 208-230/60/1            | 16.2                  | 20        | 17,200**                |

NOTES:

Number of Wires: 3 (including ground)  
 Approx. Shipping Weight lbs (kg): ICEO926: 215 (98)  
 Refrigerant Type: R404A

\*Requires Remote VRC2061 condenser and precharged line set.  
 \*\*BTUH is calculated 0°F Evaporator, 100°F Condensing, and 33 PSIG.

★ENERGY STAR qualified machine. Please see our website [www.iceomatic.com](http://www.iceomatic.com) for the latest list of ENERGY STAR qualified machines and available rebates

### Accessories

| Model Number | Description   |
|--------------|---|
| VRC2061B     | Remote condenser  |
| KIBDO1       | Ice Level Kit for Coke® Freestyle                               |
| RT325 404    | 25 ft. Precharged Tubing Kit for units using R-404A refrigerant |
| RT340 404    | 40 ft. Precharged Tubing Kit for units using R-404A refrigerant |
| RT360 404    | 60 ft. Precharged Tubing Kit for units using R-404A refrigerant |
| RT375 404    | 75 ft. Precharged Tubing Kit for units using R-404A refrigerant |