

CORRECTIONAL TRAY DELIVERY CART



Item Number: DXICSTO136

Item Numbers

- DXICSTO104
- DXICSTO136

Application

This product is made to transport meals in insulated trays, plus accompanying beverages, in configurations large enough to serve up to 136 meals per cart. These carts are designed and built to withstand the rigors of correctional handling while ensuring the optimum in temperature maintenance.

Construction

This tray cart is constructed of all stainless steel. The frame is 1.5" (4cm) square stainless steel tubing. The bottom shelf frame has four 1.5" (4cm) square tube members and one 1.5" (4cm) angle to provide tow strength integrity.

The top and bottom shelves are constructed of 14-gauge No. 301 stainless steel and are welded to all frame members.

The load capacity of the cart is one ton. Cart has a 1" (3cm) diameter stainless steel handle welded directly to the frame. Four 6" (15cm) diameter polyurethane casters (2 rigid and 2 swivel) are provided. Strap loops are .25" (.6cm) stainless steel rods welded to the lower frame as strap restraints. Cutouts permit securing of additional trays, boxes, or beverage containers for transport.

Cart includes three belts on DXICSTO104 and four belts on DXICSTO136 with over-center CAM buckle.

Standard Features

- Transports 2.5" x 13" x 15" insulated trays
- All stainless steel welded construction
- Load capacity is 2000 lb./cart
- Capacity is 72 to 136 trays/cart
- Designed to pass through 30" door or sally port
- Towable
- Inmate tough

Warranty

One year parts and labor.




DINEX[®]

Building 2, Suite 106
628 Hebron Avenue
Glastonbury, CT 06033
800.523.9752 Fax: 860.652.3135
www.dinex.com

048-REV 01/10

CORRECTIONAL TRAY DELIVERY CART

DXICSTO104

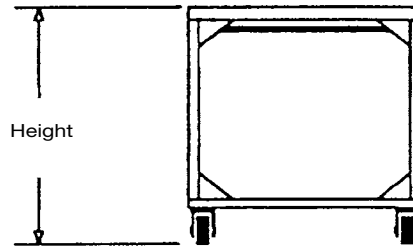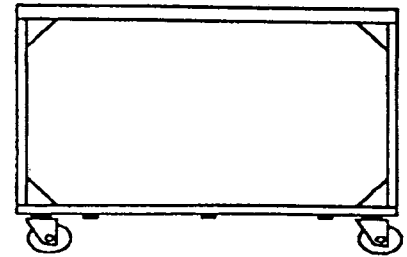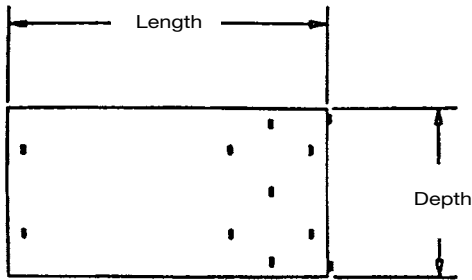

Items and Dimensions

ITEM NUMBER	MODEL NUMBER	LENGTH	DEPTH	HEIGHT	SHELF SIZE	SHIP WEIGHT	SHIP CUBE
DXICSTO104	ICSTO/104	49" (124.4cm)	28" (71.1cm)	47" (119.3cm)	Upper 27.75" x 48.75" (70cm x 124cm) Lower 27.75" x 45.75" (70cm x 116cm)	365 lb. (165.7kg)	44.3
DXICSTO136	ICSTO/136	64.50" (163.8cm)	28" (71.1cm)	47" (119.3cm)	Upper 27.75" x 64.25" (70cm x 163cm) Lower 27.75" x 61.25" (70cm x 156cm)	455 lb. (206.6kg)	57.5

Capacity DXICSTO104

Capacity: 71-104 trays per cart
 Lower Shelf: 72 correctional insulated trays (plus 6 covers)
 Upper Shelf: 24-32 trays, plus 2-5 gallon beverage containers

Options

Web Belt
 • 96" (244cm)

Capacity DXICSTO136

Capacity: 96-136 trays per cart
 Lower Shelf: 96 correctional insulated trays (plus 8 covers)
 Upper Shelf: 28-40 trays, plus 3-5 gallon beverage containers

Options / Accessories

- 8" (20cm) pneumatic casters (recommended for towing)
- Towing package (1 hook and 1 receiver)
- Additional belt with over-center CAM buckle
- Vertical corner bumpers (adds 2" (3cm) to length and width of cart)



Please confirm that you have the most current specification sheet by visiting www.dinex.com.
 Dinex® reserves the right to change specifications and product design without notice.
 Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

Printed in USA

DINEX®

Building 2, Suite 106
 628 Hebron Avenue
 Glastonbury, CT 06033
 800.523.9752 Fax: 860.652.3135
www.dinex.com

048-REV 01/10