

| JOB | ITEM # |
|-----|--------|
|-----|--------|

INDUCTION CHARGER TABLE



DXICTABLEM - shown with Smart•Therm® and Induction Bases

Application

The Dinex Induction Charger Table is designed to hold both the Smart-Therm® and the Turbo-Temp Induction Chargers as well as two stack of induction bases. Dinex offers stationary and mobile units (with and without casters).

Construction

Top is constructed of 14-gauge type 304 stainless steel with a No. 4 finish and has a full marine "V" edge. Top has 14-gauge under brace hat channels welded in place for additional support.

Legs are 1.625"(4cm) 16-gauge stainless steel round tubing fully welded to top hat channel under brace support and under shelf.

Under Shelf is constructed of 16-gauge type 304 stainless steel with a No. 4 finish welded to legs.

Mobile Units come with four 4"(10cm) swivel polyurethane casters, two with brakes.

Item Numbers


□ DXICTABLEM (Mobile, with casters)□ DXICTABLE (Stationary)

Warranty

One year parts and labor.



INDUCTION CHARGER TABLE

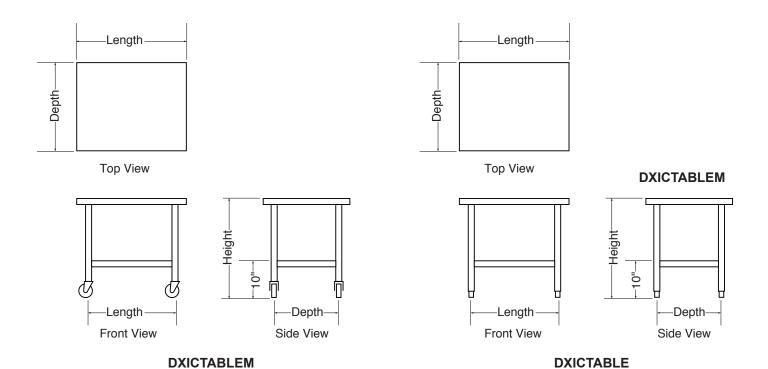

Specifications

| Item Number | Model Number | Overall Size | | | Freight | Shipping Specs | |
|----------------|-----------------|----------------|----------------|------------------|---------|----------------------|--------------|
| | | L | D | н | Class | Ship Weight | Ship Cube |
| DXICTABLEM | ICTABLEM | 30" (76 cm) | 24" (61 cm) | 30.5" (77 cm) | 125 | 210 lbs (95.3 kg) | 14.7 |
| DXICTABLE | ICTABLE | 30" (76 cm) | 24" (61 cm) | 30.5" (77 cm) | 125 | 210 lbs (95.3 kg) | 14.7 |

Please confirm that you have the most current specification sheet by visiting www.dinex.com. Dinex* reserves the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

