



Project:

Item Number:

Quantity:

SIGNATURE SERVER® : COLD FOOD STATION NSF STANDARD 7



Base pictured with stainless corner strips for laminate finish. Shown with 4 food pans inside a single well.

DESCRIPTION

- Vollrath's NSF Standard 7 Cold Food Station is constructed of 18-gauge stainless steel clad with optional laminate finish. All exposed stainless steel is polished with #4 finish or equal.
- Unit is mounted on 4" (10.16 cm) diameter swivel casters with non-marking treads.
- Food well opening is recessed 3" (7.62 cm) below work surface and is 6 5/8" (16.83 cm) deep (total 9 5/8" [24.45 cm]).
- Seamless pan well is 18-gauge stainless steel.
- Tops are attached with threaded studs to underside of top.
- Refrigeration coils are attached to exterior sidewalls of well and step-down recess.
- Compressor is mounted below body:
 - 46" units – 1/5 HP compressor
 - 60" units – 1/4 HP compressor
 - 74" units – 1/3 HP compressor
 - 88" units – 1/2 HP compressor
- Furnished with an 8' (243.84 cm) power cord with a 3-wire NEMA 5-15P or 5-20P, 3-prong grounded plug.
- Inner body is fully insulated with thick foamed-in-place polyurethane insulation.
- Integral drain exits through side of base.
- Available in 120V, 1 Phase AC only.

LIGHTING (Requires Breath Guard) (Bulbs not included)

Incandescent/Infrared (Bulbs not included)

Note: Cannot be specified for standard cafeteria breath guards. Attractively display and merchandise food or provide heat from above.

- 36431 46" (116.84 cm) Length
- 36432 60" (152.40 cm) Length
- 36433 74" (187.96 cm) Length
- 98625 88" (223.52 cm) Length

Fluorescent (Bulbs not included)

Illuminates food attractively while providing more room under breath guard. Includes shield for light tube.

- 36421 46" (116.84 cm) Length
- 36422 60" (152.40 cm) Length
- 36423 74" (187.96 cm) Length
- 98622 88" (223.52 cm) Length

Agency Certifications



MODELS

Finish	Length	46" (116.84)		60" (152.40)		74" (187.96)		88" (223.52)	
	Height	30" (76.20)	34" (86.36)	30" (76.20)	34" (86.36)	30" (76.20)	34" (86.36)	30" (76.20)	34" (86.36)
Black Laminate		36146	37046	36166	37066	36176	37076	N/A	98710
Optional Laminate		36680		36681		36682		98835	
Woodgrain		36687		36688		36689		98835	
All Stainless		36693		36694		36695		98836	

BREATH GUARD

Cafeteria Breath Guard


Single Shelf

Twelve inch (30.48 cm) wide shelf is constructed of 18-gauge stainless steel and front panel is heavy-duty 1/4" (.63 cm) clear acrylic. Serving shelf and acrylic panel attach to 1" (2.54 cm) square tubular stainless steel uprights.



Double Shelf

Top shelf is 18-gauge stainless steel and 12" (30.48 cm) wide. Intermediate shelf is 1/4" (.63 cm) acrylic. Shelves mounted to 1" (2.54 cm) square tubular stainless steel uprights. Breath guards are 1/4" (.63 cm) clear acrylic and pivot to provide access to serving areas.



Length

- 46" (116.84 cm)
- 60" (152.40 cm)
- 74" (187.96 cm)
- 88" (223.52 cm)

Single Shelf


- 37311
- 37312
- 37313
- 9861006

Double Shelf

- 37321
- 37322
- 37323
- 9861707

Access® Breath Guard

Top shelf constructed of 18-gauge stainless steel with optional laminate. Side and end panels constructed of 1/4" (.63 cm) clear acrylic. Uprights built of 18-gauge stainless steel. Provides 12" (30.48 cm) height clearance/serving opening when in use. Adjustable Access Breath Guard provides serving opening range of 9"-15" (22.8-38.1 cm) in one inch increments. NSF certified.



Length

- 46" (116.84 cm)
- 60" (152.40 cm)
- 74" (187.96 cm)
- 88" (223.52 cm)

Adjustable

- 36343
- 36363
- 36373
- N/A

Non-Adjustable

- 36341
- 36361
- 36371
- 9860206

Buffet Breath Guard

Constructed of 18-gauge 1" (2.54 cm) square tubular stainless steel uprights. Panels made of 1/4" (.63 cm) clear acrylic. Side panels provide 12" (30.48 cm) clearance/serving opening when attached to Vollrath Signature Server® Base.



- 36301 46" (116.84 cm)
- 36302 60" (152.40 cm)

- 36303 74" (187.96 cm)
- 98607 88" (223.52 cm)

Optional powdercoat or brass breath guards available. Contact the factory.

Approvals

Date:

--



Setting the Standard™

www.vollrathco.com

The Vollrath Company, L.L.C.
 1236 North 18th Street
 Sheboygan, WI 53081-3201
 U.S.A.
 Main Tel: 800.628-0830
 Service Tel: 800.628.0832
 FAX: 800.752.5620


Vollrath of Canada, Co
 Tel: 800.695.8560
 FAX: 800.752.5620

SIGNATURE SERVER® : COLD FOOD STATION NSF STANDARD 7

ACCESSORIES AND ADD ONS

V-Rib Tray Slide with Mounting Kit


Constructed of 18-gauge stainless steel with 4 ribs. 12½" (31.75 cm) wide with 1" (2.54 cm) turned down flange. Locking brackets on each end to join stations together. Adds 4" (10.16 cm) to width of unit in folded position.



- 37522 46" (116.84 cm) Length
- 37523 60" (152.40 cm) Length
- 37524 74" (187.96 cm) Length
- 98831 88" (223.52 cm) Length

Tubular Tray Slide with Mounting Kit

Constructed of 18-gauge stainless steel. 11½" (29.21 cm) wide. Locking brackets on each end to join stations together. Adds 4" (10.16 cm) to width of unit in folded position.



- 9882003 46" (116.84 cm) Length
- 9882004 60" (152.40 cm) Length
- 9882005 74" (187.96 cm) Length
- 9882006 88" (223.52 cm) Length

Stationary Legs

Constructed of plated metal. Threaded insert with height adjustment of 1" (2.54 cm).




Adjustable from 4" to 5" (10.16 cm to 12.7 cm)

- 36921 Adjustable 4" to 5" (10.16 to 12.7 cm)
- 2897451-2 Four inch (10.16 cm) Leg
- 2897452-2 Six inch (15.24 cm) Leg

End Shelf – Must be factory installed


Constructed of 18-gauge stainless steel with fold-down style mounting bracket. Attaches to 46" (116.84 cm), 60" (152.40 cm), 74" (187.96 cm) and 88" (223.52 cm) Signature Server®. Adds 4½" (11.43 cm) to length of unit in folded position. 40 lb (18.2 kg) capacity.



- 37570 End Shelf, 18" x 28" (45.72 cm x 71.12 cm)

Plate Rest with Mounting Kit

Made of 18-gauge stainless steel with fold-down style mounting bracket. 7" (17.78 cm) wide with 1" (2.54 cm) turned down flange. Locking brackets on each end to join stations together. Adds 4" (10.16 cm) to width of unit in folded position.



- 37512 46" (116.84 cm) Length
- 37513 60" (152.40 cm) Length
- 37514 74" (187.96 cm) Length
- 98829 88" (223.52 cm) Length

Cutting Board

Wood cutting board made of 1½" (2.86 cm) thick sectional kiln dried maple. Poly cutting board is 1" (2.54 cm) thick. Both NSF certified. Boards have chrome plate fold-down style mounting brackets. Removable without tools. Adds 4" (10.16 cm) to width of unit in folded position. Overall width is 8" (20.3 cm).



- 37551 Wood, 46" (116.84 cm)
- 37552 Wood, 60" (152.40 cm)
- 37553 Wood, 74" (187.96 cm)
- 98851 Wood, 88" (223.52 cm)
- 37561 Poly, 46" (116.84 cm)
- 37562 Poly, 60" (152.40 cm)
- 37563 Poly, 74" (187.96 cm)
- 98852 Poly, 88" (223.52 cm)

False Bottom

Helps ice keep longer, reducing labor. This sturdy, perforated rack fits any size cold food server well, to allow melted ice to drain away from pan or containers.

- 36914 46" (116.84 cm)
- 36915 60" (152.40 cm), 2 Piece
- 36916 74" (187.96 cm), 3 Piece
- 98855-2 88" (223.52 cm), 4 Piece


NOTES:

Signature Server® equipment orders cannot be canceled or returned. In the interest of continued improvement, we reserve the right to change specifications without notice.

DIMENSIONS– IN INCHES (CM)

Length	Top Opening Dimensions	
	Top Work Surface	Seamless Display Pan Well
46" (116.84)	38¼" x 21⅞" (98.42 cm x 55.56 cm)	19⅞" x 37½" x 6⅝" deep (50.48 cm x 95.25 cm x 16.83 cm)
60" (152.40)	51½" x 21⅞" (130.8 cm x 55.56 cm)	19⅞" x 50¼" x 6⅝" deep (50.48 cm x 127.64 cm x 16.83 cm)
74" (187.96)	64¼" x 21⅞" (163.19 cm x 55.56 cm)	19⅞" x 63" x 6⅝" deep (50.48 cm x 160.02 cm x 16.83 cm)
88" (223.52)	77" x 21⅞" (195.58 cm x 55.56 cm)	19⅞" x 75¾" x 6⅝" deep (50.48 cm x 192.40 cm x 16.83 cm)

Custom Design

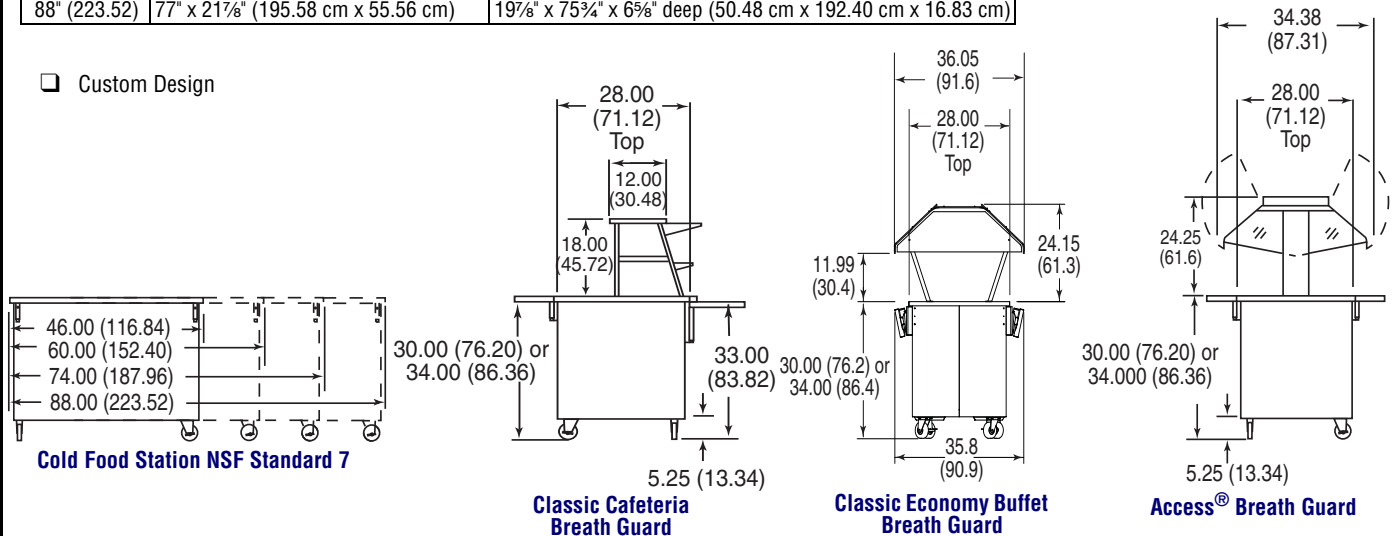

For additional options, log onto www.vollrathco.com and click on Concept™.



The Vollrath Company, L.L.C.
1236 North 18th Street
Sheboygan, WI 53081-3201
U.S.A.
Main Tel: 800.628-0830
Service Tel: 800.628.0832
FAX: 800.752.5620

Vollrath of Canada, Co
Tel: 800.695.8560
FAX: 800.752.5620