



Project:

Item Number:

Quantity:

MODULAR DROP-IN: SOUP WELL



Modular Drop-In: Soup Well

DESCRIPTION

The modular drop-in is designed for top-mount installation and does not require hard-wiring. The drop-in comes complete with a 6 ft. (182.8 cm) power cord with plug and a 4 ft. (122 cm) control cord for remote installation.

Flat flange with gasket ensures firm fit against countertop.

4 qt. soup wells use 480W elements and 7 qt. and 11 qt. use 720W elements for efficient low cost operation.

Stainless steel drain nipple is welded to interior well to ensure long service life.

Stainless steel wells are designed to hold appropriate size vegetable insets and allow sufficient water capacity to ensure maximum moist heat operation.

MODELS

Model	Size	Voltage	Control	Drain
36460	4 1/8 qt.	100-120V	Infinite Control	Standard
36461	4 1/8 qt.	208-240V	Infinite Control	Standard
36462	7 1/4 qt.	100-120V	Infinite Control	Standard
36463	7 1/4 qt.	208-240V	Infinite Control	Standard
36464	11 qt.	100-120V	Infinite Control	Standard
36465	11 qt.	208-240V	Infinite Control	Standard
3646010	4 1/8 qt.	100-120V	Thermostatic Control	Standard
3646110	4 1/8 qt.	208-240V	Thermostatic Control	Standard
3646210	7 1/4 qt.	100-120V	Thermostatic Control	Standard
3646310	7 1/4 qt.	208-240V	Thermostatic Control	Standard
3646410	11 qt.	100-120V	Thermostatic Control	Standard
3646510	11 qt.	208-240V	Thermostatic Control	Standard

FEATURES

- Top is 22-gauge stainless steel, 18-8 Type 304.
- Molded breaker gasket fitted under drip-edge.
- Flat work surface around opening.
- Deep-drawn well is 22-gauge, 18-8 stainless steel.
- 4 qt. soup wells use 480W elements and 7 qt. and 11 qt. use 720W elements for efficient low cost operation.
- Standard drain is 3/4" (1.9 cm) stainless steel fitting welded to pan with ball valve shutoff below exterior housing.
- Exterior housing is 22-gauge stainless steel.
- Drop-in supplied with stainless steel control panel.
- Control wires contained in flexible rubber cord.
- Unit comes with cord and plug and does not require hard-wiring installation.
- Full one-year parts and labor warranty.

Agency Listings



Approvals

Date:



Setting the Standard™

www.vollrathco.com

The Vollrath Company, L.L.C.
1236 North 18th Street
Sheboygan, WI 53081-3201
U.S.A.
Main Tel: 800.628-0830
Service Tel: 800.628.0832
FAX: 800.752.5620

Vollrath of Canada, Co.
Tel: 800.695.8560
FAX: 800.752.5620


MODULAR DROP-IN: SOUP WELL

MODELS




Model	Size	Voltage	Control	Drain	Model	Size	Voltage	Control	Drain
36460	4 1/8 qt.	100-120V	Infinite Control	Standard	3646010	4 1/8 qt.	100-120V	Thermostatic Control	Standard
36461	4 1/8 qt.	208-240V	Infinite Control	Standard	3646110	4 1/8 qt.	208-240V	Thermostatic Control	Standard
36462	7 1/4 qt.	100-120V	Infinite Control	Standard	3646210	7 1/4 qt.	100-120V	Thermostatic Control	Standard
36463	7 1/4 qt.	208-240V	Infinite Control	Standard	3646310	7 1/4 qt.	208-240V	Thermostatic Control	Standard
36464	11 qt.	100-120V	Infinite Control	Standard	3646410	11 qt.	100-120V	Thermostatic Control	Standard
36465	11 qt.	208-240V	Infinite Control	Standard	3646510	11 qt.	208-240V	Thermostatic Control	Standard

DIMENSIONS


□ Dimensions shown in inches (cm).

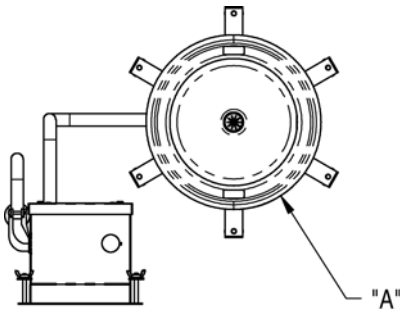

Control Panel Cutout

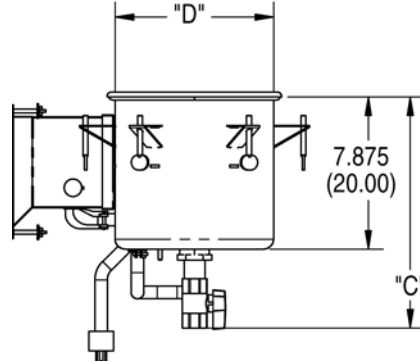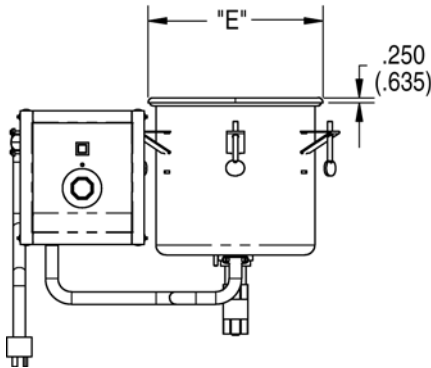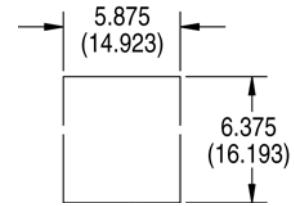

Round Well Cutout



Item	Capacity	A	B	C	D	E	Voltage	Watts	Amps	Plug	Receptacle
36460 3646010	4 1/8 qt.	8.813 (22.385)	8.250 (20.955)	11.672 (29.647)	8.000 (20.32)	8.813 (22.385)	120V, 50/60 Hz	480	4.0	5-15P	5-15R
36461 3646110	4 1/8 qt.	8.813 (22.385)	8.250 (20.955)	11.672 (29.647)	8.000 (20.32)	8.813 (22.385)	208/240V, 50/60 Hz	480-640	2.3 - 2.7	6-15P	6-15R
36462 3646210	7 1/4 qt.	11.188 (28.418)	10.562 (26.827)	11.672 (29.647)	10.312 (26.192)	11.188 (28.418)	120V, 50/60 Hz	720	6.0	5-15P	5-15R
36463 3646310	7 1/4 qt.	11.188 (28.418)	10.562 (26.827)	11.672 (29.647)	10.312 (26.192)	11.188 (28.418)	208/240V, 50/60 Hz	720-960	3.5 - 4.0	6-15P	6-15R
36464 3646410	11 qt.	12.813 (32.545)	12.250 (31.115)	11.672 (29.647)	12.00 (30.48)	12.813 (32.545)	120V, 50/60 Hz	720	6.0	5-15P	5-15R
36465 3646510	11 qt.	12.813 (32.545)	12.250 (31.115)	11.672 (29.647)	12.00 (30.48)	12.813 (32.545)	208/240V, 50/60 Hz	720-960	3.5 - 4.0	6-15P	6-15R



www.vollrathco.com

The Vollrath Company, L.L.C.
 1236 North 18th Street
 Sheboygan, WI 53081-3201
 U.S.A.
 Main Tel: 800.628-0830
 Service Tel: 800.628.0832
 FAX: 800.752.5620

Vollrath of Canada, Co.
 Tel: 800.695.8560
 FAX: 800.752.5620