



Outperform every day.™

Project:

Item Number:

Quantity:

## MODULAR DROP-IN: SOUP WELL



Modular Drop-In: Soup Well

### DESCRIPTION

The modular drop-in is designed for top-mount installation and does not require hard-wiring. A flat flange with gasket ensures firm fit against the countertop.

Stainless steel drain nipple is welded to the interior well to ensure long service life.

Stainless steel wells are designed to hold appropriate size vegetable insets and allow sufficient water capacity to ensure maximum moist heat operation.

### MODEL

36462	7¼ Qt. Infinite Control (US/Canada)
36463	7¼ Qt. Infinite Control (US/Canada)
36464	11 Qt. Infinite Control (US/Canada)
36465	11 Qt. Infinite Control (US/Canada)
3646210	7¼ Qt. Thermostatic Control (US/Canada)
3646310	7¼ Qt. Thermostatic Control (US/Canada)
3646410	11 Qt. Thermostatic Control (US/Canada)
3646510	11 Qt. Thermostatic Control (US/Canada)

### FEATURES

- Top is 22-gauge 18-8 stainless steel, Type 304
- Exterior housing is 22-gauge stainless steel
- Deep-drawn well is 22-gauge, 18-8 stainless steel
- Molded breaker gasket fitted under drip-edge
- Flat work surface around opening
- Standard drain is ¾" (1.9 cm) stainless steel fitting welded to pan with ball valve shutoff below exterior housing
- Drop-in supplied with stainless steel control panel
- 720W elements for efficient low cost operation
- Unit comes with cord and plug and does not require hard-wiring installation
- 6-foot (183 cm) power cord
- Full one-year parts and labor warranty

### Agency Listings



Due to continued product improvement, please consult [www.vollrath.com](http://www.vollrath.com) for current product specifications.

**WARRANTY:** All models shown come with Vollrath's standard warranty against defects in materials and workmanship. For full warranty details, please refer to [www.Vollrath.com](http://www.Vollrath.com).

Approvals	Date




Outperform every day.™  
[www.vollrath.com](http://www.vollrath.com)

The Vollrath Company, L.L.C.  
1236 North 18th Street  
Sheboygan, WI 53081-3201 U.S.A.  
Customer Service: 800.628.0830  
Canada Customer Service: 800.695.8560  
Main Fax: 800.752.5620 or 920.459.6573

Technical Services: 800.628.0832  
Technical Services Fax: 920.459.5462

# MODULAR DROP-IN: SOUP WELL


## DIMENSIONS (Shown in inches (cm))

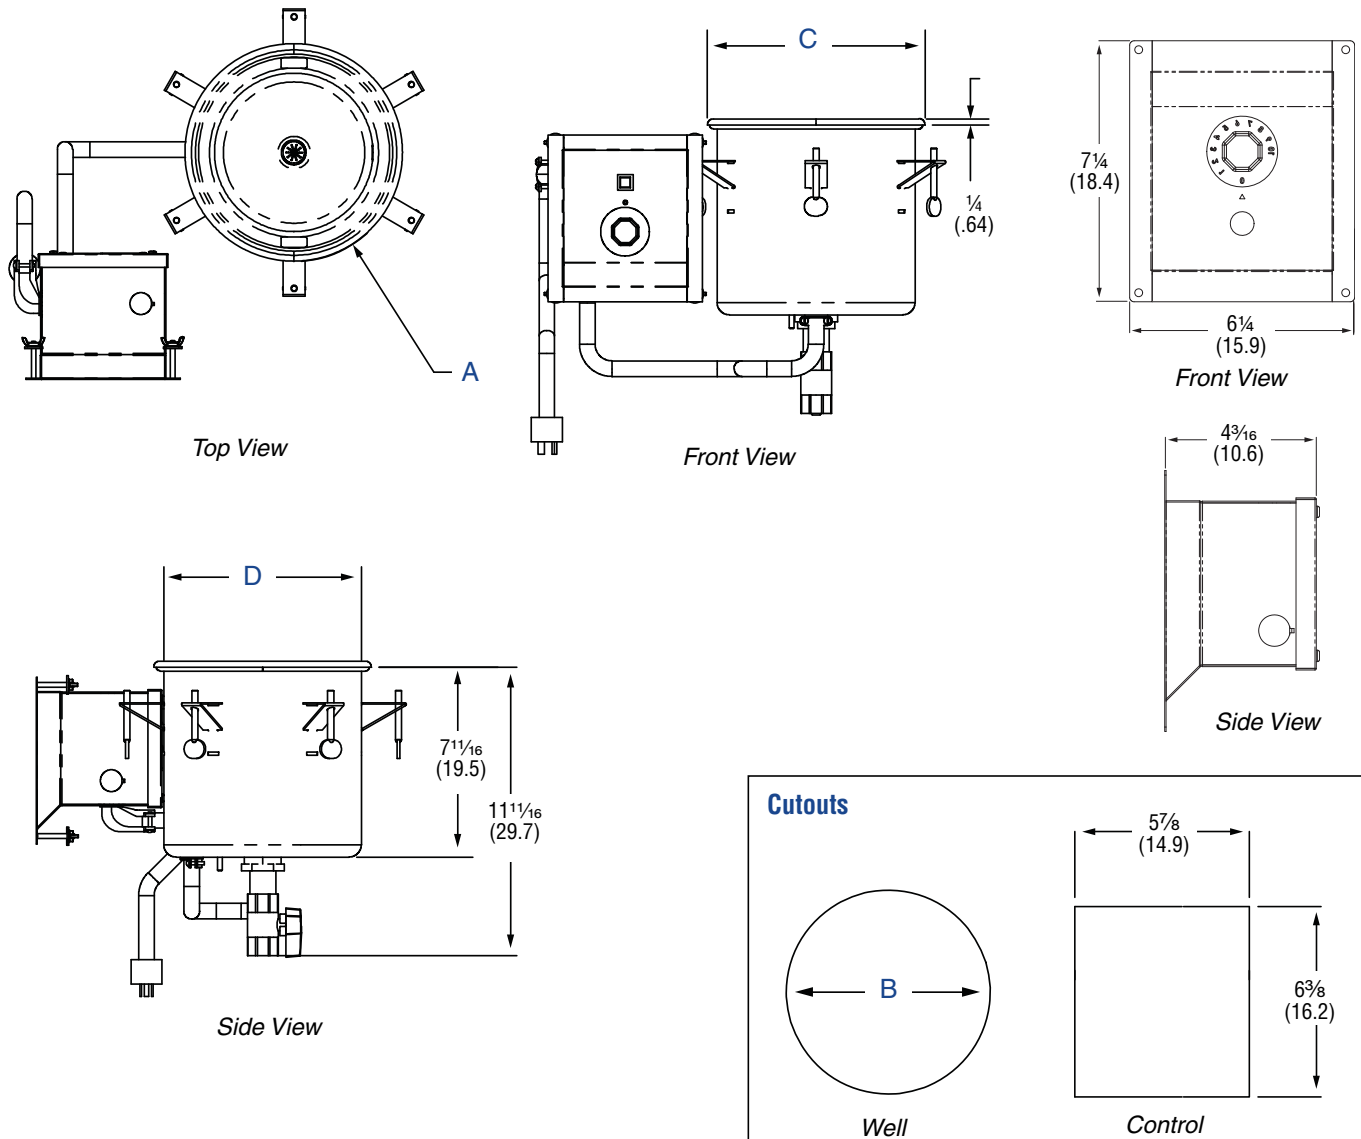

## SPECIFICATIONS

Model	Control	Capacity QT (L)	(A) Over Flange Diameter	(B) Cutout Diameter	(C) Outside Diameter	(D) Well Outer Diameter	Voltage	Watts	Amps	Plug
36462 3646210	Infinite	7 $\frac{1}{4}$ (6.9)	10 $\frac{9}{16}$ (28.4)	10 $\frac{9}{16}$ (26.8)	11 $\frac{3}{16}$ (28.4)	10 $\frac{5}{16}$ (26.2)	120V	720	6	NEMA 5-15P
36463 3646310	Infinite	7 $\frac{1}{4}$ (6.9)	10 $\frac{9}{16}$ (28.4)	10 $\frac{9}{16}$ (26.8)	11 $\frac{3}{16}$ (28.4)	10 $\frac{5}{16}$ (26.2)	208 - 240V	720-960	3.5 - 4	NEMA 6-15P
36464 3646410	Thermostatic	11 (10.5)	12 $\frac{19}{16}$ (32.5)	12 $\frac{1}{4}$ (31.1)	12 $\frac{19}{16}$ (32.5)	12 (30.5)	120V	720	6	NEMA 5-15P
36465 3646510	Thermostatic	11 (10.5)	12 $\frac{19}{16}$ (32.5)	12 $\frac{1}{4}$ (31.1)	12 $\frac{19}{16}$ (32.5)	12 (30.5)	208 - 240V	720-960	3.5 - 4	NEMA 6-15P

## Receptacle



Outperform every day.™

[www.vollrath.com](http://www.vollrath.com)

The Vollrath Company, L.L.C.  
 1236 North 18th Street  
 Sheboygan, WI 53081-3201 U.S.A.  
 Customer Service: 800.628.0830  
 Canada Customer Service: 800.695.8560  
 Main Fax: 800.752.5620 or 920.459.6573

Technical Services: 800.628.0832  
 Technical Services Fax: 920.459.5462