

Outperform every day.

Project:

Item Number:

Quantity:

SERVEWELL® HOT FOOD TABLE



ServeWell® 3-Well Hot Food Table

DESCRIPTION

We build each ServeWell[®] unit with heavy-gauge stainless steel, and engineer the body, legs, and base for strength and durability. Features

- Thermoset Fiber-Reinforced Resin Wells self-insulating and maximum energy efficiency. Will not rust or pit. Clean easily by wiping off water deposits from the non-metallic surface.
- Thermostatic Heat Controls automatically adjust for water temperature and food volume changes to reduce food waste.
- **Capillary Tube Thermostats** control supply power only when needed for maximum power efficiency.
- Low-water indicator light eliminates guesswork.
- **Dome Heating Elements** use up to 25% less energy and concentrate energy into the wells. Non-stick surface prevents scale build-up for easy cleaning and longer operating life. Cast-in elements for longer service life and greater energy transfer.
- Wells Wide no-drip lips on wells keep top surface dry. Equipped with individual brass drain valves.
- 20 gauge stainless steel top and undershelf, 16 gauge legs.
- Operator side plate shelf and cutting board are standard on hot
- Mechanical guards on all controls and power switch for safety and reliability.
- Accepts full-size or fractional pans up to 6" (15.2 cm) deep, and standard adapter plates and insets.
- Recommend using up to 4" (10.2 cm) deep food pans.
- Standard adjustable stationary legs or optional caster set.
- 10ft. (3 m) bottom-mounted power cord.
- Ships knocked down.

NOTE: ServeWell[®] Hot Food Table orders cannot be canceled or returned

WARRANTY

All models shown come with Vollrath's standard warranty against defects in materials and workmanship. For full warranty details, please refer to www.Vollrath.com.

Agency Listings





Due to continued product improvement, please consult www.vollrath.com for current product specifications.

ITEMS

Item No.	Description	Item No.	Description					
38102	700W/120V 2 Well	38004	480W/120V 4 Well					
38103	700W/120V 3 Well	38005	480W/120V 5 Well					
38104	700W/120V 4 Well	38116	600-800W/208-240V 2 Well					
38105	700W/120V 5 Well	38117	600-800W/208-240V 3 Well					
38002	480W/120V 2 Well	38118	600-800W/208-240V 4 Well					
38003	480W/120V 3 Well	38119	600-800W/208-240V 5 Well					

PERFORMANCE CRITERIA

ServeWell $^{\circledR}$ Hot Food Table are designed to hold heated prepared foods at temperatures above the HACCP "danger zone" of 140° F (60° C). The performance standard is measured using the NSF mixture preheated to 165° F (73.9° C). The unit will hold the temperature of this product above 150° F (65.6° C). The temperature will be maintained best when the food product is held using pans with covers, the proper water level is maintained in the well, and the food product is stirred regularly.

OPTIONS AND ACCESSORIES Dimensions in inches (cm)

Work/Overshelf w/o Acrylic Panel Double-Deck Overshelf



Item Length x Width x Height □ 38042 32 x 10 x 13 (81.3 x 25.4 x 33) □ 38043 46 x 10 x 13 (116.8 x 25.4 x 33) □ 38044 60¹/₁₆ x 10 x 13 (155.6 x 25.4 x 33)

□ 38045 76 x 10 x 13 (193 x 25.4 x 33) Single Deck Cafeteria Guard



Length x Width x Height □ 38052 32 x 10 x 13 (81.3 x 25.4 x 33) □ 38053 46 x 10 x 13 (116.8 x 25.4 x 33) □ 38054 60¹1/16 x 10 x 13 (155.6 x 25.4 x 33)

□ 38055 76 x 10 x 13 (193 x 25.4 x 33)



Length x Width x Height Item □ 38072 32 x 8 x 1 (81.3 x 20.3 x 2.5) □ 38073 46 x 8 x 1 (116.8 x 20.3 x 2.5) □ 38074 60¹¹/₁₆ x 8 x 1 (155.6 x 20.3 x 2.5) □ 38094 □ 38075 76 x 8 x 1 (193 x 20.3 x 2.5)

Buffet Breath Guards

4 holes per side for breath guard attachment. Length x Width x Height Item

□ 38062 32 x 35% x 23½ (81.2 x 89.8 x 59.7) □ 38063 46 x 35% x 23½ (116.8 x 89.8 x 59.7) □ 38064 60¹1/16X 353/8 X 231/2 (155.6 x 89.8 x 59.7)

w/o Acrylic Panel (Not pictured)

□ 38033 46 x 10 x 26 (116.8 x 25.4 x 66)

□ 38035 76 x 10 x 26 (193 x 25.4 x 66)

□ 38034 6011/16x 10 x 26 (155.6 x 25.4 x 66)

Length x Width x Height □ 38032 32 x 10 x 26 (81.3 x 25.4 x 66)

□ 38065 76 x 35% x 23½ (193 x 89.8 x 59.7)

Operator Side Poly Cutting Board Customer Side Plate Rest



Item Length x Width x Height □ 38092 32 x 8 x 1 (81.3 x 20.3 x 2.5) □ 38093 46 x 8 x 1 (116.8 x 20.3 x 2.5) 60¹1/₁₆ x 8 x 1 (155.6 x 20.3 x 2.5) □ 38095 76 x 8 x 1 (193 x 20.3 x 2.5)

Caster Set



Description

□ 38099 4" (10.2 cm) swivel wheels, two with brakes 4" (10.2 cm) swivel wheels, two with brakes, ADA height



Outperform every day."


1236 North 18th Street Sheboygan, WI 53081-3201 U.S.A. Main Tel: 800.624.2051 or 920.457.4851 Main Fax: 800.752.5620 or 920.459.6573

Customer Service: 800.628.0830 Canada Customer Service: 800.695.8560 Technical Services techservicereps@vollrathco.com Induction Products: 800.825.6036 Countertop Warming Products: 800.354.1970 All Other Products: 800.628.0832

The Vollrath Company, L.L.C.

www.vollrath.com

SERVEWELL® HOT FOOD TABLE **DIMENSIONS** (Shown in inches (cm)).

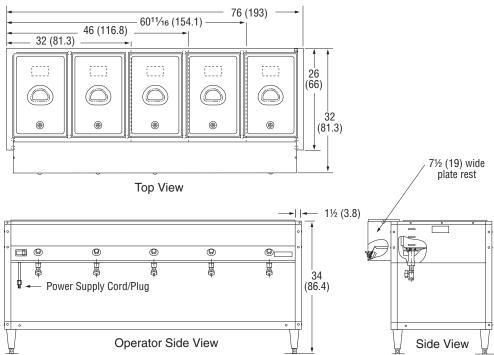

SPECIFICATIONS

01 20	11 10/11101										
lka m		Volts	Walla	Welle	Electrical						
Item	Description	(Single	Watts	Watts	Service	Amno	Dive		Dagen	tooloo	
No.		Phase Only)	Per well	Total	Amps	Amps	Plug		Recep	lacies	
700W/	120V			120V	120V	208-240V	208-240V				
38102	2-well	120	700	1400	15	11.7	NEMA 5-15P	NEMA 5-15R	□ G	□G □G	☐ ☐ ☐
38103	3-well			2100	30	17.5	NEMA 5-30P		([w)		
38104	4-well			2800	30	23.3	NEMA 5-30P				NENAA
38105	5-well			3500	50	29.2	NEMA 5-50P		NEMA 5-30R	NEMA 6-15R	NEMA 6-30R
480W/	120V			3-1311	5-30H	0 1011	0-3011				
38002	2-well		480	960	15	8	NEMA 5-15P				
38003	3-well	120		1440	15	12	NEMA 5-15P	120V			
38004	4-well			1920	20	16	NEMA 5-20P		120V	208-240V	
38005	5-well			2400	30	20	NEMA 5-30P		□G □G	UG	
600-80	OW/208-240\	I									
38116	2-well	- 208-240	1	1200-1600	15	6.7	NEMA 6-15P	NEMA 5-20R	NENAA		
38117	3-well			1800-2400	15	10	NEMA 6-15P		NEMA 5-50R	NEMA	
38118	4-well			2400-3200	20	13.3	NEMA 6-20P		J-3011	6-20R	
38119	5-well			3000-4000	30	16.6	NEMA 6-30P				
								_			

Notes: Dedicated circuit may be required for higher currents. ServeWell® Hot Food Table orders cannot be canceled or returned.



Outperform every day.

www.vollrath.com

The Vollrath Company, L.L.C. 1236 North 18th Street

Sheboygan, WI 53081-3201 U.S.A. Main Tel: 800.624.2051 or 920.457.4851 Main Fax: 800.752.5620 or 920.459.6573 Customer Service: 800.628.0830 Canada Customer Service: 800.695.8560

Technical Services techservicereps@vollrathco.com Induction Products: 800.825.6036 Countertop Warming Products: 800.354.1970 All Other Products: 800.628.0832