



**Project:**

**Item Number:**

**Quantity:**

**SIGNATURE SERVER® CLASSIC COLD FOOD STATIONS**



*Signature Server® Classic Cold Food Stations*

**FEATURES**

- Vollrath's Signature Server® Classic Cold Food Stations are available in non-refrigerated and refrigerated models
- Reinforced stainless steel unibody construction provides extra durability in a lightweight, mobile base
- Base is 18-gauge 300 Series stainless steel clad with black laminate. Optional colors and finishes are also available.
- Top is one-piece 18-gauge 300 Series stainless steel
- Optional 14 gauge work surface available
- Well constructed of 18-gauge 300 Series stainless steel
- Foamed-in-place polyurethane insulation
- R134A refrigerant
- Drain hose on operator side of base
- Heavy-duty 4" (10 cm) swivel casters with brakes
- 8 ft. (2.4 m) cord
- Non-refrigerated models are NSF2
- Refrigerated models are not NSF
- Storage not available on 46" models

**DESCRIPTION**

Signature Server® Classic is the choice when functionality and modular ease of use are your top priorities. Signature Server® Serving Equipment is an industry standard, with updated features to better serve the operator.

**Note: Signature Server® equipment orders cannot be cancelled or returned.**

**WARRANTY:** All models shown come with Vollrath's standard warranty against defects in materials and workmanship. For full warranty details, please refer to the Vollrath Equipment and Smallwares Catalog.

**MODELS AND OPTIONS**

Base					Options			Breath Guards	Lighting	Accessories
Width	Style	Height / Item No			Color (Black is standard)					
		27 (69)	30 (76)	34 (86)	Matte Laminate	Wood Grain	Stainless Steel			
46" (117)	Non-Refrig	36243	36143	37043	36680	36687	36693	<b>Choose from:</b> Progressive, Contemporary, Traditional, Classic Cafeteria, Classic Economy Buffet, Access® and Classic Speed Serve. See Breath Guard spec sheets for selection information.	<b>Choose from:</b> Incandescent, or fluorescent lights. See Breath Guard spec sheets for selection information.	<b>Choose from:</b> plate rests, cutting boards, end shelf, tray slides, storage modules, false bottoms, bag in box, stationary legs. See Accessories spec sheet for selection information.
	Refrig	36245	36145	37045						
60" (152)	Non-Refrig	36260	36160	37060	36681	36688	36694			
	Refrig	36265	36165	37065						
74" (188)	Non-Refrig	36270	36170	37070	36682	36689	36695			
	Refrig	36275	36175	37075						
88" (224)	Non-Refrig	-	-	98707	98835	98835	93836			
	Refrig	-	-	98708						

*Use only Vollrath accessories, including breath guards. Vollrath is not responsible for the fit or installation of custom made accessories and components. Custom accessories and components may void agency listings.*

**Agency Listings**



Refrigerated models are not NSF

Due to continued product improvement, please consult [www.vollrathco.com](http://www.vollrathco.com) for current product specifications.

Approvals	Date



Setting the Standard™


[www.vollrathco.com](http://www.vollrathco.com)

The Vollrath Company, L.L.C.  
 1236 North 18th Street  
 Sheboygan, WI 53081-3201 U.S.A.  
 Customer Service: 800.628.0830  
 Canada Customer Service: 800.695.8560  
 Main Fax: 800.752.5620 or 920.459.6573


Technical Services: 800.628.0832  
 Technical Services Fax: 920.459.5462

## SIGNATURE SERVER® CLASSIC COLD FOOD STATIONS


DIMENSIONS Dimensions shown in inches (cm).



Top View

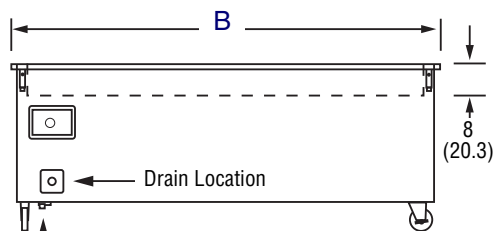

Operator Side View




End View

Model		(A) Pan Width	(B) Overall Width	(B) Height
Non-Refrig	Refrig			
36243	36245	37 $\frac{3}{4}$ (95.9)	46 (117)	27 (69)
36143	36145			30 (76)
37043	37045			34 (86)
36260	36265	50 $\frac{1}{4}$ (127.6)	60 (152)	27 (69)
36160	36165			30 (76)
37060	37065			34 (86)
36270	36275	63 (160)	74 (188)	27 (69)
36170	36175			30 (76)
37070	37075			34 (86)
-	-	75 $\frac{3}{4}$ (192.4)	88 (224)	27 (69)
-	-			30 (76)
98707	98708			34 (86)

## NON-REFRIGERATED ELECTRICAL SPECIFICATIONS

Base Unit Voltage	Lighting Choice	Width / Total Amps				Plug
		46 (117)	60 (152)	74 (188)	88 (224)	
120	Fluorescent	0.6	0.5	0.5	0.3	5-15P
	Incandescent	0.6	0.8	1	1.3	5-15P
	None	-	-	-	-	-


## Receptacle



## REFRIGERATED ELECTRICAL SPECIFICATIONS

Base Unit Voltage	Lighting Choice	Width / Total Amps				Compressor (HP)	Plug
		46 (117)	60 (152)	74 (188)	88 (224)		
120	Fluorescent	4.1	5.5	5.5	7.8	$\frac{1}{4}$	5-15P
	Incandescent	4.2	6	6.2	8.4	$\frac{1}{4}$	5-15P
	None	3.8	5.2	5.2	7.2	$\frac{1}{4}$	5-15P

## Receptacle



www.vollrathco.com

The Vollrath Company, L.L.C.  
1236 North 18th Street  
Sheboygan, WI 53081-3201 U.S.A.  
Customer Service: 800.628.0830  
Canada Customer Service: 800.695.8560  
Main Fax: 800.752.5620 or 920.459.6573

Technical Services: 800.628.0832  
Technical Services Fax: 920.459.5462