

# PIZZA PREP TABLES



Mdl PICL1-50-6



Mdl PICL2-71-9



Mdl PICL3-92-12


## FEATURES

- ▶ Stainless steel series 430 exterior doors, fronts & sides
- ▶ Stainless steel series 304 interior doors, sides & flooring
- ▶ Stucco aluminum back panel
- ▶ Self closing hinged doors with 90° stay open feature
- ▶ Recessed door handle on front of door
- ▶ Interior wall louvers provide full circulation to keep food fresh
- ▶ Compartment barrier prevents food spillage to storage area
- ▶ Lift-off compartment door hinges for easy cleaning
- ▶ Lift-up compartment stainless steel lid
- ▶ LED digital temperature display - range 32° to 50°F
- ▶ Automatic defrost by thermostat cycle
- ▶ Electronic thermostat controller
- ▶ PVC coated adjustable steel shelves
- ▶ Removable door gasket for easy cleaning
- ▶ Standard 5" industrial casters / front locking
- ▶ Thick 2.5" foamed in place polyurethane insulation
- ▶ Refrigerant CFC-free R-134a
- ▶ 8-ft power cord and plug set

## SPECIFICATIONS

Model	Doors / Shelves	Pans	Cutting Board	External Dimensions W x D x H	Gross Cu Ft	Shipping Weight	Amps	H/P	Electrical
PICL1-50-6	1 / 2	6 x 1/3	19.5 x 1/2"	49.9" x 31.5" x 42.8"	13	345	5.9	1/5	115/120V, 60Hz
PICL2-71-9	2 / 4	9 x 1/3	19.5 x 1/2"	70.9" x 31.5" x 42.8"	22.6	415	8.1	1/3	115/120V, 60Hz
PICL3-92-12	3 / 6	12 x 1/3	19.5 x 1/2"	91.9" x 31.5" x 42.8"	32.0	583	11.1	1/2	115/120V, 60Hz

*The equipment is intended for use in an area where the environmental conditions are controlled and maintained such that the ambient temperature typically does not exceed 86°F (30°C).*

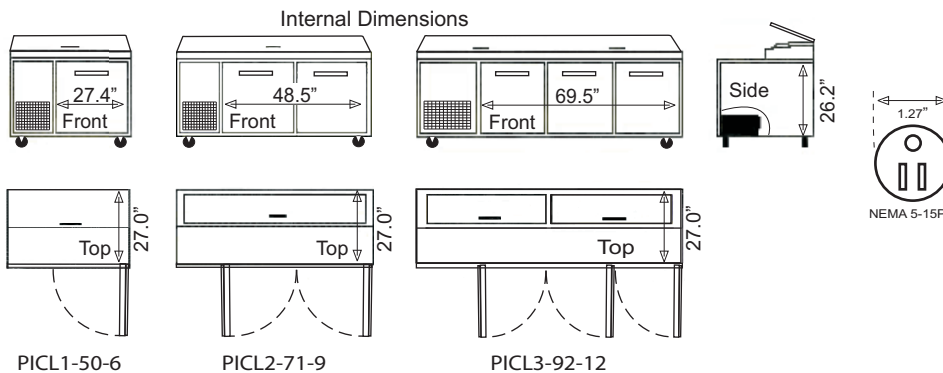

### WARRANTY

18 Months Parts and Labor  
5 Years Compressor (part only)

Administered by:  
Metalrio Solutions  
(888) 403-0070 Toll Free



Certified to ANSI/NSF 7 Standards  
Product design and specifications are subject to modification by manufacturer without prior notice.