


# SINGLE DOOR CUSTOM BACK BAR COOLER

## Perlick Features

- Front vented compressor.
- Self-closing field reversible door and lock.
- Approved for ANSI/NSF #7 open food.
- Quiet running, high efficiency compressor.
- Two inch foamed-in-place insulation provides greater energy efficiency and structural strength.
- Low-E glass door improves insulation and resists condensation on glass.
- Compact fluorescent light above the door fully illuminates interior.
- Heavy-duty reinforced base will not bend or sag.
- Heavy-duty polyethylene door sill.
- Stainless steel exterior.
- Heavy-duty stainless steel hinges.
- Epoxy coated evaporator coil.
- Vinyl coated shelves.
- Stainless steel top Included.
- Multiple door finish options.
- Condensing unit installed left or right end.

## MODEL NOS.

□ BS32

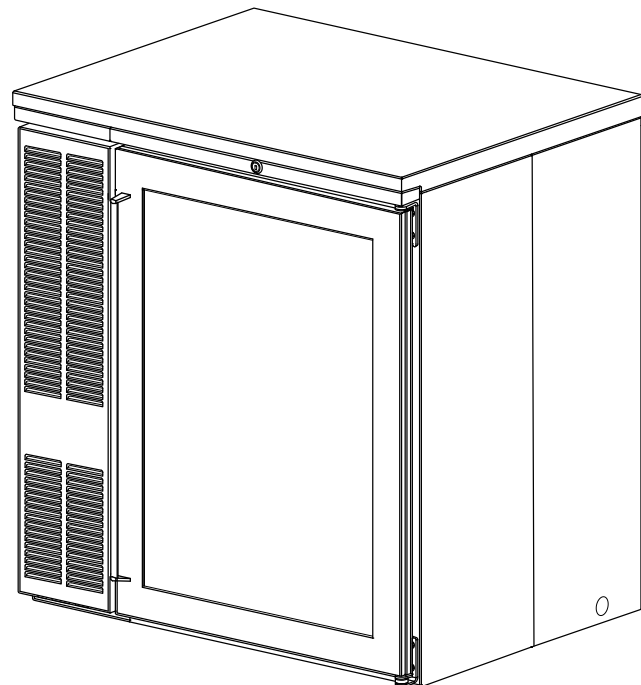


8300 West Good Hope Road • Milwaukee, WI 53223 • Phone 414-353-7060 • Fax 414-353-7069  
Toll Free 800-558-5592 • E-Mail: [Perlick@Perlick.com](mailto:Perlick@Perlick.com) • [www.Perlick.com](http://www.Perlick.com)

Form No. 110305  
Rev. 08.31.10

# Sizes and Specifications


## Single Door Custom Back Bar Cooler

Job \_\_\_\_\_  
 Area \_\_\_\_\_  
 Item No. \_\_\_\_\_  
 Model No. \_\_\_\_\_



MODEL NOS.		BS32*			
CABINET DIMENSIONS	Length - Inches (mm)	32" (813)			
	Depth - Inches (mm)	24 <sup>3</sup> / <sub>4</sub> " (629)			
	Height - Inches (mm)	34 <sup>1</sup> / <sub>2</sub> " (876)			
CASE CAPACITY (based on 12 oz. Long Neck bottle)		6			
RUNNING LOAD -AMPS		2.7			
SHIP WT. Lbs. (kg.)		210 (96)			
INTERIOR	<b>Door sill:</b> High strength polyethylene. <b>Door pan and ceiling:</b> High strength polystyrene. <b>Floor pan and Walls:</b> Stainless steel. Includes pilasters, (2) vinyl coated shelves and floor rack per door, and interior lights.				
EXTERIOR	Front, back, top and sides stainless steel. Bottom galvanized steel. See optional accessories for door & grille finishes.				
DOOR HINGING	Stainless steel hinge with standard location as illustrated. Must specify if hinging is required on left side. Field reversible.				
DOOR HARDWARE	<b>Door handles:</b> Choice of full length stainless steel, classic 6" black vinyl wrapped pull or top mounted stainless steel pull tab. <b>Lock finish:</b> chrome.				
REFRIGERATION	R-134a capillary tube-type. Aluminum fin and copper tube evaporator, epoxy coated coil. Adjustable temperature control. Self-defrosting. Condensing unit installed left or right end.				
ELECTRICAL	115V, 60Hz., 1 phase AC. Furnished with 3-prong, 6 foot NEMA5-15 PC cord. Contact Perlick for other voltage/frequency requirements.				
PLUMBING	Evaporator condensate is removed automatically. Optional floor drain with 3/4" NPT at right end or 1" NPS out bottom come plugged from factory.				
INSULATION	Foamed-in-place polyurethane, 2" walls, 1 1/2" top.				
OPTIONAL ACCESSORIES & MODIFICATIONS	<table border="0" style="width: 100%;"> <tr> <td style="vertical-align: top;"> <ul style="list-style-type: none"> <li>• Leg set</li> <li>• Laminated top</li> <li>• Laminated ends</li> <li>• Compressor right</li> <li>• Brass hardware (classic &amp; full length only)</li> <li>• Caster sets</li> <li>• Base plates</li> </ul> </td> <td style="vertical-align: top; text-align: center;"> <p><b>Door finishes</b></p> <ul style="list-style-type: none"> <li>Black vinyl coated</li> <li>Stainless steel</li> <li>Customer choice of laminate</li> <li>Prepared for field lamination</li> <li>Glass door with black vinyl coated frame</li> <li>Glass door with stainless steel frame</li> <li>Glass door with laminated frame</li> </ul> </td> <td style="vertical-align: top; text-align: center;"> <p><b>Grille finishes</b></p> <ul style="list-style-type: none"> <li>Black vinyl coated</li> <li>Stainless steel</li> <li>Customer choice of laminate</li> </ul> </td> </tr> </table>		<ul style="list-style-type: none"> <li>• Leg set</li> <li>• Laminated top</li> <li>• Laminated ends</li> <li>• Compressor right</li> <li>• Brass hardware (classic &amp; full length only)</li> <li>• Caster sets</li> <li>• Base plates</li> </ul>	<p><b>Door finishes</b></p> <ul style="list-style-type: none"> <li>Black vinyl coated</li> <li>Stainless steel</li> <li>Customer choice of laminate</li> <li>Prepared for field lamination</li> <li>Glass door with black vinyl coated frame</li> <li>Glass door with stainless steel frame</li> <li>Glass door with laminated frame</li> </ul>	<p><b>Grille finishes</b></p> <ul style="list-style-type: none"> <li>Black vinyl coated</li> <li>Stainless steel</li> <li>Customer choice of laminate</li> </ul>
<ul style="list-style-type: none"> <li>• Leg set</li> <li>• Laminated top</li> <li>• Laminated ends</li> <li>• Compressor right</li> <li>• Brass hardware (classic &amp; full length only)</li> <li>• Caster sets</li> <li>• Base plates</li> </ul>	<p><b>Door finishes</b></p> <ul style="list-style-type: none"> <li>Black vinyl coated</li> <li>Stainless steel</li> <li>Customer choice of laminate</li> <li>Prepared for field lamination</li> <li>Glass door with black vinyl coated frame</li> <li>Glass door with stainless steel frame</li> <li>Glass door with laminated frame</li> </ul>	<p><b>Grille finishes</b></p> <ul style="list-style-type: none"> <li>Black vinyl coated</li> <li>Stainless steel</li> <li>Customer choice of laminate</li> </ul>			

\* Energy Star approved (solid door only).

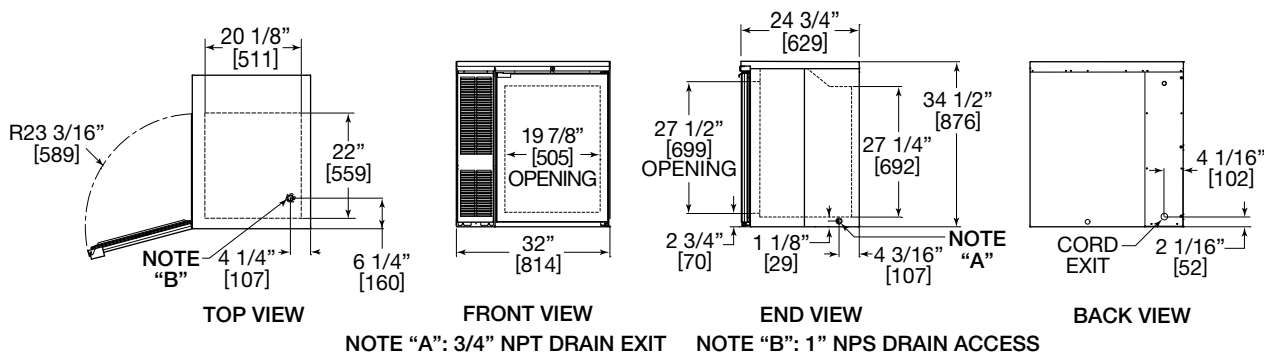

8300 West Good Hope Road • Milwaukee, WI 53223 • Phone 414-353-7060 • Fax 414-353-7069  
 Toll Free 800-558-5592 • E-Mail: Perlick@Perlick.com • www.Perlick.com

Perlick is committed to continuous improvement.  
 Therefore, we reserve the right to change specifications without prior notice.

Form No. 130305  
 Rev. 08.31.10

KaTom Restaurant Supply, Inc.