

24" ADA-COMPLIANT FREEZER

Perlick Features

- 32" height with leveling legs.
- Designed for maximum capacity while adhering to strict 34-inch counter height ADA-compliant requirements.
- Fully-integrated depth allows flush fit with surrounding cabinetry.
- Zero-clearance hinging allows for abutment with surrounding cabinetry.
- With 3/4-inch wood overlay* the unit will stand flush with cabinetry.
- Best in Class 700 Btu commercial-grade compressor.
- Front-vented RAPIDcool forced-air refrigeration system.
- Commercial-grade stainless steel interior.
- Industry-exclusive convertible door design allows all doors the ability to be converted to wood overlay* from stainless steel.
- Available with solid stainless steel or solid wood overlay* doors, stainless steel or solid wood drawers.
- Industry-exclusive full-extension adjustable pull-out shelves provide easy access.
- Full-extension drawers pull completely out of unit to allow easy storage and access to freezer contents.
- Equipped with automatic hot gas defrost for maintenance-free defrosting.
- Freezer temperature -10° to +10°F.

* Wood overlay by others.

MODEL NOS.

- HA24FB-1L
- HA24FB-1R
- HA24FB-2L
- HA24FB-2R
- HA24FB-5
- HA24FB-6



HA24FB-1L



HA24FB-5



8300 West Good Hope Road • Milwaukee, WI 53223 • Phone 414-353-7060 • Fax 414-353-7069
Toll Free 800-558-5592 • E-Mail: Perlick@Perlick.com • www.Perlick.com

Form No. 062910

Sizes and Specifications

24" ADA-Compliant Freezer

Job _____
 Area _____
 Item No. _____
 Model No. _____




HA24FB-1L



HA24FB-5

SERIES NOS.		HA24FB Series Freezers	
CABINET DIMENSIONS	Length - Inches (mm)	23 7/8" (607)	
	Depth - Inches (mm)	23 15/16" (609)	
	Height - Inches (mm)	32" (812)	
MODEL NOS.	DOOR STYLES		
HA24FB-1L	Solid stainless steel door, hinge left		
HA24FB-1R	Solid stainless steel door, hinge right		
HA24FB-2L	Integrated solid wood overlay* door, hinge left		
HA24FB-2R	Integrated solid wood overlay* door, hinge right		
HA24FB-5	Solid stainless steel drawers		
HA24FB-6	Integrated solid wood overlay* drawers		
INTERIOR VOLUME - CUBIC FOOT (m ³)		4.3 (12)	
SHELVING		2 Full Extension Shelves	
TEMPERATURE RANGE		-10°F to +10°F (-23C to -12C)	
RUNNING LOAD - AMPS		2.3	
CONDENSER UNIT H.P.		1/6 HP	
SHIP WT Lbs. (kg)		185 (84)	
INTERIOR	All stainless steel interior.		
EXTERIOR	Black vinyl clad top and sides. Galvanized back. See door finishes under door styles above.		
REFRIGERATION	R-134a capillary tube-type with hermetic compressor. Front access condenser. Freezer equipped with automatic hot gas defrost cycle.		
ELECTRICAL	115V, 60Hz., 1 phase, furnished with 3-prong NEMA 5-15 plug, 6 foot long cord.		
PLUMBING	None required. Moisture drains to self evaporating condensate pan.		
OPTIONAL ACCESSORIES	• Door lock • Adjustable leg kits • Caster kit		
WARRANTY	1 year parts & labor; 5 year compressor.		

* Wood overlay by others.

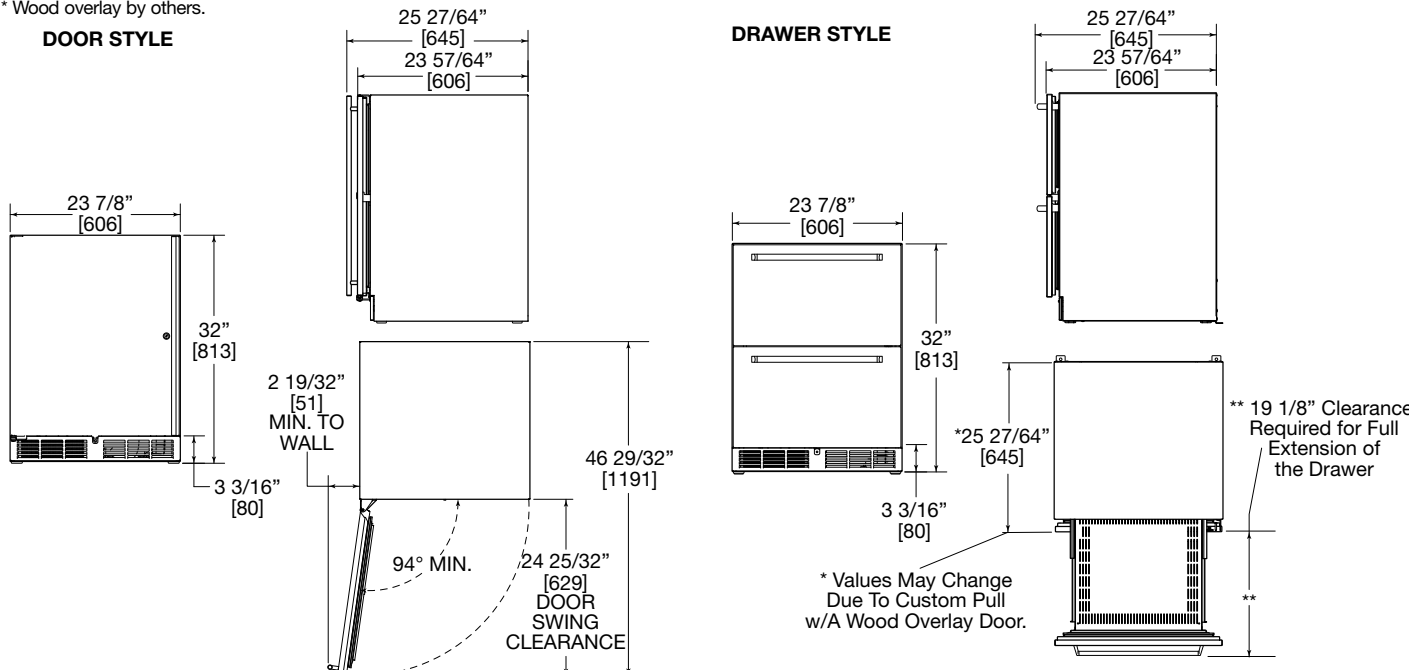

8300 West Good Hope Road • Milwaukee, WI 53223 • Phone 414-353-7060 • Fax 414-353-7069
 Toll Free 800-558-5592 • E-Mail: Perlick@Perlick.com • www.Perlick.com

Perlick is committed to continuous improvement. Therefore, we reserve the right to change specifications without prior notice. Form No. 062910