



JOB	
AREA	
ITEM NO.	
MODEL NO.	

MODELS				
TS Series	TSD Series			
TS18IC	TSD18IC			
TS24IC	TSD24IC			
TS30IC	TSD30IC			
TS36IC	TSD36IC			
TS42IC	TSD42IC			
TS48IC	TSD48IC			



Perlick Features


- Dent resistent ABS top ledge
- Stainless steel legs install without tools and have rust-free thermoplastic feet



ICE CHESTS STANDARD, WITHOUT COLD PLATE

MODEL NOS.	TS(D)18IC	TS(D)24IC	TS(D)30IC	TS(D)36IC	TS(D)42IC	TS(D)48IC		
LENGTH IN. (mm)	18 (457)	24 (610)	30 (762)	36 (914)	42 (1067)	48 (1219)		
ICE CAP. lbs. (kg)	35 (15.8)	50 (22.7)	70 (31.8)	85 (38.6)	100 (45.4)	115 (52.2)		
SHIP WT. lbs. (kg)	50 (22.7)	60 (27.2)	70 (31.8)	80 (36.3)	90 (40.1)	100 (45.4)		
FRONT & SIDES	Stainless steel, top rim ABS							
BACKSPLASH	General and TS Series: Stainless steel 6" high (4" optional) with 1" return at top, mechanically fastened and sealed to ice chest top with steel support brackets TSD Series: Backlash and rear deck stainless steel							
BACK & BOTTOM	Galvanized steel							
COVERS	Stainless steel, two-piece, removable							
INTERIOR	Stainless steel with 1/4" radius corners, welded and sealed. Interiors can be divided with accessory freestanding ice dividers							
INSULATION	Foamed-in-place polyurethane							
LEGS	1-5/8" tubular, stainless steel with 1" adjustable thermoplastic foot (4 legs are standard)							
PLUMBING	Drain connection– 1/2" NPS male							

Note: Covers not included.

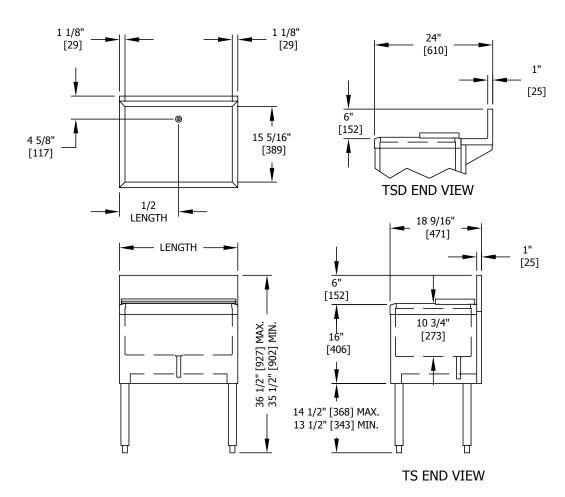

Form No. IC02 Rev. 09.19.2017